

Contender™ Series Factory Sealed Manual Motor Starters and Contactors

Explosionproof, Dust-Ignitionproof

NEC/CEC:

Class I, Division 1 and 2, Groups C, D

Class II, Division 1 and 2, Groups E, F, G

Class III

NEMA 3, 7CD, 9EFG

Applications

- Manual motor starters are available to meet any plant installation requirement.
- They may be used to install a variety of electrical wiring devices and comes complete with covers and dead-end or feed-thru hub arrangements. Available with or without the heater.
- Complete units are ideal for manual starting of small Vac or Vdc motors in locations made hazardous by the presence of flammable vapors, gases or combustible dust.

Features

- Easily readable operator handle with provisions for padlocking in the ON or OFF position.
- Cast in hubs.
- Interchangeable heater units.

Standard Materials

- Body and cover: malleable iron
- Sealing chamber: copperfree (4/10 of 1% max.) aluminum
- Operating handle: nylon

Standard Finishes

- Body and cover: gray epoxy powder coat

Options

- For Aluminum Backbox and Cover add suffix **-SA**.
- Starters are furnished with one interchangeable heater. Select heater number from heater selection table and add appropriate suffix to catalog number. For example, a complete catalog number with Allen-Bradley ◀ motor starter and Allen-Bradley ◀ 0-17 amp heater: EPS2199-P1.

NEC/CEC Certifications and Compliances

- UL Standards: UL 508, UL 698, UL 1203,
- CSA Standards: CSA C22.2 No. 14-M, C22.2 No. 25, C22.2 No. 30
- cULus Listed: E81751, E76550



1-Gang
Dead-End



2-Gang
Feed-Thru

CONTROLS: NEC/CEC EXPLOSIONPROOF MOTOR STARTERS

Appleton®

◀ Allen-Bradley is a registered trademark of Rockwell Automation.

Contender™ Series Factory Sealed Manual Motor Starters and Contactors

Explosionproof, Dust-Ignitionproof

NEC/CEC:
Class I, Division 1 and 2, Groups C, D
Class II, Division 1 and 2, Groups E, F, G
Class III
NEMA 3, 7CD, 9EFG



Factory Sealed Manual Motor Starters with Cutler-Hammer + Devices

Poles	Hub Size (Inches)	Catalog Number Cover/Chamber/Device	1-Gang Catalog Number ①		2-Gang Catalog Number ①	
			Dead-End	Feed-Thru	Dead-End	Feed-Thru
1	1/2	EDSK-1MSW	EDS11101	EDSC11101	—	—
	3/4		EDS21101	EDSC21101	EDS22101	EDSC22101
	1		EDS31101	EDSC31101	EDS32101	EDSC32101
2	1/2	EDSK-2MSW	EDS11102	EDSC11102	—	—
	3/4		EDS21102	EDSC21102	EDS22102	EDSC22102
	1		EDS31102	EDSC31102	EDS32102	EDSC32102

Manual Motor Starter Horsepower Ratings

Poles	120–240 Vac	32 Vdc	120 Vdc	240 Vdc	Cutler-Hammer + Catalog Number
1	1 HP	1/4 HP	—	1/4 HP	MST01
2	1 HP	1/4 HP	1 HP	1 HP	MST02



Factory Sealed Motor Rated Switches — No Heater Options

Poles	Hub Size (Inches)	Catalog Number Cover/Chamber/Device	1-Gang Catalog Number		2-Gang Catalog Number	
			Dead-End	Feed-Thru	Dead-End	Feed-Thru
2	1/2	EDSK-MC2	EDS11MC2	EDSC11MC2	—	—
	3/4		EDS21MC2	EDSC21MC2	EDS22MC2	EDSC22MC2
	1		EDS31MC2	EDSC31MC2	EDS32MC2	EDSC32MC2
3	1/2	EDSK-MC3	EDS11MC3	EDSC11MC3	—	—
	3/4		EDS21MC3	EDSC21MC3	EDS22MC3	EDSC22MC3
	1		EDS31MC3	EDSC31MC3	EDS32MC3	EDSC32MC3

Manual Contactor Switch Ratings

Poles	Description	Rating
2	Square D – Class 2510, Type KO-1	30 Amp, 250 Vac/Vdc; 20 Amp, 600 Vac; 1 HP, 115 Vac; 2 HP, 230 Vac; 3 HP, 460-575 Vac
3	Arrow-Hart – AH7810-UD	30 Amp, 600 Vac; 3 HP, 120 Vac; 7-1/2 HP, 240 Vac; 15 HP, 480 Vac; 15 HP 600 Vac

+ Cutler-Hammer is a registered trademark of Eaton Corporation.

① **Ordering Instructions:** Starters and starter cover assemblies are furnished with one interchangeable heater. Select heater number from heater selection table and add appropriate suffix to catalog number. For example, a complete catalog number with Cutler-Hammer motor starter and Cutler-Hammer heater: EDS11101-W1. Available in aluminum — add suffix -SA.

Contender™ Series Factory Sealed Manual Motor Starter and Contactor Heaters

Allen-Bradley ◀ and Cutler-Hammer ⚡ heaters and starters are not interchangeable with each other.

NEC/CEC:

Class I, Division 1 and 2, Groups C, D
Class II, Division 1 and 2, Groups E, F, G
Class III
NEMA 3, 7CD, 9EFG

The "Full Load Motor Current" listed in the tables below are ratings which determine the proper heat element that should be used with the EDS Series starters. Refer to motor nameplate for its full load motor current. It is our recommendation that for normal conditions the heater element selected should have a capacity of 20 to 25% greater than the full load current of the motor. This applies to standard +40 °C (+104 °F) temperature rise motors. For +50 °C (+122 °F) rise motors, a heater not greater than 115% full load current should be selected.

However, due to the difference between full load motor currents of various motor manufacturers of the same size motors, the above information is approximate.

If selection of heater element is uncertain as might be in the case of a motor subject to frequent starting and intermittent load, it is advisable to contact the starter manufacturer or his local representative giving full particulars, such as motor horsepower, voltage, phase cycles, name or manufacturer or pertinent data that may aid in the selection of the proper heater element.

Allen-Bradley ◀

Full Load Motor Current (Amp)	Add Suffix Contender/EDS
0.17	P1
0.21	P2
0.25	P3
0.32	P4
0.39	P5
0.46	P6
0.57	P7
0.71	P8
0.79	P9
0.87	P10
0.98	P11
1.08	P12
1.19	P13
1.30	P14
1.43	P15
1.58	P16
1.75	P17
1.88	P18
2.13	P19
2.40	P20
2.58	P21
2.92	P22
3.09	P23
3.32	P24
3.77	P25
4.16	P26
4.51	P27
4.93	P28
5.43	P29
6.03	P30
6.83	P31
7.72	P32
8.24	P33
8.90	P34
9.60	P35
10.80	P36
12.00	P37
13.50	P38
15.20	P39

Cutler-Hammer ⚡

Full Load Motor Current (Amp)	Heater Rating (Amp)	Add Suffix Contender
0.40-0.43	0.50	W1
0.44-0.48	0.55	W2
0.49-0.53	0.61	W3
0.54-0.58	0.67	W4
0.59-0.64	0.74	W5
0.65-0.71	0.81	W6
0.72-0.78	0.89	W7
0.79-0.87	0.98	W8
0.88-0.95	1.10	W9
0.96-1.03	1.20	W10
1.04-1.15	1.30	W11
1.16-1.27	1.45	W12
1.28-1.35	1.60	W13
1.36-1.51	1.70	W14
1.52-1.67	1.90	W15
1.68-1.83	2.10	W16
1.84-1.99	2.30	W17
2.00-2.23	2.50	W18
2.24-2.47	2.80	W19
2.48-2.71	3.10	W20
2.72-2.95	3.40	W21
2.96-3.27	3.70	W22
3.28-3.59	4.10	W23
3.60-3.99	4.50	W24
4.00-4.39	5.00	W25
4.40-4.79	5.50	W26
4.80-5.26	6.00	W27
5.27-5.83	6.60	W28
5.84-6.39	7.30	W29
6.40-7.03	8.00	W30
7.07-7.74	8.80	W31
7.75-8.46	9.70	W32
8.47-9.35	10.60	W33
9.36-10.30	11.70	W34
10.31-11.35	12.90	W35
11.36-12.47	14.20	W36
12.48-13.67	15.60	W37
13.68-15.12	17.10	W38
15.13-16.00	18.60	W39

⚡ Cutler-Hammer is a registered trademark of Eaton Corporation.

◀ Allen-Bradley is a registered trademark of Rockwell Automation.


Contender™ Series Factory Sealed Manual Motor Starter and Contactor

Explosionproof, Dust-Ignitionproof


NEC/CEC:
 Class I, Division 1 and 2, Groups C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 NEMA 3, 7CD, 9EFG

Dimensions in Millimeters (Inches)


1-Gang and 2-Gang



1-Gang Front



1- 2- Gang Side

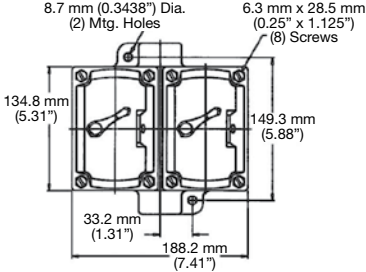

2-Gang Front

Hub Size (Inches)	Dimensions in Millimeters (Inches)		
	A	B	C
1/2	153.9 (6.06)	172.9 (6.81)	19.0 (0.75)
3/4	153.9 (6.06)	172.9 (6.81)	22.3 (0.88)
1	156.7 (6.17)	178.5 (7.03)	25.4 (1.00)

CONTROLS: NEC/CEC EXPLOSIONPROOF MOTOR STARTERS

