

DURAPULSE GS4 AC Drives – Introduction

DURAPULSE GS4 AC Drives																							
Motor Rating	HP	1	2	3	5	7.5	10	15	20	25	30	40	50	60	75	100	125	150	175	215	250	300	
	kW	0.75	1.5	2.2	3.7	5.5	7.5	11	15	18.5	22	30	37	45	55	75	90	110	132	160	185	220	
230V Single-Phase Input / 230V Three-Phase Output		✓	✓	✓	✓	✓	✓	✓	✓	✓													
230V Three-Phase Input/Output		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓							
460V Three-Phase Input/Output		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓



Overview

The DURAPULSE GS4 series of AC drives includes many of the same standard features as our GS family of drives including dynamic braking, PID, removable keypad, and RS-485 Modbus communication.

The GS4 drive expands the DURAPULSE family by adding single-phase input capability (ALL 230VAC drives can be supplied single-phase), a built-in PLC, serial BACnet, and optional EtherNet/IP and ModTCP cards. GS4 QuickStart menus simplify configuration by consolidating the most-often-used parameters into concise groups.

DURAPULSE GS4 AC drives also offer sensorless vector control for improved speed regulation. The smart keypad is designed with defaults to quickly allow you to configure the drive, set the speed, start and stop the drive, and monitor critical parameters of your application. In addition, up to four drive configurations can be stored in the keypad, and transferred to additional DURAPULSE GS4 drives of the same model. Users can also store up to 32 parameters of their choice in a custom Quick-Start menu.

DURAPULSE GS4 offers three analog inputs, two analog outputs, one frequency output, ten digital inputs, two digital outputs, two SPDT relay outputs, and two STO inputs. All of the analog and digital I/O (except the Start/Stop and STO inputs) can be configured for a wide variety of input or output functions. Three option cards expand the I/O offering with a relay output card, an AC input card, and a combo DC I/O card.

Features

- Wide Offering from 1 to 300 hp
- Single-Phase/Three-Phase 230VAC Three-Phase 460VAC
- Single-Phase UL Ratings – 230VAC input for 1 to 100 hp models (see selection tables for derated output)
- Dual Rating Design – CT/VT Ratings (Light & Heavy Duty)
- Flexible Carrier Frequency to 15kHz and Output Frequency to 599Hz
- STO – Safe Torque Off (TUV Certified)
- Built-in PLC to support up to 10k steps
- Free downloadable software for Drive Configuration and PLC Programming
- Field-upgradable Firmware via USB port (Drive, Keypad, & Communication Option Cards)
- Hot-Pluggable LCD Text-Based Keypad (IP20/NEMA 1) can be remotely mounted
- Embedded Quick-Start Menus
- Local/Remote control mode selection from the Keypad or digital/comm input with Hand/Off/Auto Control
- Display Units of Measure of your choice (GPM, FPM, etc.)
- Momentary Power Loss Restarts
- 100kA Short Circuit Current Rating
- Built-In DC Choke (some models)
- Flange-Mount Capability for frame sizes A to F (1 to 215 hp)
- Conduit Box(s) for NEMA 1 (Frame sizes D0 to G)
- Expanded I/O capability – 110V Inputs, Relay Outputs, combo DC I/O card
- Analog I/O – Configurable 3 Inputs and 2 Outputs
- Auto Speed Search capability
- Multi-Motor (Motor#1,#2) Control
- Dynamic Braking – Optional Dynamic Braking Units and Comprehensive offering of Resistors
- PID Controller – Including Sleep and Wake
- Password Protection
- RTD and/or PTC Input Motor Protection
- Parameter Organization similar to GS3 – GS3 Operational (External User PLC) control will work with minimal changes required.
- Calendar function allows a user to program the PLC with ON/OFF control in chronological order, daylight savings time, etc.
- Modularized design eases maintenance and expansion, including quick replacement of fans
- High speed communication interfaces with MODBUS RTU and BACnet protocols built in, with optional communication cards: MODBUS

TCP, EtherNet/IP

- Circuit boards have conformal coating for improved environmental tolerance
- Excellent heat-sink design; able to operate at 50°C ambient temperature
- Fire Mode – Run fire mode during emergencies to have uninterrupted smoke removal and system pressure
- Multi-pump control: fixed quantity, fixed displacement, and fixed time-circulating control; able to control up to 8 pumps (Optional multi-control relay output card is required.)
- Two-year warranty
- CE, TUV, UL, cUL

Accessories

- AC line reactors
- EMI filters
- RF filter
- Braking resistors
- Braking units (for models 20hp and above)
- Fuses
- Conduit boxes
- Flange-Mount Kits
- Replacement cooling fans
- Replacement keypad (and remote-mount bezel kit)
- I/O Option Cards
- EtherNet/IP comm card
- Modbus TCP comm card
- Four and eight-port RS-485 multi-drop termination boards
- GSoft2 drive configuration software
- GSLogic PLC programming software
- USB-485M – USB to RS-485 PC adapter (see "Communications Products" chapter for detailed information)
- Detailed descriptions and specifications for GS accessories are available in the "GS/DURAPulse Accessories" section.

Typical Applications

- Conveyors
- Compressors
- Material handling
- Extruding
- Grinding
- Shop tools
- Fans
- Pumps
- HVAC
- Mixing

DURAPULSE GS4 AC Drives – Selection

Selecting the Proper Drive Rating

Selecting the Proper Drive Rating																
Determine Motor Voltage and Full-Load Amperage (FLA)																
Motor voltage and FLA are located on the nameplate of the motor. NOTE: FLA of motors that have been rewound may be higher than stated.																
Determine Motor Overload Requirements																
Many applications experience temporary overload conditions due to starting requirements or impact loading. Most AC drives are designed to operate at 150% overload for 60 seconds. If the application requires an overload greater than 150% or longer than 60 seconds, the AC drive must be oversized. NOTE: Applications that require replacement of existing motor starters with AC drives may require up to 600% overload.																
Determine Application Type: Constant Torque or Variable Torque																
This torque requirement has a direct effect on which drive to select. Variable Torque applications are generally easier to start; typically fans and pumps. Most other applications outside fans and pumps fall into the Constant Torque category (machine control, conveyors, etc.). If you are unsure of the application, assume Constant Torque. The specification, derating, and selection tables (beginning pg.tGSX-83) are generally segregated by Constant Torque and Variable Torque.																
Installation Altitude																
AC drives rely on air flow for cooling. As the altitude increases, the air becomes less dense, and this drop in air density decreases the cooling properties of the air. Therefore, the AC drive must be oversized to compensate for the decrease in cooling. GS4 drives are designed to operate at 100% capacity at altitudes up to 1000 meters. NOTE: For use above 1000m, the AC drive must be derated as described below.																
Derate Output Current Based on Altitude Above 1000 Meters																
<ul style="list-style-type: none"> • If the AC drive is installed at an altitude of 0–1000m, follow normal operation restrictions. • If installed at an altitude of 1000–3000m, decrease 1% of the rated current or lower 0.5°C of temperature for every 100m increase in altitude. • Maximum altitude for Corner Grounded is 2000m. 																
<p>GS4 Derating for Altitude</p> <p>Rating (%) at Standard Ambient Temperature* T_a at Rating = 100%</p> <table border="1"> <caption>GS4 Derating for Altitude Data</caption> <thead> <tr> <th>Altitude (m)</th> <th>Rating (%)</th> <th>Temperature (°C)</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>100</td> <td>50</td> </tr> <tr> <td>1000</td> <td>100</td> <td>45</td> </tr> <tr> <td>2000</td> <td>90</td> <td>40</td> </tr> <tr> <td>3000</td> <td>80</td> <td>35</td> </tr> </tbody> </table> <p>*Standard Ambient Temperature = 50°C for UL Open Type / IP20 *Standard Ambient Temperature = 40°C for UL Type 1 / IP 20 & UL Open Type / IP20 Side-by-Side</p>		Altitude (m)	Rating (%)	Temperature (°C)	0	100	50	1000	100	45	2000	90	40	3000	80	35
Altitude (m)	Rating (%)	Temperature (°C)														
0	100	50														
1000	100	45														
2000	90	40														
3000	80	35														
(continued next page)																

DURAPULSE GS4 AC Drives – Selection

Selecting the Proper Drive Rating (continued from previous page)

Determine Maximum Enclosure Internal Temperature

AC drives generate a significant amount of heat and can cause the internal temperature of an enclosure to exceed the rating of the GS4 drive, even when the ambient temperature is less than 104°F (40°C). Enclosure ventilation and/or cooling may be required to reduce maximum internal temperature to 104°F (40°C) or less. Ambient temperature measurements/calculations should be made for the maximum expected temperature. When permissible, flange mounting the AC drive (mounting with the drive heatsink in open ambient air) can greatly reduce heating in the enclosure.

NOTE: For use above 104°F (40°C), the AC drive must be derated as described below.


Derate Output Current Based on Temperature Above 104°F (40°C) or 122°F (50°C)

Drive Derating by Temperature and Protection Level

Protection Level *	Derating
UL Type I / IP20	When the GS4 drive is operating at rated current, the ambient temperature has to be between -10°C and +40°C. When ambient temperature exceeds 40°C, decrease the rated current by 2% for every 1°C temperature increase. Maximum allowable temperature is 60°C.
UL Open Type ** / IP00/IP20	When the GS4 drive is operating at rated current, the ambient temperature has to be between -10°C and +50°C. When ambient temperature exceeds 50°C, decrease the rated current by 2% for every 1°C temperature increase. Maximum allowable temperature is 60°C.

* For more information about environmental ratings, refer to the "Operating Temperature and Protection Level" table (pg.tGSX-100).

** Open Type temperature ratings apply to GS4 frame sizes A-C with top covers removed, and frame sizes D0-G without conduit boxes (pg.tGSX-100).

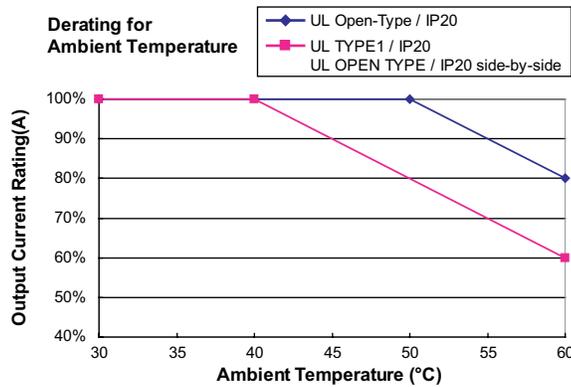

(continued next page)

DURAPULSE GS4 AC Drives – Selection

Selecting the Proper Drive Rating (continued from previous page)	
Derate Output Current Based on Carrier Frequency (if necessary)	
Carrier Frequency Effects	
<p>AC Drives rectify the incoming 50 or 60Hz line power resulting in DC power at 0Hz. The resulting DC power is then pulse-width modulated and supplied to the motor by the drive's power electronics. IGBTs invert the DC power, simulating a sine wave at the desired frequency (that's what allows variable speed in AC induction motors). The speed at which the IGBTs are turned ON and OFF is called Carrier Frequency. In GS4 drives, the Carrier Frequency can range from 2kHz to 15kHz. Though Carrier Frequency can be adjusted, there are trade-offs between High Carrier Frequencies and Low Carrier Frequencies.</p>	
Benefits of Higher Carrier Frequencies:	
<ul style="list-style-type: none"> • Better efficiency (lower harmonic losses) in the motor • Lower audible noise 	
Benefits of Lower Carrier Frequencies:	
<ul style="list-style-type: none"> • Better efficiency in the drive • Lower EMI (electrical noise) • Reduced reflective wave peak voltage <p>As a general rule, the Carrier Frequency should be set as low as possible without creating unacceptable audible noise in the motor. Smaller systems can have higher Carrier Frequencies, but larger drives (>20 or 30hp) should not have Carrier Frequencies set higher than 6kHz. Heavy Duty applications typically run around 2-4 kHz.</p>	
<p>The following Variable Torque (VT) and Constant Torque (CT) derating curves are for drives with 3-phase input power. The 230VAC, CT curves also apply equally whether the drive is supplied with 3-phase or 1-phase input power.</p>	
230V Variable Torque Carrier Frequency Derating	
<p>For 230V Variable Torque 50°C UL Open Type 40°C UL Type 1 or Open Type side-by-side</p>	<p>For 230V Variable Torque 40°C UL Open Type 30°C UL Type 1 or Open Type side-by-side</p>
460V Variable Torque Carrier Frequency Derating	
<p>For 460V Variable Torque 50°C UL Open Type 40°C UL Type 1 or Open Type side-by-side</p>	<p>For 460V Variable Torque 40°C UL Open Type 30°C UL Type 1 or Open Type side-by-side</p>
<i>(continued next page)</i>	

DURAPULSE GS4 AC Drives – Selection

Selecting the Proper Drive Rating (continued from previous page)	
230V Constant Torque Carrier Frequency Derating	
For 230V Constant Torque 50°C UL Open Type 40°C UL Type 1 or Open Type side-by-side	For 230V Constant Torque 40°C UL Open Type 30°C UL Type 1 or Open Type side-by-side
460V Constant Torque Carrier Frequency Derating	
For 460V Constant Torque 50°C UL Open Type 40°C UL Type 1 or Open Type side-by-side	For 460V Constant Torque 40°C UL Open Type 30°C UL Type 1 or Open Type side-by-side

DURAPULSE GS4 AC Drives – Selection Specs

GS4 Drive Model Selection Tables

230V Class GS4 Specifications – Constant & Variable Torque Frame Sizes A, B (1hp–15hp)											
Model Name				GS4-21P0	GS4-22P0	GS4-23P0	GS4-25P0	GS4-27P5	GS4-2010	GS4-2015	
Price				\$525.00	\$578.00	\$653.00	\$739.00	\$835.00	\$932.00	\$1,125.00	
Frame Size				A				B			
Output Rating	Constant Torque (CT)	Max Motor Output (1-phase / 3-phase)	hp	0.5 / 1	0.75 / 2	1 / 3	2 / 5	3 / 7.5	3 / 10	5 / 15	
			kW	0.37 / 0.75	0.55 / 1.5	0.75 / 2.2	1.5 / 3.7	2.2 / 5.5	2.2 / 7.5	3.7 / 11	
		Rated Output Capacity (1-phase / 3-phase)	kVA	1.0 / 1.9	1.3 / 2.8	2.0 / 4.0	3.2 / 6.4	4.4 / 9.6	4.4 / 12	6.8 / 19	
		Rated Output Current (1-phase / 3-phase)	A	2.4 / 4.8	3.2 / 7.1	5 / 10	8 / 16	11 / 24	11 / 31	17 / 47	
		Carrier Frequency	kHz	2 to 6							
	Variable Torque (VT)	Max Motor Output	hp	1	2	3	5	7.5	10	15	
			kW	0.75	1.5	2.2	3.7	5.5	7.5	11	
		Rated Output Capacity	kVA	2.0	3.2	4.4	6.8	10	13	20	
		Rated Output Current	A	5	8	11	17	25	33	49	
		Carrier Frequency	kHz	2 to 15							
Input Rating *	CT	Rated Input Current * (1-phase / 3-phase)	A	6.4 / 6.1	9.7 / 11	15 / 15	20 / 18.5	26 / 26	26 / 34	40 / 50	
	VT		A	6.4	12	16	20	28	36	52	
	Rated Voltage/Frequency		1-phase/3-phase 200–240 VAC (-15% to +10%), 50/60Hz								
	Operating Voltage Range		170–265 VAC								
	Frequency Tolerance		47–63 Hz								
	Short Circuit Withstand (SCCR) (A, rms symmetrical)		100kA								
IE2 Efficiency - Relative Power Loss				3.1%	2.8%	2.5%	2.1%	2.3%	2.1%	2.2%	
Weight (kg [lb])				2.6 [5.7]				5.4 [11.9]			
Watt Loss @ 100% I (W) **				61	88	115	159	264	335	529	
Cooling Method				natural convection	fan						
Dynamic Braking				built in							
DC Choke				optional							
EMI Filter				optional							
<p>* For Use With Three-Phase Motors Only. If 3-phase power source is non-symmetrical, refer to "Circuit Connections – RFI Jumper" in the GS4 AC Drives User Manual, Chapter 2 (www.automationdirect.com). Please refer to "GS4 DURApulse Accessories – Fusing" (pg.tGSX-161) for input fusing information.</p> <p>** Watt loss is reduced if the GS4 drive is flange mounted (frame sizes A through F).</p>											

DURAPULSE GS4 AC Drives – Selection Specifications

230V Class GS4 Specifications – Constant & Variable Torque Frame Sizes C–E (7.5 hp–100hp)											
Model Name				GS4-2020	GS4-2025	GS4-2030	GS4-2040	GS4-2050	GS4-2060	GS4-2075	GS4-2100
Price				\$1,586.00	\$1,723.00	\$1,953.00	\$3,449.00	\$3,961.00	\$5,282.00	\$5,932.00	\$6,913.00
Frame Size				C			D		E		
Output Rating	Constant Torque (CT)	Max Motor Output (1-phase / 3-phase)	hp	7.5/20	10/25	10/30	10/40	10/50	15/60	20/75	25/100
			kW	5.5/15	7.5/18.5	7.5/22	7.5/30	7.5/37	11/45	15/55	18.5/75
		Rated Output Capacity (1-phase / 3-phase)	kVA	10/25	13/28	13/34	13/45	13/55	20/68	26/81	30/96
		Rated Output Current (1-phase / 3-phase)	A	25/62	33/71	33/86	33/114	33/139	49/171	65/204	75/242
		Carrier Frequency	kHz	2 to 6							
	Variable Torque (VT)	Max Motor Output	hp	20	25	30	40	50	60	75	100
			kW	15	18.5	22	30	37	45	55	75
		Rated Output Capacity	kVA	26	30	36	48	58	72	86	102
		Rated Output Current	A	65	75	90	120	146	180	215	255
		Carrier Frequency	kHz	2 to 10			2 to 6				
Input Rating *	CT	Rated Input Current * (1-phase / 3-phase)	A	58/68	76/78	76/95	63/118	63/136	94/162	124/196	143/233
	VT		A	72	83	99	124	143	171	206	245
	Rated Voltage/Frequency		1-phase/3-phase 200–240 VAC (-15% to +10%), 50/60Hz								
	Operating Voltage Range		170–265 VAC								
	Frequency Tolerance		47–63 Hz								
	Short Circuit Withstand (SCCR) (A, rms symmetrical)		100kA								
IE2 Efficiency - Relative Power Loss				2.3%	2.4%	2.3%	1.9%	2.1%	1.9%	1.9%	2.7%
Weight (kg [lb])				9.8 [21.6]			38.5 [84.9]		64.8 [143]		
Watt Loss @ 100% I (W) **				616	733	865	1099	1311	1518	1709	2139
Cooling Method				fan							
Dynamic Braking				built in			optional Dynamic Braking Unit (DBU)				
DC Choke				optional			built in				
EMI Filter				optional							

* For Use With Three-Phase Motors Only. If 3-phase power source is non-symmetrical, refer to "Circuit Connections – RFI Jumper" in the GS4 AC Drives User Manual, Chapter 2 (www.automationdirect.com). Please refer to "GS4 DURApulse Accessories – Fusing" (pg.tGSX-161) for input fusing information.

** Watt loss is reduced if the GS4 drive is flange mounted (frame sizes A through F).

DURAPULSE GS4 AC Drives – Selection Specifications

460V Class GS4 Specifications – Constant & Variable Torque Frame Sizes A, B (1hp–20hp)												
Model Name				GS4-41P0	GS4-42P0	GS4-43P0	GS4-45P0	GS4-47P5	GS4-40T0	GS4-40T5	GS4-40T0	
Price				\$535.00	\$578.00	\$643.00	\$750.00	\$835.00	\$920.00	\$1,095.00	\$1,388.00	
Frame Size				A					B			
Output Rating	Constant Torque (CT)	Max Motor Output	hp	1	2	3	5	7.5	10	15	20	
			kW	0.75	1.5	2.2	3.7	5.5	7.5	11	15	
		Rated Output Capacity	kVA	2.3	3.0	4.5	6.5	8.8	14	18	24	
		Rated Output Current	A	2.9	3.8	5.7	8.1	11	17	23	30	
		Carrier Frequency	kHz	2 to 6								
	Variable Torque (VT)	Max Motor Output	hp	1	2	3	5	7.5	10	15	20	
			kW	0.75	1.5	2.2	3.7	5.5	7.5	11	15	
		Rated Output Capacity	kVA	2.4	3.2	4.8	7.2	9.6	14	19	25	
Rated Output Current		A	3	4	6	9	12	18	24	32		
	Carrier Frequency	kHz	2 to 15									
Input Rating *	CT	Rated Input Current	A	4.1	5.6	8.3	13	16	19	25	33	
	VT		A	4.3	5.9	8.7	14	17	20	26	35	
	Rated Voltage/Frequency		3-phase 380–480 VAC (-15% to +10%), 50/60Hz									
	Operating Voltage Range		323–528 VAC									
	Frequency Tolerance		47–63 Hz									
	Short Circuit Withstand (SCCR) (A, rms symmetrical)		100kA									
IE2 Efficiency - Relative Power Loss				2.6%	2.3%	2.2%	2.0%	1.9%	2.1%	2.0%	1.8%	
Weight (kg [lb])				2.6 [5.7]					5.4 [11.9]			
Watt Loss @ 100% I (W) **				59	74	104	141	180	292	380	518	
Cooling Method				natural convection		fan						
Dynamic Braking				built in								
DC Choke				optional								
EMI Filter				optional								
<p>* For Use With Three-Phase Motors Only. If 3-phase power source is non-symmetrical, refer to "Circuit Connections – RFI Jumper" in the GS4 AC Drives User Manual, Chapter 2 (www.automationdirect.com). Please refer to "GS4 DURApulse Accessories – Fusing" (pg.tGSX-161) for input fusing information. ** Watt loss is reduced if the GS4 drive is flange mounted (frame sizes A through F).</p>												

DURAPULSE GS4 AC Drives – Selection Specifications

460V Class GS4 Specifications – Constant & Variable Torque Frame Sizes C, D0, D (25hp–100hp)										
Model Name				GS4-4025	GS4-4030	GS4-4040	GS4-4050	GS4-4060	GS4-4075	GS4-4100
Price				\$1,674.00	\$1,914.00	\$2,406.00	\$2,907.00	\$3,400.00	\$3,942.00	\$5,400.00
Frame Size				C			D0		D	
Output Rating	Constant Torque (CT)	Max Motor Output	hp	25	30	40	50	60	75	100
			kW	18.5	22	30	37	45	55	75
		Rated Output Capacity	kVA	29	34	45	55	69	84	114
		Rated Output Current	A	36	43	57	69	86	105	143
		Carrier Frequency	kHz	2 to 6						
	Variable Torque (VT)	Max Motor Output	hp	25	30	40	50	60	75	100
			kW	18.5	22	30	37	45	55	75
		Rated Output Capacity	kVA	30	36	48	58	73	88	120
Rated Output Current		A	38	45	60	73	91	110	150	
	Carrier Frequency	kHz	2 to 10							
Input Rating *	CT	Rated Input Current	A	38	45	60	70	96	108	149
	VT		A	40	47	63	74	101	114	157
	Rated Voltage/Frequency			3-phase 380–480 VAC (-15% to +10%), 50/60Hz						
	Operating Voltage Range			323–528 VAC						
	Frequency Tolerance			47–63 Hz						
	Short Circuit Withstand (SCCR) (A, rms symmetrical)			100kA						
IE2 Efficiency - Relative Power Loss				1.6%	1.6%	1.6%	1.6%	1.6%	1.4%	1.3%
Weight (kg [lb])				9.8 [21.6]			27.0 [59.5]		38.5 [84.9]	
Watt Loss @ 100% I (W) **				507	635	866	993	1147	1413	1742
Cooling Method				fan						
Dynamic Braking				built in			optional Dynamic Braking Unit (DBU)			
DC Choke				optional			built in			
EMI Filter				optional						
<p>* For Use With Three-Phase Motors Only. If 3-phase power source is non-symmetrical, refer to "Circuit Connections – RFI Jumper" in the GS4 AC Drives User Manual, Chapter 2 (www.automationdirect.com). Please refer to "GS4 DURApulse Accessories – Fusing" (pg.tGSX-161) for input fusing information. ** Watt loss is reduced if the GS4 drive is flange mounted (frame sizes A through F).</p>										

DURAPULSE GS4 AC Drives – Selection Specifications

460V Class GS4 Specifications – Constant & Variable Torque Frame Sizes E, F, G (125hp–300hp)										
Model Name				GS4-4125	GS4-4150	GS4-4175	GS4-4200	GS4-4250	GS4-4300	
Price				\$7,389.00	\$8,315.00	\$9,902.00	\$11,338.00	\$15,529.00	\$18,129.00	
Frame Size				E			F		G	
Output Rating	Constant Torque (CT)	Max Motor Output	hp	125	150	175	215	250	300	
			kW	90	110	132	160	185	220	
		Rated Output Capacity	kVA	136	167	197	235	280	348	
		Rated Output Current	A	171	209	247	295	352	437	
		Carrier Frequency	kHz	2 to 6						
	Variable Torque (VT)	Max Motor Output	hp	125	150	175	215	250	300	
			kW	90	110	132	160	185	220	
		Rated Output Capacity	kVA	143	175	207	247	295	367	
		Rated Output Current	A	180	220	260	310	370	460	
		Carrier Frequency	kHz	2 to 9						
Input Rating *	CT	Rated Input Current	A	159	197	228	285	361	380	
	VT		A	167	207	240	300	380	400	
	Rated Voltage/Frequency		3-phase 380–480 VAC (-15% to +10%), 50/60Hz							
	Operating Voltage Range		323–528 VAC							
	Frequency Tolerance		47–63 Hz							
	Short Circuit Withstand (SCCR) (A, rms symmetrical)		100kA							
IE2 Efficiency - Relative Power Loss				1.2%	1.2%	1.3%	1.3%	1.4%	1.5%	
Weight (kg [lb])				64.8 [143]			86.5 [191]		134 [295]	
Watt Loss @ 100% I (W) **				2092	2599	3081	3783	4589	5772	
Cooling Method				fan						
Dynamic Braking				optional						
DC Choke				built in						
EMI Filter				optional						
<p>* For Use With Three-Phase Motors Only. If 3-phase power source is non-symmetrical, refer to "Circuit Connections – RFI Jumper" in the GS4 AC Drives User Manual, Chapter 2 (www.automationdirect.com). Please refer to "GS4 DURApulse Accessories – Fusing" (pg.tGSX-161) for input fusing information. ** Watt loss is reduced if the GS4 drive is flange mounted (frame sizes A through F; frame G is not capable of flange mounting).</p>										

DURAPULSE GS4 AC Drives – General Specifications

GS4 General Specifications (Applicable to All Models)		
Control Characteristics	Control Method	1: V/F (V/Hz control); 2: SVC (sensorless vector control)
	Starting Torque	Up to 120% Variable Torque (VT) or 150% Constant Torque (CT) for one minute
	V/F Curve	4 point adjustable V/Hz curve and square curve
	Speed Response Ability	5Hz
	Torque Limit	VT: 170% output current CT: 180% output current
	Torque Accuracy	±5%
	Max Output Frequency (Hz)	230V series: 599.00 Hz (75hp & above: 400.00 Hz) 460V series: 599.00 Hz (125hp & above: 400.00 Hz)
	Output Frequency Accuracy	Digital command: ±0.01%, -10°C to +40°C Analog command: ±0.1%, 25±10°C
	Output Frequency Resolution	Digital command: 0.01Hz Analog command: (0.03) x (max output frequency) / 60Hz [±11 bit]
	Overload Tolerance	VT duty: rated output current is 120% for 60 seconds CT duty: rated output current is 150% for 60 seconds
	Frequency Setting Signal	+10V to -10V, 0 to 10V, 4–20mA, 0–20mA
	Accel/Decel Time	0.00–600.00 / 0.0–6000.0 seconds
	Main Control Function	Fault restart; Parameter copy; Dwell; BACnet communication; Momentary power loss ride-through; Speed search; Over-torque detection; Torque limit; 16-step speed (max); Accel/Decel time switch; S-curve accel/decel; 3-wire sequence; Auto-Tuning (rotational, stationary); Frequency upper/lower limit settings; Cooling fan on/off switch; Slip compensation; Torque compensation; JOG frequency; MODBUS communication (RS-485 RJ45, max 115.2 kbps); DC injection braking at start/stop; Smart stall; PID control (with sleep function); Energy saving control; Optional ModbusTCP or EtherNet/IP communication/control
Fan Control	230V model GS4-2020 and above: PMW control 230V model GS4-2015 and below: ON/OFF switch control 460V model GS4-4025 and above: PMW control 460V model GS4-4020 and below: ON/OFF switch control	
Protection Characteristics	Motor Protection	Electronic thermal relay protection
	Over-current Protection	For drive model 230V and 460V: Over-current protection for 240% rated current Current clamp: VT duty 170–175%; CT duty 180–185%
	Over-voltage Protection	230V: drive will stop when DC-BUS voltage exceeds 410V 460V: drive will stop when DC-BUS voltage exceeds 820V
	Over-temperature Protection	Built-in temperature sensor
	Stall Prevention	Independent stall prevention during acceleration, deceleration, and running
	Restart After Instantaneous Power Failure	Up to 20 seconds (parameter settable)
	Ground Leakage Current Protection	Leakage current is higher than 50% of rated current of the AC motor drive
	Hi-Pot Test	UL508C; EN 61800-5-1
Conformal Coating	IEC-60721-3-3	
Agency Approvals	CE, Reach, RoHS, TUV, cULus; (Accessories are CE; Agency approvals other than CE do not apply to accessory conduit box kits, fan kits, flange mount kits, and braking resistors.) <i>To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.</i>	

DURAPULSE GS4 AC Drives – Optional GS4-Specific Internal Accessories List

Accessories Available for GS4 AC Drives Only

GS4 AC Drives Software and Accessories Internal or Attached to GS4 Drive																	
Model Number	Frame Size	GS4 Drive Software	GS4 PLC Software	Drive Keypad*	Keypad Mounting Bezel	I/O Modules	Communication Modules	Conduit Boxes	Cooling Fans*	Flange Mount Kits							
		pg.tGSX-93	pg.tGSX-94	pg.tGSX-95	pg.tGSX-95	pg.tGSX-91	pg.tGSX-92	pg.tGSX-98	230V pg.tGSX-96 460V pg.tGSX-97	pg.tGSX-99							
GS4-21P0	A							n/a	n/a	GS4-FMKIT-A							
GS4-22P0								n/a	GS4-FAN-AM	GS4-FMKIT-1							
GS4-23P0										GS4-FMKIT-A							
GS4-25P0																	
GS4-27P5	B							n/a	GS4-FAN-BM1 GS4-FAN-BB	GS4-FMKIT-B							
GS4-2010									GS4-FAN-BM2 GS4-FAN-BB								
GS4-2015																	
GS4-2020	C							n/a	GS4-FAN-CM GS4-FAN-CB1	GS4-FMKIT-C							
GS4-2025																	
GS4-2030	D**							GS4-CBX-D	GS4-FAN-DM GS4-FAN-DB	n/a							
GS4-2040																	
GS4-2050																	
GS4-2060	E**							GS4-CBX-E	GS4-FAN-EM1 GS4-FAN-EB	n/a							
GS4-2075									GS4-FAN-EM2 GS4-FAN-EB								
GS4-2100	A	GSOFT2	GSLOGIC	GS4-KPD	GS4-BZL	GS4-06CDD GS4-06NA GS4-06TR	GS4-CM-ENETIP GS4-CM-MODTCP	n/a	n/a	GS4-FMKIT-A							
GS4-41P0																GS4-FMKIT-1	
GS4-42P0																GS4-FAN-AM	GS4-FMKIT-A
GS4-43P0																	
GS4-45P0																	
GS4-47P5																	
GS4-4010	B							n/a	GS4-FAN-BM1 GS4-FAN-BB	GS4-FMKIT-B							
GS4-4015									GS4-FAN-BM2 GS4-FAN-BB								
GS4-4020																	
GS4-4025	C							n/a	GS4-FAN-CM GS4-FAN-CB2	GS4-FMKIT-C							
GS4-4030																	
GS4-4040	D0**							GS4-CBX-D0	GS4-FAN-D0M GS4-FAN-DB	n/a							
GS4-4050																	
GS4-4060																	
GS4-4075	D**							GS4-CBX-D	GS4-FAN-DM GS4-FAN-DB	n/a							
GS4-4100																	
GS4-4125	E**							GS4-CBX-E	GS4-FAN-EM2 GS4-FAN-DB	n/a							
GS4-4150																	
GS4-4175	F**							GS4-CBX-F	GS4-FAN-FM GS4-FAN-FB	n/a							
GS4-4200																	
GS4-4250	G							GS4-CBX-G	GS4-FAN-GM	n/a							
GS4-4300																	

* Keypads and Cooling Fans are pre-installed and included with the GS4 Drives. They are field-replaceable and available for purchase separately as spare or replacement parts.
** GS4 drives in D0, D, E and F frames can be flanged mounted and do not require a flange mount kit.

 Note: Refer to the page numbers shown above for more complete information about the accessory products.

DURAPULSE GS4 AC Drives – Optional External Accessories List

Accessories Available for GS4 AC Drives

GS4 AC Drives Accessories External or Remote from GS4 Drive								
Model Number	Frame Size	Braking Units		Braking Resistors		Reactors	EMI Filters	Fusing
		Quantity	pg.tGSX-138	Quantity	pg.tGSX-138	pg.tGSX-119	pg.tGSX-154	pg.tGSX-161
GS4-21P0	A	n/a		1	GS-BR-080W200		KMF325A	
GS4-22P0			1	GS-BR-200W091				
GS4-23P0			1	GS-BR-300W070				
GS4-25P0			1	GS-BR-400W040				
GS4-27P5	B	n/a		1	GS-BR-1K0W020		KMF370A	
GS4-2010			1	GS-BR-1K0W020				
GS4-2015			1	GS-BR-1K5W013				
GS4-2020	C	n/a		2	GS-BR-1K0W4P3		KMF3100A	
GS4-2025			2	GS-BR-1K0W4P3				
GS4-2030			2	GS-BR-1K5W3P3				
GS4-2040	D	2	GS-1DBU	4	GS-BR-1K0W5P1		MIF3150	
GS4-2050		2	GS-2DBU	4	GS-BR-1K2W3P9			
GS4-2060	E	2	GS-2DBU	4	GS-BR-1K5W3P3		MIF3400B	
GS4-2075		3	GS-2DBU	6	GS-BR-1K2W3P9			
GS4-2100		4	GS-2DBU	8	GS-BR-1K2W3P9			
GS4-41P0	A	n/a		1	GS-BR-080W750	Refer to Reactors Specification pages due to multiple factors of variability	KMF318A	Refer to Fusing Specification pages due to multiple factors of variability
GS4-42P0			1	GS-BR-200W360				
GS4-43P0			1	GS-BR-300W250				
GS4-45P0			1	GS-BR-400W150				
GS4-47P5			1	GS-BR-1K0W075				
GS4-4010	B	n/a		1	GS-BR-1K0W075		KMF350A	
GS4-4015			1	GS-BR-1K5W043				
GS4-4020			2	GS-BR-1K0W016				
GS4-4025	C	n/a		2	GS-BR-1K0W016		KMF370A	
GS4-4030			2	GS-BR-1K5W013				
GS4-4040			4	GS-BR-1K0W016				
GS4-4050			1	GS-4DBU	4			
GS4-4060	DO	1	GS-4DBU	4	GS-BR-1K5W013		MIF3150	
GS4-4075	D	2	GS-3DBU	8	GS-BR-1K0W5P1		MIF3150	
GS4-4100		2	GS-4DBU	8	GS-BR-1K2W015		MIF3150	
GS4-4125	E	2	GS-4DBU	8	GS-BR-1K5W013		MIF3400B	
GS4-4150		1	GS-5DBU	10	GS-BR-1K2W015		MIF3400B	
GS4-4175	F	1	GS-6DBU	12	GS-BR-1K5W012		MIF3400B	
GS4-4200		1	GS-6DBU	12	GS-BR-1K5W012		MIF3400B	
GS4-4250	G	1	GS-7DBU	14	GS-BR-1K5W012		MIF3800 + (3) TOR254	
GS4-4300		2	GS-5DBU	20	GS-BR-1K2W015		MIF3800 + (3) TOR254	



WARNING: REFER TO THE PAGE NUMBERS SHOWN ABOVE FOR INFORMATION ABOUT THE PRODUCT SPECIFICATIONS AND THE CONDITIONS UNDER WHICH THE PRODUCT SELECTIONS ARE APPLICABLE.

GS4-Specific Optional Accessories – Input/Output Expansion Cards

Accessories Applicable Only to GS4 AC Drives


Please refer to the "GS/DURApulse AC Drives – Accessories" section for accessories applicable to multiple families of GS/DURApulse AC Drives, including GS4.

Input/Output Expansion Cards

Optional I/O cards allow additional inputs and outputs to be added to the GS4 internal I/O. (Only one I/O card can be installed at a time.)

GS4 DURAPULSE Drives Input/Output Expansion Cards							
Part Number	Price	Description	Terminals	Specifications	Wire Size	Placement*	GS Drive
GS4-06CDD*	\$33.50	DURAPULSE combination discrete I/O module, selectable sinking or sourcing 24VDC input, 24VDC output, 4-point input, 2-point output, 1 input common(s), 1 output common(s), 50mA resistive output current.	COM	(1) Common for Input Terminals	20~24 AWG	slot #3	GS4 – all
			DI10–DI13	(4) Discrete Inputs; selectable sinking or sourcing Internal power available: 24VDC ±5% 200mA, 5W External power: 24VDC (30V max, 19V min), 30W ON: activation 6.5mA @ ≥ 9VDC OFF: leakage 10µA ≤ 3VDC			
			DO10–DO11	(2) Discrete Outputs (photocoupler) Duty-cycle: 50% Max. output frequency: 100Hz Max. current: 50mA resistive Max. voltage: 48VDC			
			DOC	(1) Common for Output Terminals			
GS4-06NA*	\$36.00	DURAPULSE discrete input module, sinking 120VAC input, 6-point input, 1 input common(s).	ACN	(1) AC power common for Input Terminal (Neutral)	20~24 AWG	slot #3	GS4 – all
			DI10–DI15	(6) Discrete Inputs; sinking Input voltage: 100–130 VAC Input frequency: 47–63 Hz Input impedance: 27kΩ Terminal response time: ON: 10ms OFF: 20ms			
GS4-06TR*	\$55.00	DURAPULSE relay output module, Form A (SPST-NO) relays, 6-point output, 6 output common(s), 3 Amps resistive output current, 1.2 Amps inductive output current, 250VAC/30VDC input.	R10–R15	(6) separate commons for each relay	20~26 AWG	slot #3	GS4 – all
			RO10–RO15	(6) normally open relay output Resistive load: 5A(NO) / 250VAC 5A(NO) / 30VDC Inductive load (COSØ 0.4) 2A(NO) / 250VAC			

* GS4 AC drives have three option card slots; each slot will hold only one option card designed for that particular slot. I/O cards are designed for slot #3, and will not fit in any other slot.

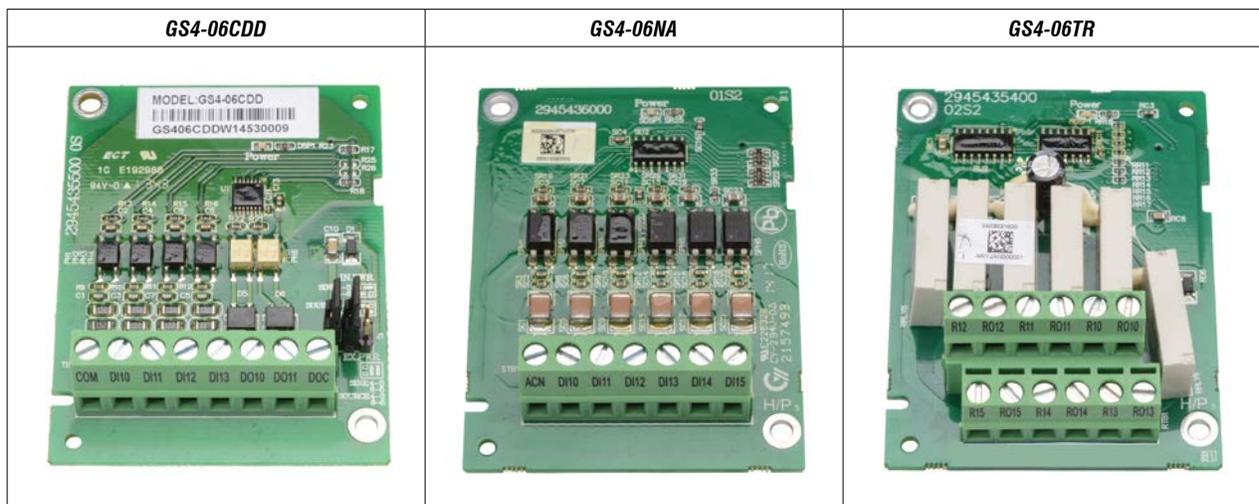

GS4-Specific Optional Accessories – Communication Interface Cards

Accessories Applicable Only to GS4 AC Drives


Please refer to the "GS/DURApulse AC Drives – Accessories" section for accessories applicable to multiple families of GS/DURApulse AC Drives, including GS4.

Communication Cards

Communication interface cards provide EtherNet/IP™ or ModbusTCP communication capability. Only one communication card can be installed at a time.

GS4 DURAPULSE Drives Communication Interface Cards					
Part Number	Price	Description	Specifications	Placement*	GS Drive
GS4-CM-ENETIP*	\$110.00	DURAPULSE communication card, EtherNet/IP	Interface: EtherNet/IP RJ45 with MDI/MDIX auto-detect Number of ports: 1 (16 connections max) Transmission method: IEEE 802.3, IEEE 802.3u Transmission cable: Category 5e shielding 100MHz Transmission speed: 10/100 Mbps Auto-Detect Network protocol: ICMP, IP, TCP, UDP, DHCP, Modbus TCP, EtherNet/IP Power supply voltage: 5VDC (supplied by the GS4 AC drive) Insulation voltage: 500VDC Power consumption: 0.8W Weight: 25g Noise immunity ESD (IEC 61800-5-1, IEC 61000-4-2) EFT (IEC 61800-5-1, IEC 61000-4-4) Surge Test (IEC 61800-5-1, IEC 61000-4-5) Conducted Susceptibility Test (IEC 61800-5-1, IEC 61000-4-6) Operation: -10°C to +50°C [14°F to 122°F] (temperature), 90% (humidity) Storage: -25°C to +70°C [-13°F to +158°F] (temperature), 95% (humidity) Vibration / Shock immunity: IEC 61800-5-1, IEC 60068-2-6/IEC 61800-5-1, IEC 60068-2-27 Ethernet timeout functionality for EtherNet/IP connections GS4-CM-ENETIP supports 4 EtherNet/IP connections and also supports 4 ModTCP connections. These ModTCP connections cannot start/stop or change command frequency in the drive, but can be used to monitor the drive and change Parameters. Ethernet timeout functionality <u>for ModTCP connections</u> is <u>not</u> supported on the EtherNet/IP card.	slot #1	GS4 – all
GS4-CM-MODTCP*	\$97.00	DURAPULSE communication card, ModbusTCP	Interface: Ethernet RJ45 with MDI/MDIX auto-detect Number of ports: 1 (4 connections max) Transmission method: IEEE 802.3, IEEE 802.3u Transmission cable: Category 5e shielding 100MHz Transmission speed: 10/100 Mbps Auto-Detect Network protocol: ICMP, IP, TCP, UDP, DHCP, Modbus TCP Power supply voltage: 5VDC (supplied by the GS4 AC drive) Insulation voltage: 500VDC Power consumption: 0.8W Weight: 25g Noise immunity ESD (IEC 61800-5-1, IEC 61000-4-2) EFT (IEC 61800-5-1, IEC 61000-4-4) Surge Test (IEC 61800-5-1, IEC 61000-4-5) Conducted Susceptibility Test (IEC 61800-5-1, IEC 61000-4-6) Operation: -10°C to +50°C [14°F to 122°F] (temperature), 90% (humidity) Storage: -25°C to +70°C [-13°F to +158°F] (temperature), 95% (humidity) Vibration / Shock immunity: IEC 61800-5-1, IEC 60068-2-6/IEC 61800-5-1, IEC 60068-2-27 Ethernet Timeout functionality for ModTCP connections	slot #1	GS4 – all

* GS4 AC drives have three option card slots; each slot will hold only one option card designed for that particular slot. Communication interface cards are designed for slot #1, and will not fit in any other slot.

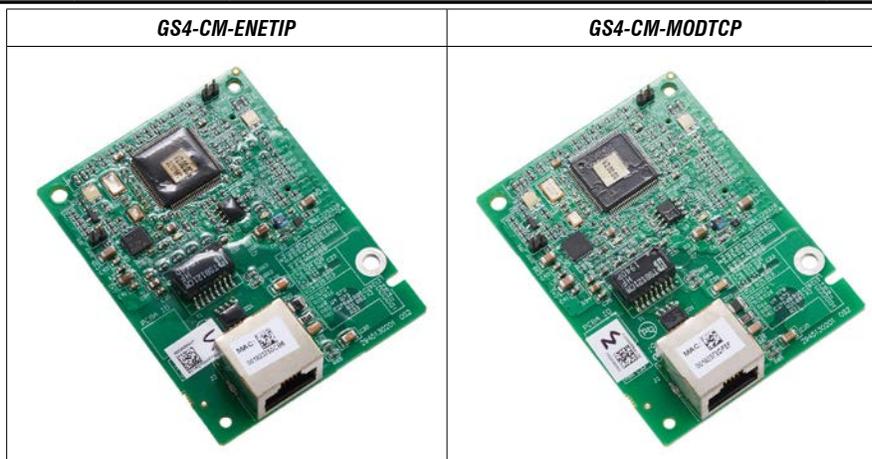

GS4/GS10/GS20(X) Accessories – Software

GSoft2 Drive Configuration Software

Optional Accessory Software Applicable Only to AC Drive Series:

- GS4
- GS10
- GS20(X)

GSoft2 Drive Configuration Software – Available for *FREE* Download

GS20(X) DURAPULSE Drives GSOFT2 Drive Configuration Software			
Part Number	Price*	Description	For GS Drive
GSOFT2	\$10.50	Drive Configuration Software for GS4 and GS20(X) AC drives	GS4 – all GS10 – all GS20(X) – all
USB-485M	\$60.00	PC adapter, USB A to RS-485 (RJ45/RJ12).	GS4/GS10
USB-CBL-AB3	\$12.00	Programming cable, USB A to USB B, 3ft cable length.	GS4 – all (for Drive FW only) GS20(X)
* GSOFT2 can be downloaded for <u>free</u> or purchased on USB from AutomationDirect.com (search for GSOFT2).			

GSOFT2 Drive Configuration Software

GSoft2 is the configuration software for the Automation Direct GS4 and GS10/GS20(X) family of drives. It is designed to allow you to connect a personal computer to the drive, and perform a variety of functions.

GSoft2 includes an integral help file with software instructions. GSoft2 can be downloaded for free or purchased on USB from AutomationDirect.com (search for GSoft2).

Functions

- Create new drive configurations
- Upload/download drive configurations
- Edit drive configurations
- Archive/store multiple drive configurations on your PC
- Trend drive operation parameters (not available with GS10)
- Tune the drive PID loop
- View real time key operating parameters
- Start/Stop drive and switch directions, provided drive is set up for remote operation
- View drive faults

Computer System Requirements

GSoft2 will run on PCs that meet the following requirements:

- Windows OS: **7**: 32 & 64 bit, **8**: 32 & 64 bit, **8.1**: 32 & 64 bit, **10**: 64 bit, 11
- Internet Explorer 9.0 or higher (for HTML help support)
- 32 Mb of available memory
- 10 Mb hard drive space
- Available USB port



GS4/GS20(X) Accessories – Software

GSLogic PLC Programming Software

Optional Accessory Software Applicable Only to AC Drive Series:

- GS4
- GS20(X)

GSLOGIC Drive Configuration Software – Available for *FREE* Download

GS20(X) DURAPULSE Drives GSLogic PLC Programming Software			
Part Number	Price*	Description	For GS Drive
GSLOGIC	\$10.50	Windows PLC Logic Software for GS4 and GS20(X) AC drives	GS4 - all GS20(X) – all
USB-485M	\$60.00	PC adapter, USB A to RS-485 (RJ45/RJ12).	GS4
USB-CBL-AB3	\$12.00	Programming cable, USB A to USB B, 3ft cable length.	GS20(X)

* GSLOGIC can be downloaded for free or purchased on USB from AutomationDirect.com (search for GSLOGIC).

PLC Summary

The GS4 and GS20(X) drives include a built-in PLC. Programmed in ladder logic, the PLC provides a comprehensive set of instructions and 2,000 (GS20(X)) or 10,000 (GS4) steps of programming capacity. GSLogic PLC software includes a Help File which contains the detailed information needed to use the PLC.

The PLC functionality is included with every GS4 and GS20(X) drive, and can be accessed over communications by external PLCs (over serial Modbus), or by the drive (using built-in PLC instructions). The PLC is perfectly suited for applications where digital and analog I/O requirements are small. For applications with complex PLC programming or large I/O requirements, please consider Click, Productivity, or Do-More/BRX. All of these PLCs can be easily integrated with the GS drive family or PLC. The GS4-KPD keypad is capable of storing multiple PLC programs.

There are two methods for communicating from the PLC to the drive. The first method is to use the WPR and RPR instructions available in the PLC's library. These two instructions can read from or write to any AC drive parameter in the same physical drive. The second method is to use Modbus RTU. The PLC is a Serial Modbus slave only. A Modbus RTU master can communicate with the PLC via serial only; optional communication cards cannot address the PLC. If communication cards (EtherNet/IP or Modbus TCP) are the desired method of communication, the drive includes PLC Buffers parameters that can be used. Simply write the needed information from the PLC into the drive's PLC buffer parameters using the WPR instruction. The Modbus TCP or EtherNet/IP cards can then read the VFD parameters.

GSLogic Introduction

GSLogic is the drive PLC programming software for the AutomationDirect GS4 and GS20(X) family of drives. It is designed to enable you to perform a variety of drive PLC programming functions. Windows editing functions like cut, copy, paste, multiple windows, etc., are supported. GSLogic also provides for register editing, settings, file reading, saving, online monitoring settings, and other convenience functions, such as:

- Upload/download drive PLC program files to the onboard PLC
- Create new drive PLC programs
- Edit drive PLC programs
- Archive/store multiple drive PLC programs on your PC or the GS4-KPD

drive keypad


- Control drive PID loops (FPID instructions)
- View in real time all drive PLC registers
- Print drive PLC program files

GSLogic includes an integral help file that includes software instructions, how to use GSLogic, and how to use the GS drive PLC.

GSLogic System Requirements

GSLogic is a Windows-based programming software environment. Please check the following requirements when choosing your PC configuration:

- Windows OS: **Z**: 32 & 64 bit, **8**: 32 & 64 bit, **8.1**: 32 & 64 bit, **10**: 64 bit
- SVGA 1024x768 pixels resolution (1280x1024 pixels resolution recommended)
- 300MB free hard-disk space
- RAM: Windows 7 & higher with GUI version 2.0.0.x or higher; RAM = 2GB memory (4GB recommended) with GUI version 1.1.0 or lower; RAM = 512MB free RAM (1GB recommended)
- USB Port required for project transfer to drive
- USB-485M serial adapter required (GS4 only)

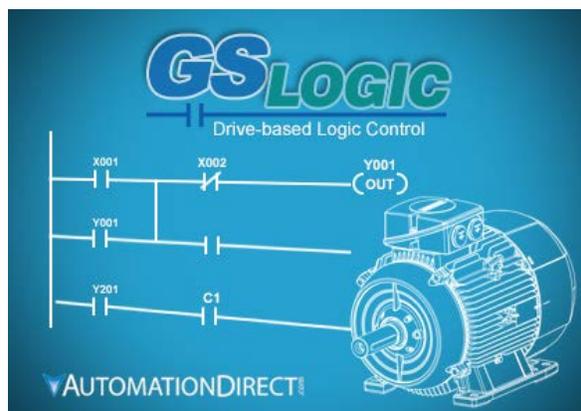

GS4/GS10/GS20(X) Optional Accessories – External Keypad Mounting Kit / Spare Keypad

Accessories Applicable Only to GS4, GS10, and GS20(X) AC Drives

Please refer to the "GS/DURApulse AC Drives – Accessories" section for accessories applicable to multiple families of GS/DURApulse AC Drives,

Keypad (Spare/Replacement)

NOTE: The keypad described below is included with the GS4 AC Drive, and is also available for purchase separately as a spare/replacement component for GS4, or an optional upgrade for GS10/GS20(X).


Keypad Panel-Mounting Kit

NOTE: The keypad panel-mounting kit described below is an optional accessory that is NOT included with the GS10/GS20(X) AC drive.



GSx Series DURAPULSE Drives Keypad and Keypad Panel-Mounting Kit			
Part Number	Price	Description	For GS Drive
GS4-KPD*	\$107.00	Spare or replacement keypad for GS4 AC drives; optional advanced keypad for GS20(X) drives; includes RJ45 connector; great for maintenance or back-up programs.	GS4 – all GS10 – all GS20(X) – all
GS4-BZL**	\$29.50	Keypad Panel-Mounting Kit for remote surface mounting or embedded mounting of the AC drive removable keypad; hardware included. Use a standard Cat5e RJ45 patch cable (not included) to connect a remote-mounted keypad to the drive. Max cable length for remote-mounted keypad = 5m.	GS4 – all GS10 – all GS20(X) – all

* A keypad is included with each GS4 AC Drive; additional keypads are available for spare/replacement components.
 ** The keypad mounting kit is an optional accessory that is NOT included with the GS4 AC drive; for mounting the keypad remotely from the drive.
 Note: Keypad firmware can only be upgraded when connected to a GS4 drive.

GS4-KPD

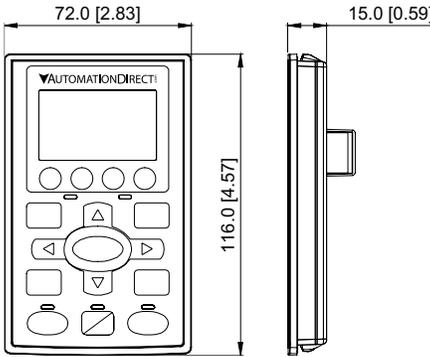	RJ45 Connector	Dimensions (mm [in])
		

GS4-BZL

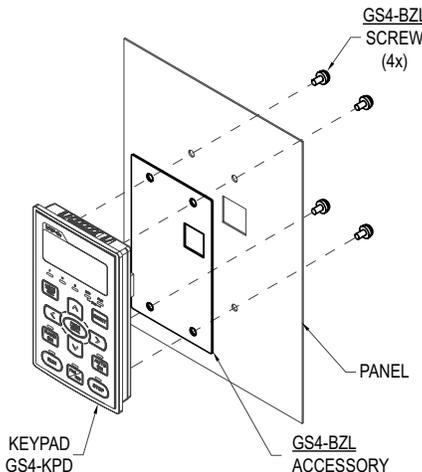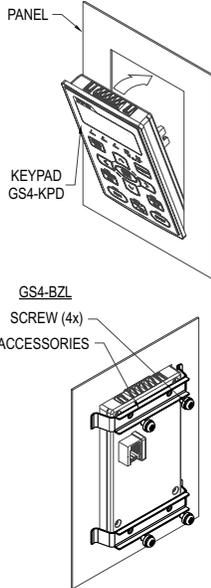	Wall Mounting	Embedded Mounting
		

GS4-Specific Optional Accessories – Spare/Replacement Cooling Fans

Accessories Applicable Only to GS4 AC Drives

Please refer to the "GS/DURApulse AC Drives – Accessories" section for accessories applicable to multiple families of GS/DURApulse AC Drives, including GS4.

Cooling Fans for 230V GS4 Drives (Spare/Replacement)

NOTE: The fans described below are included with the applicable GS4 AC Drive, and are also available for purchase separately as spare/replacement components.

GS4 230V Models – (GS4-2xxx) – Fan Selection Table								
Drive Model	Fan Model *			Description	Size	Voltage	Amps / Fan	Fans / Kit
	Part #	Price	Photo					
GS4-22P0 GS4-23P0 GS4-25P0	<u>GS4-FAN-AM</u>	\$28.00		Frame A main	40mm	24	0.15	1
GS4-27P5	<u>GS4-FAN-BM1</u>	\$34.50		Frame B main	80mm	24	0.33	1
	<u>GS4-FAN-BB</u>	\$27.00		Frame B board level	40mm	24	0.18	1
GS4-2010 GS4-2015	<u>GS4-FAN-BM2</u>	\$52.00		Frame B main	80mm	24	0.51	1
	<u>GS4-FAN-BB</u>	\$27.00		Frame B board level	40mm	24	0.18	1
GS4-2020 GS4-2025 GS4-2030	<u>GS4-FAN-CM</u>	\$49.00		Frame C main	92mm	24	0.75	1
	<u>GS4-FAN-CB1</u>	\$28.00		Frame C board level	40mm	24	0.18	1
GS4-2040 GS4-2050	<u>GS4-FAN-DM</u>	\$174.00		Frame D main	92mm	24	0.75	2
	<u>GS4-FAN-DB</u>	\$58.00		Frame D board level	70mm	24	0.33	1
GS4-2060 GS4-2075	<u>GS4-FAN-EM1</u>	\$239.00		Frame E main	120mm	24	1.08	2
	<u>GS4-FAN-EB</u>	\$119.00		Frame E board level	120mm	24	0.76	1
GS4-2100	<u>GS4-FAN-EM2</u>	\$303.00		Frame E main	92mm 120mm 120mm	24	0.75 1.08 1.08	3
	<u>GS4-FAN-EB</u>	\$119.00		Frame E board level	120mm	24	0.76	1

* These fans are included with the GS4 drive, and also available separately as spare or replacement components. Electrical connectors are included.

GS4-Specific Optional Accessories – Spare/Replacement Cooling Fans

Accessories Applicable Only to GS4 AC Drives

Please refer to the "GS/DURApulse AC Drives – Accessories" section for accessories applicable to multiple families of GS/DURApulse AC Drives, including GS4.

Cooling Fans for 460V GS4 Drives (Spare/Replacement)

NOTE: The fans described below are included with the applicable GS4 AC Drive, and are also available for purchase separately as spare/replacement components.

GS4 460V Models – (GS4-4xxx) – Fan Selection Table								
Drive Model	Fan Model *			Description	Size	Voltage	Amps / Fan	Fans / Kit
	Part #	Price	Photo					
GS4-43P0 GS4-45P0 GS4-47P5	GS4-FAN-AM	\$28.00		Frame A main	40mm	24	0.15	1
GS4-4010	GS4-FAN-BM1	\$34.50		Frame B main	80mm	24	0.33	1
	GS4-FAN-BB	\$27.00		Frame B board level	40mm	24	0.18	1
GS4-4015 GS4-4020	GS4-FAN-BM2	\$52.00		Frame B main	80mm	24	0.51	1
	GS4-FAN-BB	\$27.00		Frame B board level	40mm	24	0.18	1
GS4-4025 GS4-4030 GS4-4040	GS4-FAN-CM	\$49.00		Frame C main	92mm	24	0.75	1
	GS4-FAN-CB2	\$34.50		Frame C board level	40mm	12	0.60	1
GS4-4050 GS4-4060	GS4-FAN-DM	\$98.00		Frame D0 main	80mm	24	0.75	2
	GS4-FAN-DB	\$58.00		Frame D board level	70mm	24	0.33	1
GS4-4075 GS4-4100	GS4-FAN-DM	\$174.00		Frame D main	92mm	24	0.75	2
	GS4-FAN-DB	\$58.00		Frame D board level	70mm	24	0.33	1
GS4-4125 GS4-4150	GS4-FAN-EM2	\$303.00		Frame E main	92mm 120mm 120mm	24	0.75 1.08 1.08	3
	GS4-FAN-EB	\$119.00		Frame E board level	120mm	24	0.76	1
GS4-4175 GS4-4200	GS4-FAN-FM	\$431.00		Frame F main	92mm	24	0.76	4
	GS4-FAN-FB	\$126.00		Frame F board level	120mm	24	1.08	1
GS4-4250 GS4-4300	GS4-FAN-GM	\$902.00		Frame G main	250mm	48	2.2	2

* These fans are included with the GS4 drive, and also available separately as spare or replacement components. Electrical connectors are included.

GS4-Specific Optional Accessories – Conduit Boxes

Accessories Applicable Only to GS4 AC Drives

Please refer to the "GS/DURApulse AC Drives – Accessories" section for accessories applicable to multiple families of GS/DURApulse AC Drives, including GS4.

Conduit Boxes

Optional Conduit Box Kits can be ordered separately. These kits bolt onto the bottom of the applicable GS4 drive to provide a convenient connection point for conduit entry, allowing the GS4 to maintain a IP20/NEMA 1 environmental protection rating; especially useful for GS4 drives mounted outside of an electrical control panel.

Note: GS4 Frames A through C have integral conduit box space built into the drive. No separate conduit boxes are necessary or available.

GS4 Frame Sizes D0–G – Conduit Box Selection Table					
Drive		Conduit Box **			Description
Model	Frame*	Part #	Price	Photo	
GS4-4060, GS4-4050	D0	<u>GS4-CBX-D0</u>	\$163.00		NEMA 1 conduit box kit for use with GS4 frame size D0 AC drive; mounting hardware included
GS4-2040, GS4-2050; GS4-4075, GS4-4100	D	<u>GS4-CBX-D</u>	\$163.00		NEMA 1 conduit box kit for use with GS4 frame size D AC drive; mounting hardware included
GS4-2060, GS4-2075, GS4-2100; GS4-4125, GS4-4150	E	<u>GS4-CBX-E</u>	\$188.00		NEMA 1 conduit box kit for use with GS4 frame size E AC drive; mounting hardware included
GS4-4150, GS4-4200	F	<u>GS4-CBX-F</u>	\$271.00		NEMA 1 conduit box kit for use with GS4 frame size F AC drive; mounting hardware included
GS4-4250, GS4-4300	G	<u>GS4-CBX-G</u>	\$513.00		NEMA 1 conduit box kit for use with GS4 frame size G AC drive; mounting hardware included

* GS4 Frame Sizes A through C have integral conduit box space built into the drive; separate conduit boxes are not necessary nor available.
 ** Conduit Box Kits include mounting hardware; box base, box cover, bushings, and screws.
 Conduit box dimensions are shown with the AC drive dimensions, as mounted on the drive.

GS4-Specific Optional Accessories – Flange Mounting Kits


Flange Mounting Kits

Optional GS4 drive flange mounting kits allow the heat sinks on the back of select GS4 drives to be positioned through the back of the control enclosure. Since a majority of the heat generated by the GS4 drive will be outside the enclosure, heat load will be reduced and a smaller enclosure may possibly be used. These flange mounting kits are applicable to GS4 drive frame sizes A through C.

NOTE: GS4 Frames D0, D, E, and F have integral flange mounting hardware; additional Flange Mounting Kit not required (see cutout dimensions below).
Frame size G cannot be flange-mounted.

GS4 Frame Sizes A–C – Flange Mounting Kit Selection Table					
Drive		Flange Mounting Kit **			Description
Model	Frame*	Part #	Price	Photo	
GS4-22P0 GS4-23P0 GS4-43P0	A	<u>GS4-FMKIT-1</u>	\$74.00		GS4 series Flange Mounting Kit, NEMA 1; for use with multiple GS4 Frame A drives; adapter plate and mounting hardware included
GS4-21P0 GS4-25P0 GS4-41P0 GS4-42P0 GS4-45P0 GS4-47P5	A	<u>GS4-FMKIT-A</u>	\$62.00		GS4 series Flange Mounting Kit, NEMA 1; for use with multiple GS4 Frame A drives; mounting hardware included
GS4-27P5 GS4-2010 GS4-2015 GS4-4010 GS4-4015 GS4-4020	B	<u>GS4-FMKIT-B</u>	\$70.00		GS4 series Flange Mounting Kit, NEMA 1; for use with GS4 Frame B drives; mounting hardware included
GS4-2020 GS4-2025 GS4-2030 GS4-4025 GS4-4030 GS4-4040	C	<u>GS4-FMKIT-C</u>	\$79.00		GS4 series Flange Mounting Kit, NEMA 1; for use with GS4 Frame C drives; mounting hardware included

* See panel cutout dimensions below for GS4 Frames A, B, C.
* GS4 Frames D0, D, E, and F have integral flange mounting hardware; additional Flange Mounting Kit not required. See Appendix A of the GS4 User Manual for panel cut-out dimensions for frames D0, E, F.
* Frame size G cannot be flange-mounted.

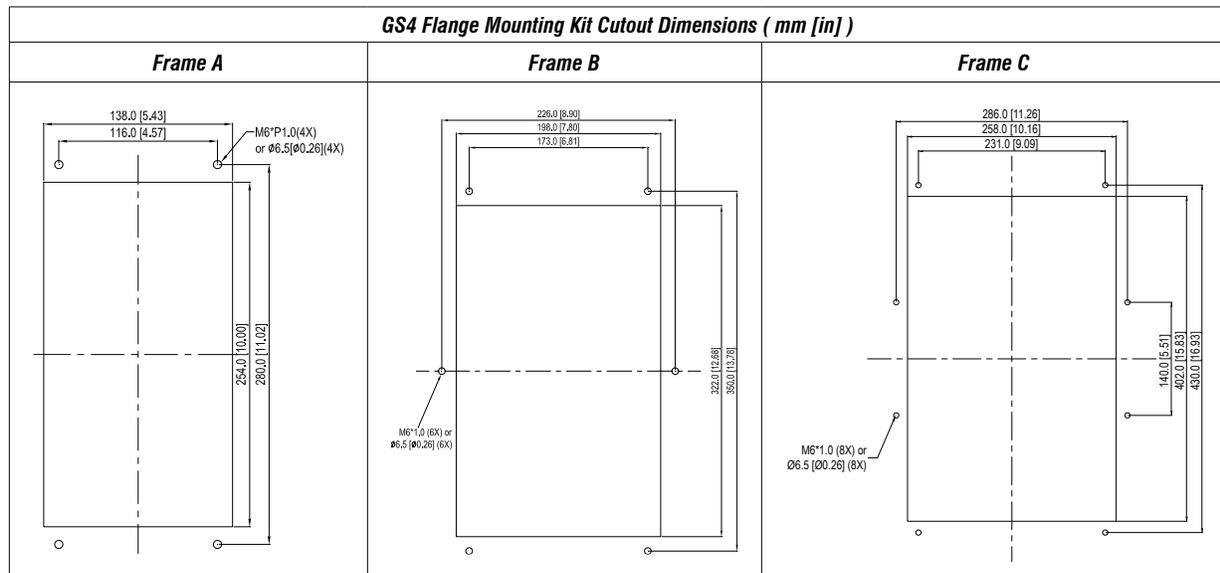

DURAPULSE GS4 AC Drives Specifications – Installation

Understanding the installation requirements for your DURAPULSE AC drive will help to ensure that it operates within its environmental and electrical limits.

Note: Never use only this catalog for installation instructions or operation of equipment; refer to the User Manual, GS4_UMW.

Environmental Conditions for GS4 AC Drives			
Condition	Operation	Storage	Transportation
Installation Location	IEC60364-1/IEC60664-1 Pollution degree 2, Indoor use only	n/a	n/a
Ambient Temperature	see separate Operating Temperature table below		
Relative Humidity	Max 90%, non-condensing, non-frozen	Max 95%, non-condensing, non-frozen	
Air Pressure	86 to 106 kPa		70 to 106 kPa
Pollution Level	IEC721-3-3, no concentrate		
	Class 3C2; Class 3S2	Class 2C2; Class 2S2	Class 1C2; Class 1S2
Altitude	0–1000m (see separate derating section for altitudes of 1000–3000m)	n/a	n/a
Package Drop	n/a	ISTA procedure 1A (according to weight) IEC60068-2-31	
Vibration	1.0mm, peak to peak value range from 2Hz to 13.2Hz; 0.7G–1.0G range from 13.2Hz to 55Hz; 1.0G range from 55Hz to 512Hz. Comply with IEC 60068-2-6		
Impact	IEC/EN 60068-2-27		
Installation Orientation	<div style="text-align: center;"> <p>Max allowed offset angle $\pm 10^\circ$ (from vertical installation position)</p> </div>		

Operating Temperature and Protection Level					
Frame Size	Top cover	Conduit Box	Protection Level	Operating Temperature	
A–C	230V: 1.0–30 hp 460V: 1.0–40 hp	With top cover removed	Standard conduit plate	IP20 / UL Open Type	-10–50°C [14–122°F]
		With top cover in place		IP20 / UL Type1 / NEMA 1	-10–40°C [14–104°F]
D0–G	230V: >30hp 460V: >40hp	N/A	With conduit box	IP20 / UL Type1 / NEMA 1	-10–40°C [14–104°F]
	230V: >30hp 460V: >40hp	N/A	Without conduit box	IP00 / IP20 / UL Open Type * Only the circled area is IP00. Other parts are IP20.	-10–50°C [14–122°F]

* Only the exposed terminal blocks are IP00; the other components are IP20



WARNING: AC DRIVES GENERATE A LARGE AMOUNT OF HEAT WHICH MAY DAMAGE THE AC DRIVE. AUXILIARY COOLING METHODS MAY BE REQUIRED TO AVOID EXCEEDING MAXIMUM OPERATING TEMPERATURE. WHEN POSSIBLE, CONSIDER FLANGE MOUNTING TO LOWER ENCLOSURE TEMPERATURES.



WARNING: MAXIMUM AMBIENT TEMPERATURES MUST NOT EXCEED 50°C (122°F), OR 40°C (104°F), FOR ALL GS4 MODELS.

DURAPULSE GS4 AC Drives Specifications – Air Flow and Power (Heat) Dissipation

GS4 AC Drives Air Flow and Power (Heat) Dissipation									
Model Number	Airflow Rate ¹⁾ for Cooling						Power (Heat) Dissipation ²⁾		
	Flow Rate ¹⁾ (cfm)			Flow Rate ¹⁾ (m ³ /hr)			Power Dissipation ²⁾ (Watt)		
	External	Internal	Total	External	Internal	Total	External (Heat sink)	Internal	Total
GS4-21P0	–	–	–	–	–	–	33	27	60
GS4-22P0	14	–	14	24	–	24	56	31	87
GS4-23P0	14	–	14	24	–	24	79	36	115
GS4-25P0	10	–	10	17	–	17	113	46	159
GS4-27P5	40	14	54	68	24	92	197	67	264
GS4-2010	66	14	80	112	24	136	249	86	335
GS4-2015	58	14	73	99	24	123	409	121	530
GS4-2020	166	12	178	282	20	302	455	161	616
GS4-2025	166	12	178	282	20	302	549	184	733
GS4-2030	166	12	178	282	20	302	649	216	865
GS4-2040	179	30	209	304	51	355	913	186	1099
GS4-2050	179	30	209	304	51	355	1091	220	1311
GS4-2060	228	73	301	387	124	511	1251	267	1518
GS4-2075	228	73	301	387	124	511	1401	308	1709
GS4-2100	246	73	319	418	124	542	1770	369	2139
GS4-41P0	–	–	–	–	–	–	33	25	58
GS4-42P0	–	–	–	–	–	–	45	29	74
GS4-43P0	14	–	14	24	–	24	71	33	104
GS4-45P0	10	–	10	17	–	17	103	38	141
GS4-47P5	10	–	10	17	–	17	134	46	180
GS4-4010	40	14	54	68	24	92	216	76	292
GS4-4015	66	14	80	112	24	136	287	93	380
GS4-4020	58	14	73	99	24	123	396	122	518
GS4-4025	99	21	120	168	36	204	369	138	507
GS4-4030	99	21	120	168	36	204	476	158	634
GS4-4040	126	21	147	214	36	250	655	211	866
GS4-4050	179	30	209	304	51	355	809	184	993
GS4-4060	179	30	209	304	51	355	929	218	1147
GS4-4075	179	30	209	304	51	355	1156	257	1413
GS4-4100	186	30	216	316	51	367	1408	334	1742
GS4-4125	257	73	330	437	124	561	1693	399	2092
GS4-4150	223	73	296	379	124	503	2107	491	2598
GS4-4175	224	112	336	381	190	571	2502	579	3081
GS4-4200	289	112	401	491	190	681	3096	687	3783
GS4-4250			454			771			4589
GS4-4300			454			771			5772

The required airflow shown in chart is for installing a single GS4 drive in a confined space. When installing multiple GS4 drives, the required air volume would be the cumulative air volume for all drives in the enclosure.

Heat dissipation shown in the chart is for installing a single GS4 drive in a confined space. When installing multiple drives, the volume of heat dissipation should be the cumulative heat dissipation of all drives in the enclosure. Heat dissipation for each model is calculated by rated voltage, current and default carrier frequency.

- 1) External flow rate is across the heat sink. Internal flow rate is through the chassis. Published flow rates are the result of active cooling using fans; factory-installed in the drive. Unpublished flow rates (-) are the result of passive cooling in drives without factory-installed fans.
- 2) When calculating power dissipation (Watt Loss) use the total value if the drive is foot mounted, or the internal value if the drive is flange mounted. Where only a total value is published, these models cannot be flange mounted.

Dimensions for Minimum Clearance * (mm / in)				
Frame Size	Above & Below	Side to Non-Heat Source	Side to Heat Source	Front
A–C	60 / 2.4	30 / 1.2	10 / 0.4	0 / 0
D(0)–F	100 / 4.0	50 / 2.0	n/a	0 / 0
G	200 / 7.9	100 / 4.0	2 x B	0 / 0

* The minimum mounting clearances stated in this table applies to GS4 drives frames A to G. Failure to follow the minimum mounting clearances may cause the fan to malfunction and cause a heat dissipation problem.


DURAPULSE GS4 AC Drives Specifications – Terminals

Control Circuit Terminals			Main Circuit Terminals	
Terminal	Description	Remarks	Terminal	Description
+10V	Potentiometer Power Supply	Analog frequency setting: +10VDC 20mA max output	R/L1	Input Power – phase 1
-10V		Analog frequency setting: -10VDC 20mA max output	S/L2	Input Power – phase 2
+24V	Digital Control Signal Source	+24V±5%, 200mA max output; use with DCM	T/L3	Input Power – phase 3
AI1	Analog Input 1	Range: 0–10V or 0/4–20mA = 0–Max Output Frequency AI1 switch = SW3; factory setting is 0–10V Impedance: 20kΩ (SW3 = 0–10V); 250Ω (SW3 = 0/4–20mA)	U/T1, V/T2, W/T3	AC Drive Output
AI2	Analog Input 2	Range: 0/4–20mA or 0–10V = 0–Max Output Frequency AI2 Switch = SW4; factory setting is 0–20mA Impedance: 250Ω (SW4 = 0/4–20mA); 20kΩ (SW4 = 0–10V);	+1, +2	DC Choke Connection (frames A–C)
AI3	Analog Input 3	Impedance: 20kΩ Range: -10VDC to +10 VDC = 0–Max Output Frequency <i>Note: For -10V to +10V operation, connect the pot to +10V and -10V. Keep the pot wiper connected to AI3.</i>	B1, B2	Braking Resistor Connection (frames A–C)
ACM	Analog Common	Common for analog terminals	+1/DC+, -/DC-	External Dynamic Brake Unit (frames D–G)
AO1	Analog Output 1	-10 to +10V max output current 2mA; max load 5kΩ Resolution: 0–10V corresponds to max operation frequency Range: 0–10V or -10 to +10V AO1 Switch = SW1, factory setting is 0–10V	⏏	Ground
AO2	Analog Output 2 (internal circuit same as AO1)	0–10V max output current 2mA; max load 5kΩ 0–20mA max output current 20mA; max load 500Ω Resolution: 0–10V corresponds to max operation frequency Range: 0–10V or 0/4–20mA AO2 Switch = SW2; factory setting is 0–10V		
DIC	Digital Input Common Rail	Common terminal for multi-function inputs; Can be tied to DCM (for sinking) or to +24V (for sourcing)		
DI1–DI8	Digital Inputs 1 thru 8	ON: the activation current is 3.3mA ≥ 11VDC OFF: leakage current tolerance is 1.4mA ≤ 5VDC		
DCM	Digital Signal Common	Refer to terminals FO, FWD, REV		
DO1	Digital Output 1	The AC motor drive releases various monitor signals such as drive in operation, frequency attained, and overload indication via transistor (open collector). Range: 5–48 VDC. Use with DOC.		
DO2	Digital Output 2 (internal circuit same as DO1)	Multi-function Output 2 (photocoupler). Range: 5–48 VDC. Use with DOC.		
DOC	Digital Output Common	Max 5–48 VDC, 50mA (user supplied)		
+24V	STO Control Signal Source			
ECM	EStop Common			
SCM1	STO Input 1 Common	Safe Torque Off function.		
SCM2	STO Input 2 Common	Refer to Appendix E: Safe Torque Off for more details.		
STO1	STO Input 1			
STO2	STO Input 2			
FO	Digital Frequency Output	High-speed pulse output. Use with DCM. Digital Frequency Out = Drive Output Frequency [Hz] × P3.38 [Frequency Output Multiplier]. Duty-cycle: 50% ±1% Min load impedance: 1kΩ/100pf Max current: 30mA Max voltage: 30VDC		
FWD	Forward Command	Use with DCM. ON = forward running OFF = deceleration to stop		
R1	R1 Relay Common	Resistive Load: 3A(N.O.) / 3A(N.C.); 250VAC 5A(N.O.) / 3A(N.C.); 30VDC Inductive Load (COS 0.4): 1.2A(N.O.) / 1.2A(N.C.); 250VAC These terminals are to output monitoring signals, such as drive in operation, frequency attained, or overload indication. Note: R1 and R2 have N.O. and N.C. contacts.		
R1C	R1 Relay N.C.			
R1O	R1 Relay N.O.			
R2	R2 Relay Common			
R2C	R2 Relay N.C.			
R2O	R2 Relay N.O.			
REV	Reverse Command	Use with DCM. ON = reverse running OFF = deceleration to stop		
RJ45-1	RJ45 Port 1 (RS-485)	Pins 1,2,7,8: Reserved		
RJ45-2	RJ45 Port 2 (RS-485)	Pins 3,6: SGND Pin 4: SG- Pin 5: SG+ (RJ45-1 and RJ45-2 are connected internally to ports SG+ and SG- below)		
SG+, SG-, SGND	Modbus RS-485 (SG+ and SG- are connected internally to the two RJ45 ports above)			
⏏	Digital Control Ground			

DURAPULSE GS4 AC Drives – Basic Wiring Diagram

Power Wiring Diagram: GS4 230V Models – Single-Phase


Note: Users MUST connect wiring according to the circuit diagram shown below. (Refer to user manual GS4-UMW for additional specific wiring information.)
Note: We specify DC chokes, but we do not stock them.

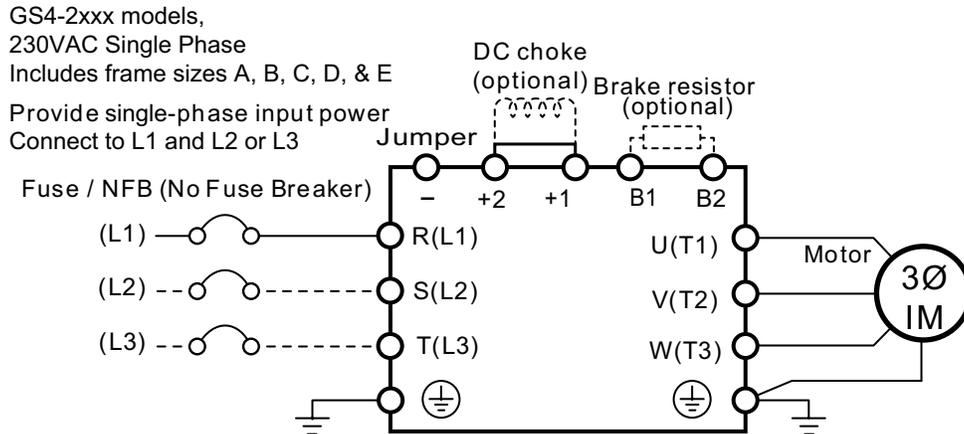

Connect 230VAC, Single-Phase power to any two of the R, S, or T terminals


Power Wiring Diagram: GS4 Frame Size A, B, C Models – Three-Phase

Note: Users MUST connect wiring according to the circuit diagram shown below. (Refer to user manual GS4-UMW for additional specific wiring information.)
Note: We specify DC chokes, but we do not stock them.

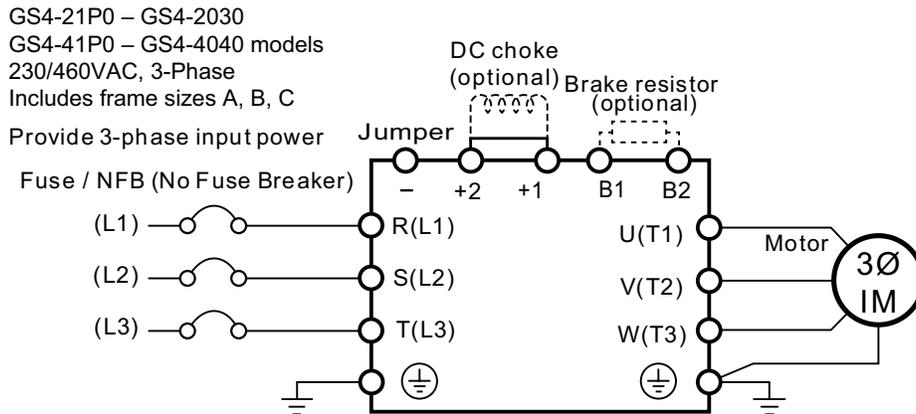

Power Wiring Diagram: GS4 Frame Size D0, D, E, F Models – Three-Phase

Note: Users MUST connect wiring according to the circuit diagram shown below. (Refer to user manual GS4-UMW for additional specific wiring information.)

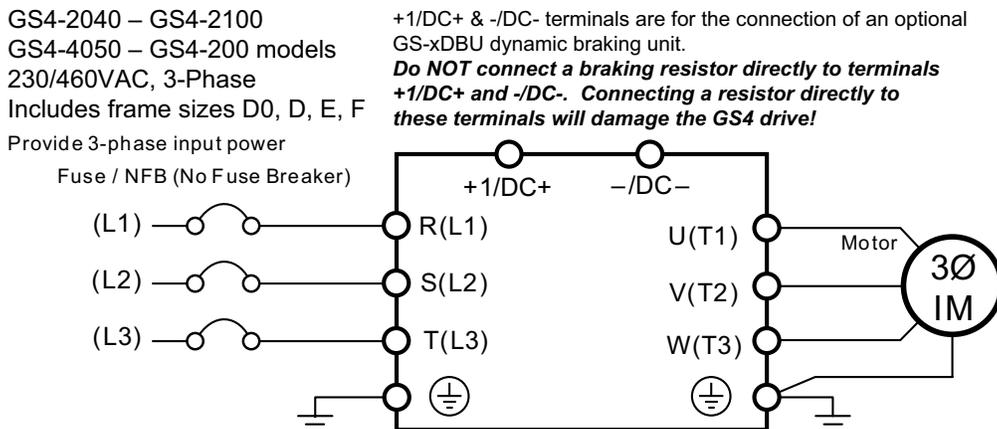

DURAPULSE GS4 AC Drives – Basic Wiring Diagram

Power Wiring Diagram: GS4 Frame Size G Models – Three-Phase


Note: Users MUST connect wiring according to the circuit diagram shown below. (Refer to user manual GS4-UMW for additional specific wiring information.)

GS4-4250 &
GS4-4300 models
460VAC, 3-Phase

Provide 3-phase input power

+1/DC+ & -/DC- terminals are for the connection of an optional GS-xDBU dynamic braking unit.

Do NOT connect a braking resistor directly to terminals +1/DC+ and -/DC-. Connecting a resistor directly to these terminals will damage the GS4 drive!

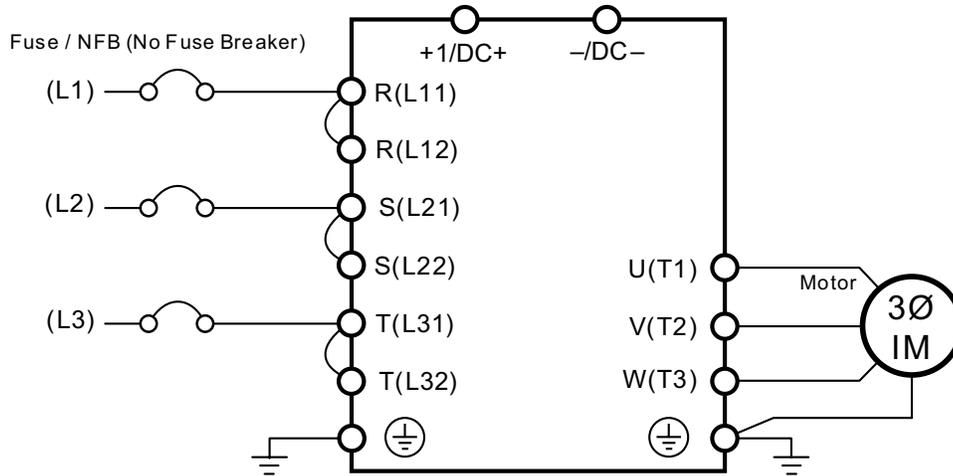

DURAPULSE GS4 AC Drives – Basic Wiring Diagram


Control Wiring Diagram: Full I/O with Sinking Inputs (field devices are sourcing)



Note: Users must connect wiring according to the circuit diagram shown below.



WARNING: DO NOT PLUG A MODEM OR TELEPHONE INTO THE DURAPULSE RJ45 SERIAL COMM PORT, OR PERMANENT DAMAGE MAY RESULT.

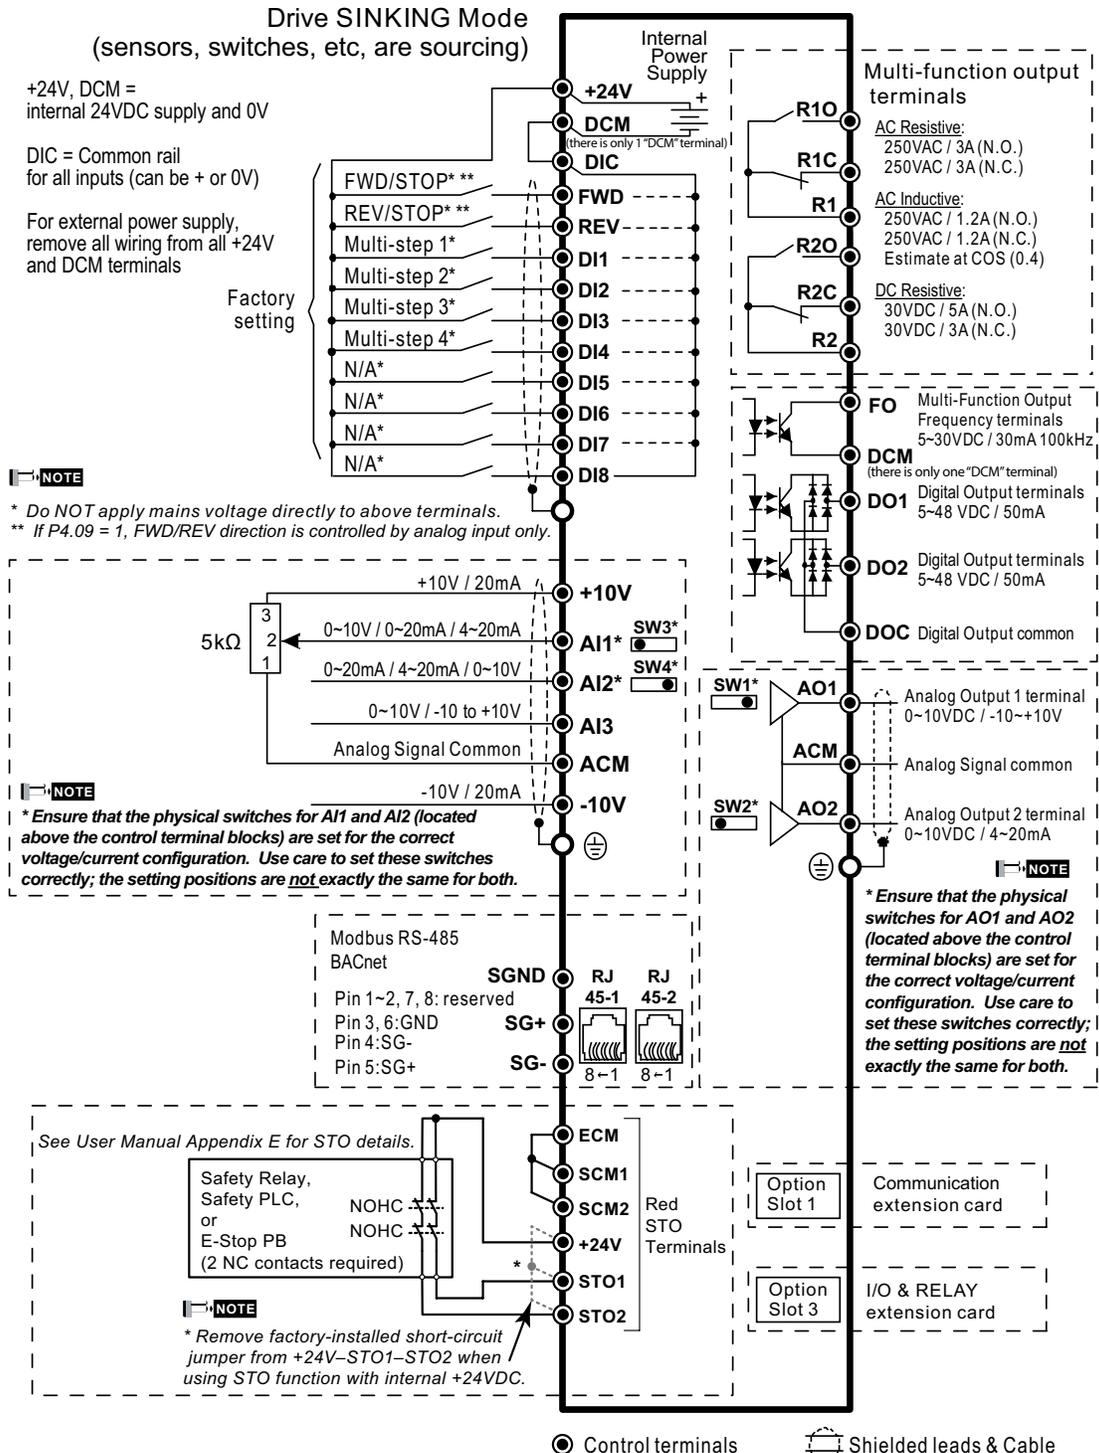

● Control terminals ⊕ Shielded leads & Cable

DURAPULSE GS4 AC Drives – Basic Wiring Diagram


Control Wiring Diagram: Full I/O with Sourcing Inputs (field devices are sinking)



Note: Users must connect wiring according to the circuit diagram shown below.



WARNING: DO NOT PLUG A MODEM OR TELEPHONE INTO THE DURAPULSE RJ45 SERIAL COMM PORT, OR PERMANENT DAMAGE MAY RESULT.

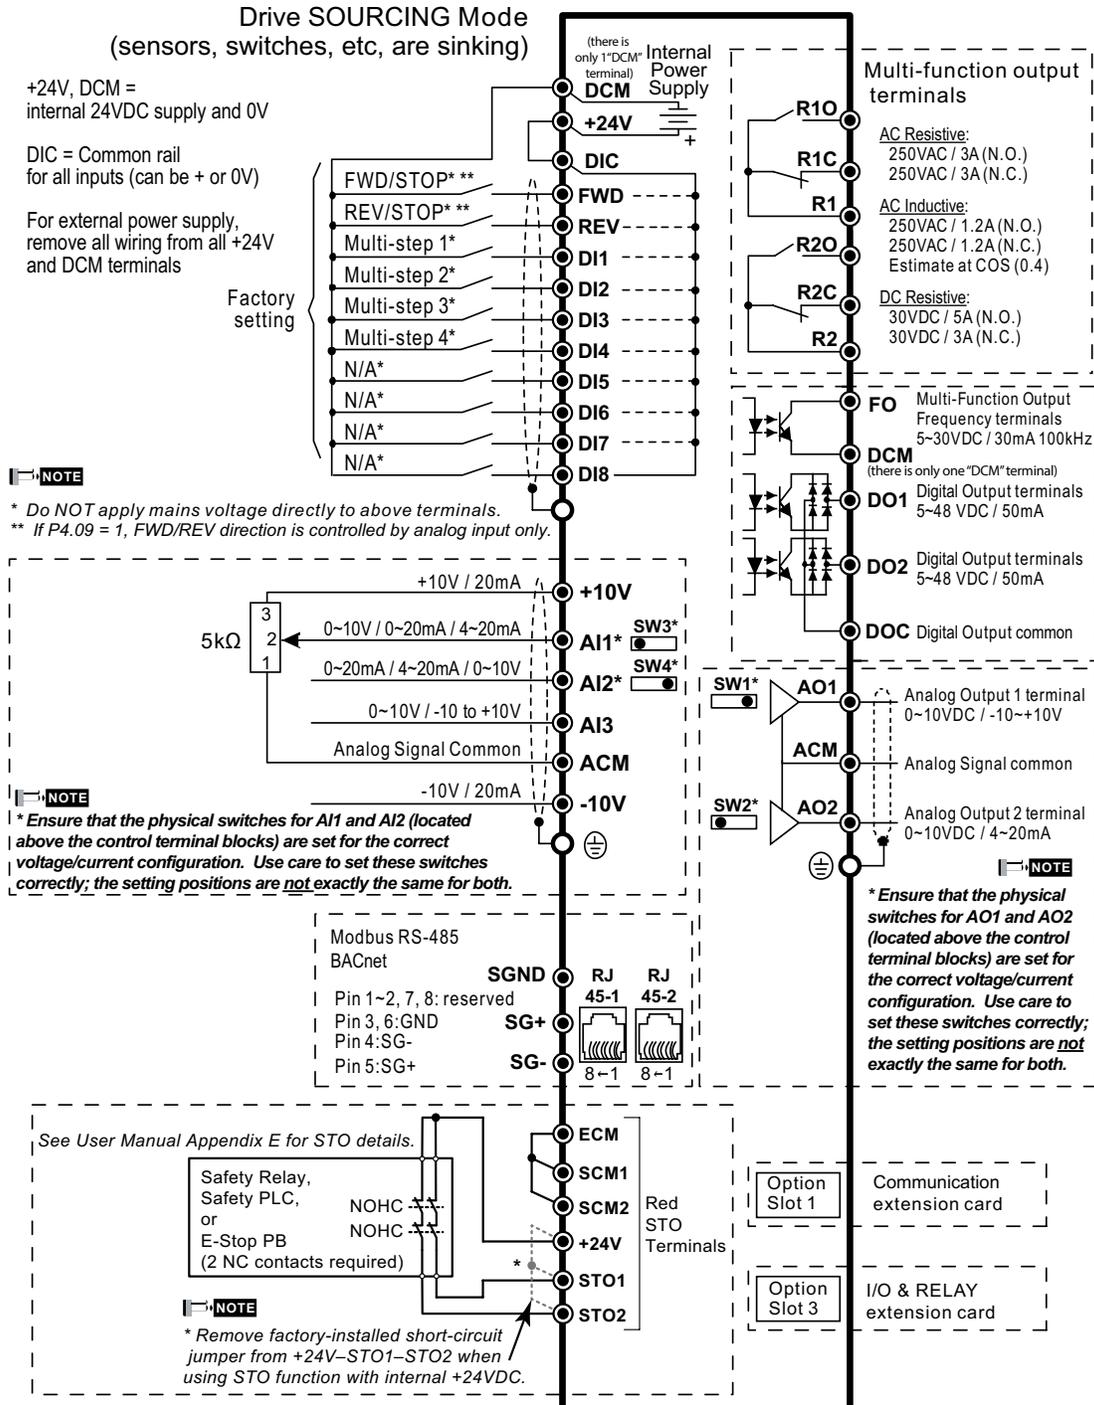

● Control terminals Ⓢ Shielded leads & Cable

DURAPULSE GS4 AC Drives – Dimensions

GS4 DURAPULSE Frame Sizes by Drive Model


GS4 DURAPULSE Frame Sizes by Drive Model													
A		B		C		DO	D		E		F	G	
230V	460V	230V	460V	230V	460V	460V	230V	460V	230V	460V	460V	460V	460V
GS4-21P0	GS4-41P0	GS4-27P5	GS4-4010	GS4-2020	GS4-4025	GS4-4050	GS4-2040	GS4-4075	GS4-2060	GS4-4125	GS4-4175	GS4-4250	
GS4-22P0	GS4-42P0	GS4-2010	GS4-4015	GS4-2025	GS4-4030	GS4-4060	GS4-2050	GS4-4100	GS4-2075	GS4-4150	GS4-4200	GS4-4300	
GS4-23P0	GS4-43P0	GS4-2015	GS4-4020	GS4-2030	GS4-4040	-	-	-	GS4-2100	-	-	-	
GS4-25P0	GS4-45P0	-	-	-	-	-	-	-	-	-	-	-	
-	GS4-47P5	-	-	-	-	-	-	-	-	-	-	-	

Dimensions – GS4 AC Drives

Units = (mm [in])

See our website: www.AutomationDirect.com for complete engineering drawings.

Dimensions – Frame Size A

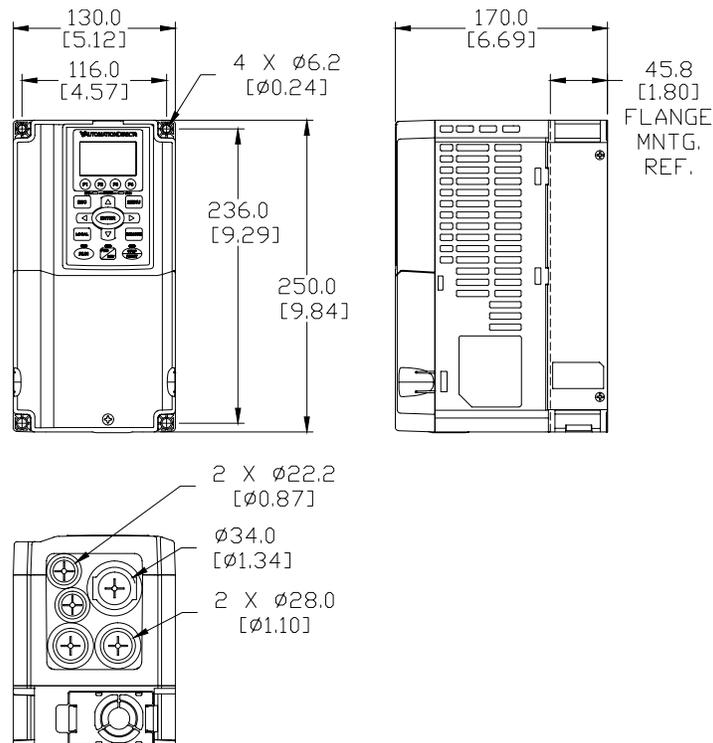


DURAPULSE GS4 AC Drives – Dimensions

Dimensions – GS4 AC Drives


(Units = mm [in])

See our website: www.AutomationDirect.com for complete engineering drawings.

Dimensions – Frame Size B

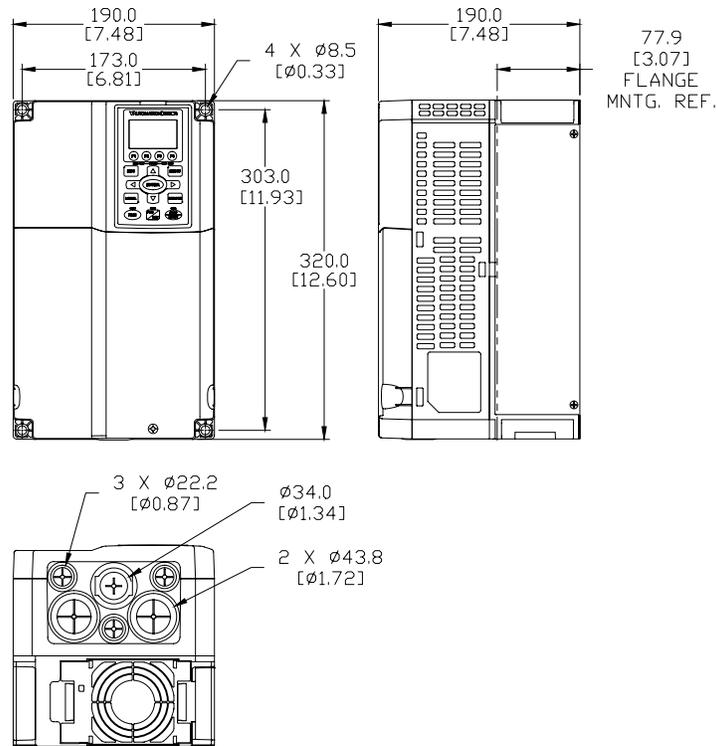

Dimensions – Frame Size C

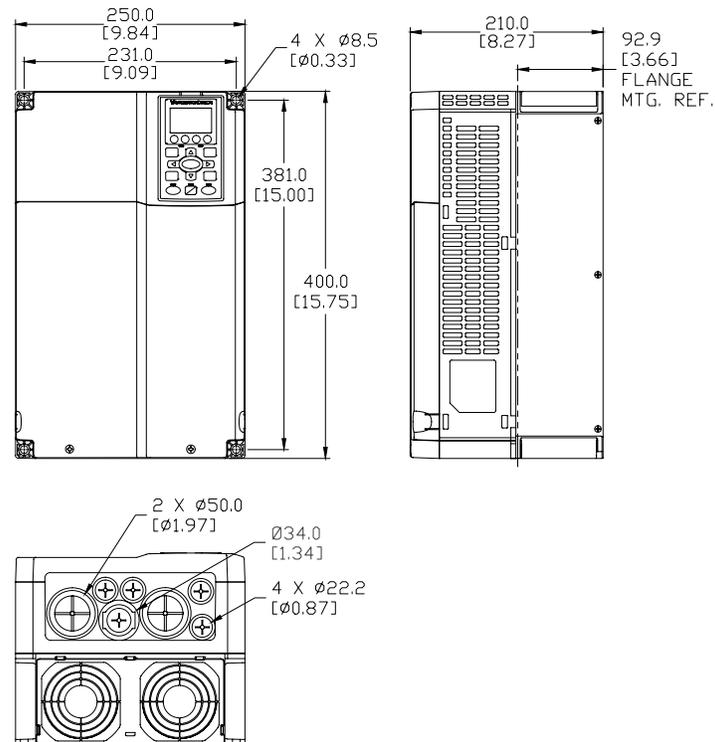


DURAPULSE GS4 AC Drives – Dimensions

Dimensions – GS4 AC Drives


(Units = mm [in])

See our website: www.AutomationDirect.com for complete engineering drawings.

Dimensions – Frame Size D0

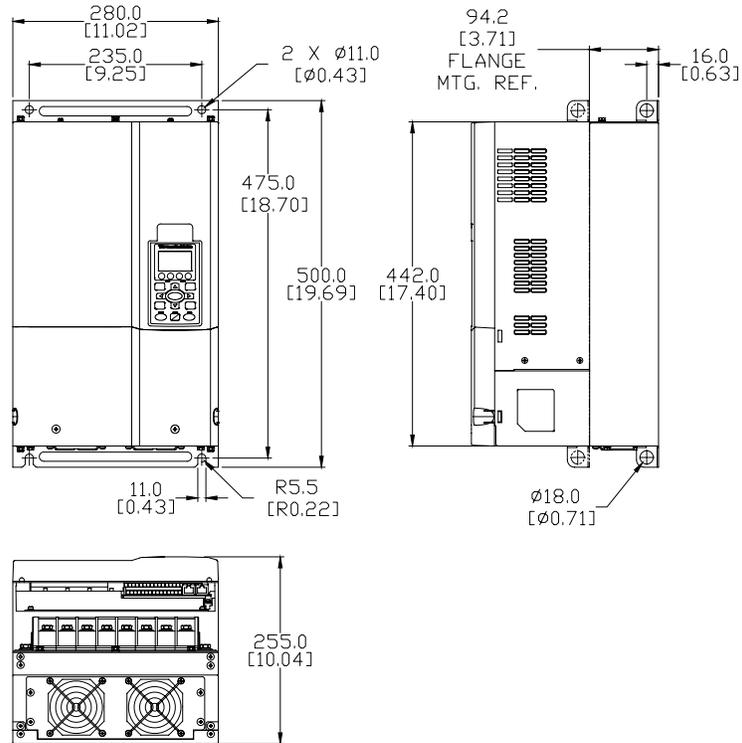

Dimensions – Frame Size D0 with Conduit Box

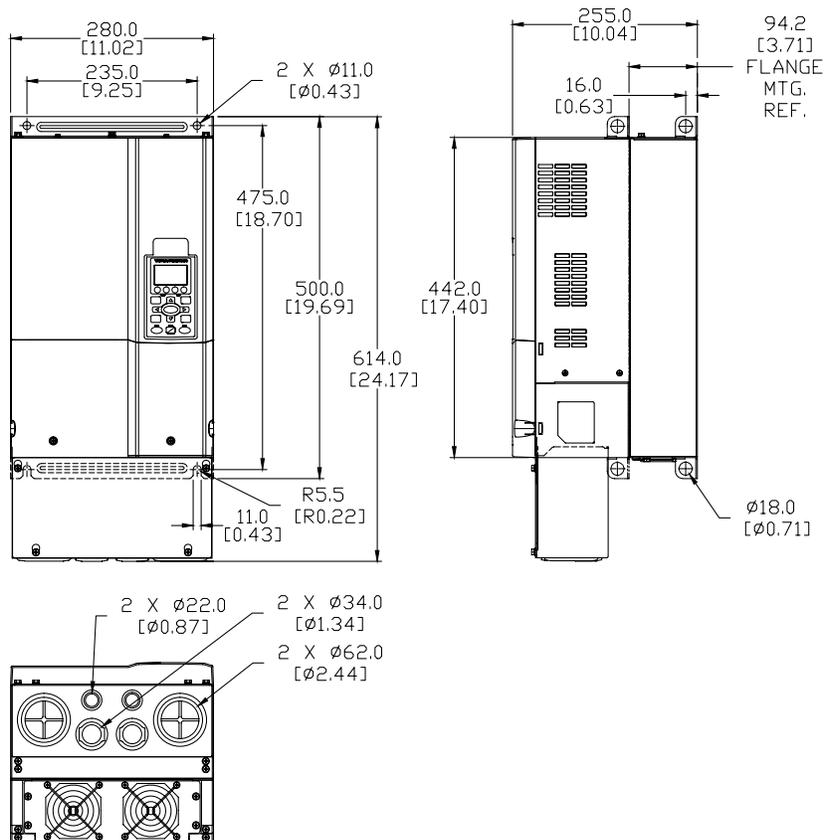


DURAPULSE GS4 AC Drives – Dimensions

Dimensions – GS4 AC Drives


(Units = mm [in])

See our website: www.AutomationDirect.com for complete engineering drawings.

Dimensions – Frame Size D

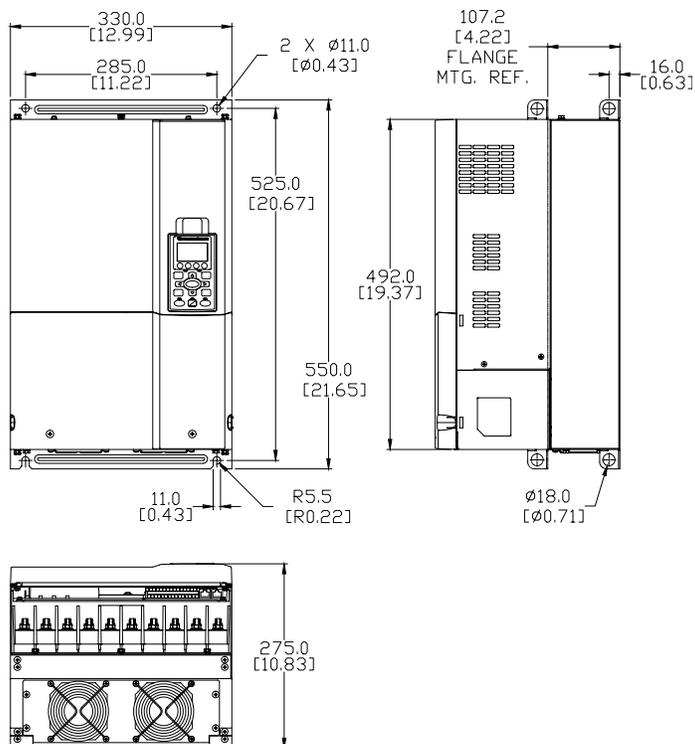

Dimensions – Frame Size D with Conduit Box

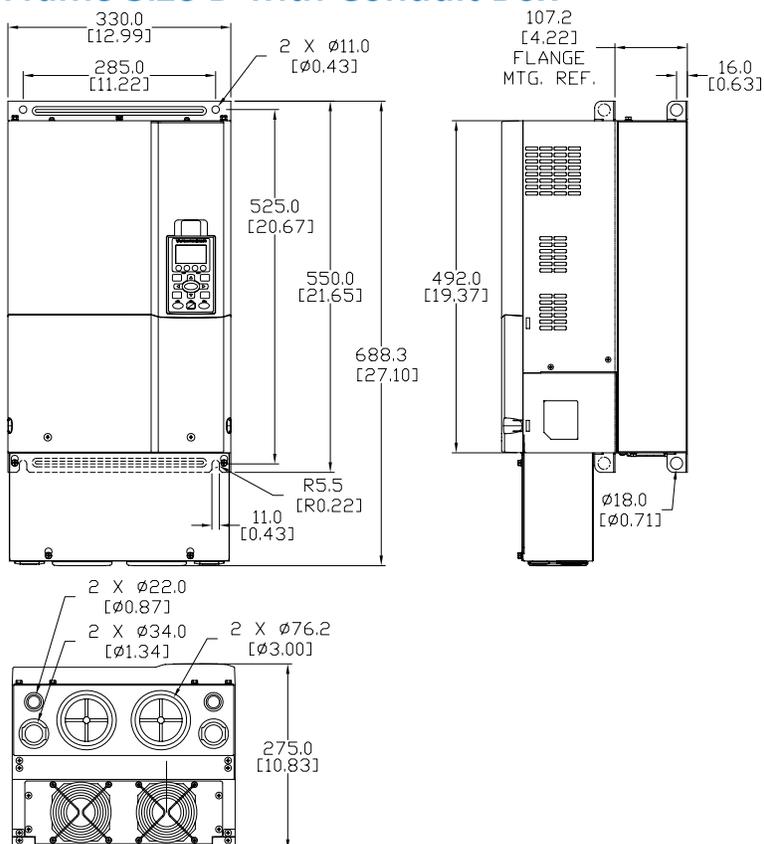


DURAPULSE GS4 AC Drives – Dimensions

Dimensions – GS4 AC Drives


(Units = mm [in])

See our website: www.AutomationDirect.com for complete engineering drawings.

Dimensions – Frame Size E

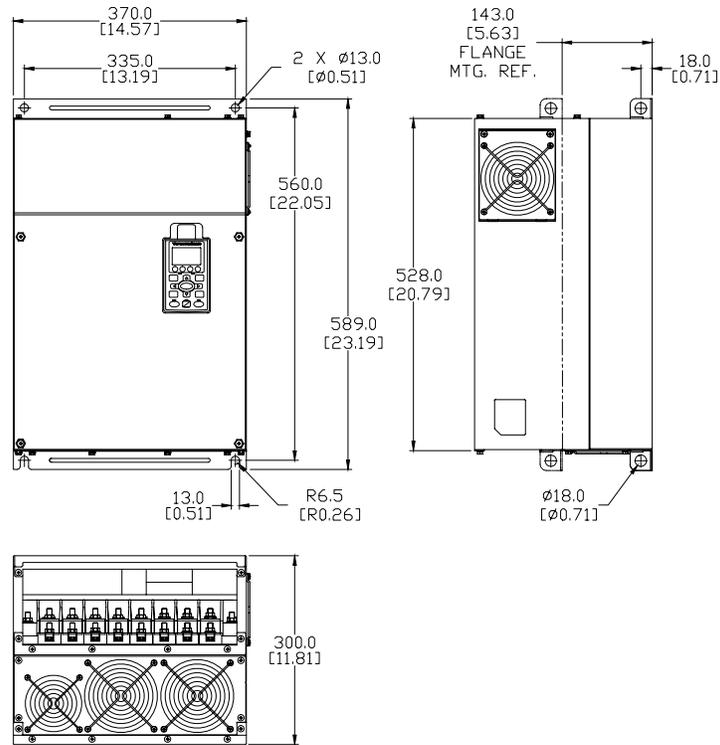

Dimensions – Frame Size E with Conduit Box

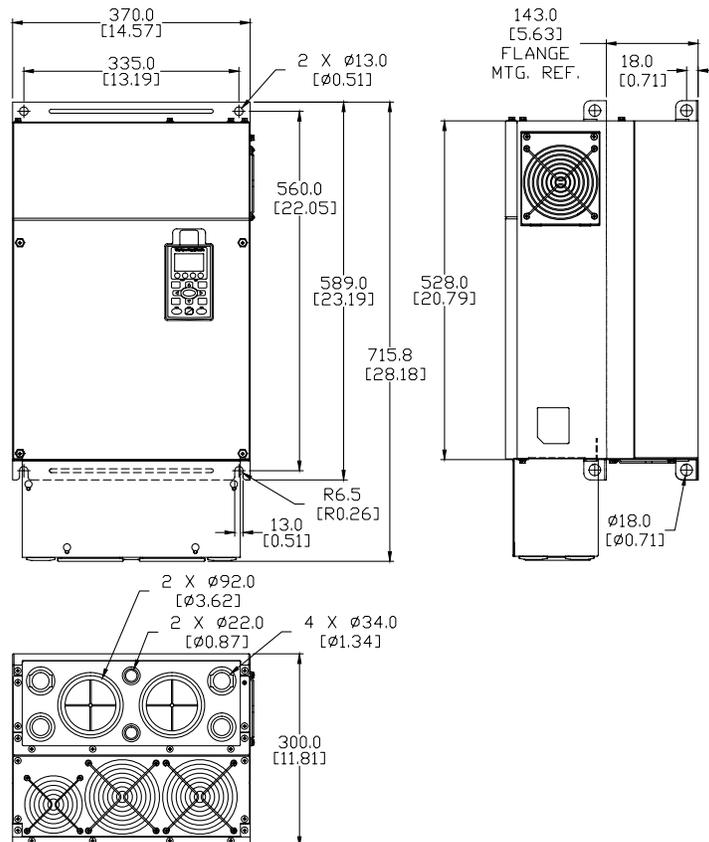


DURAPULSE GS4 AC Drives – Dimensions

Dimensions – GS4 AC Drives


(Units = mm [in])

See our website: www.AutomationDirect.com for complete engineering drawings.

Dimensions – Frame Size F

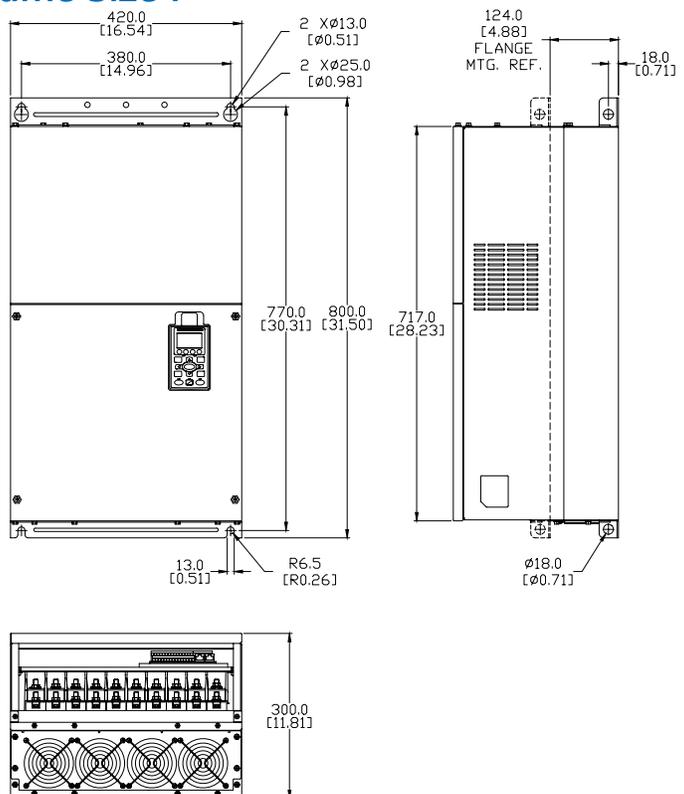

Dimensions – Frame Size F with Conduit Box

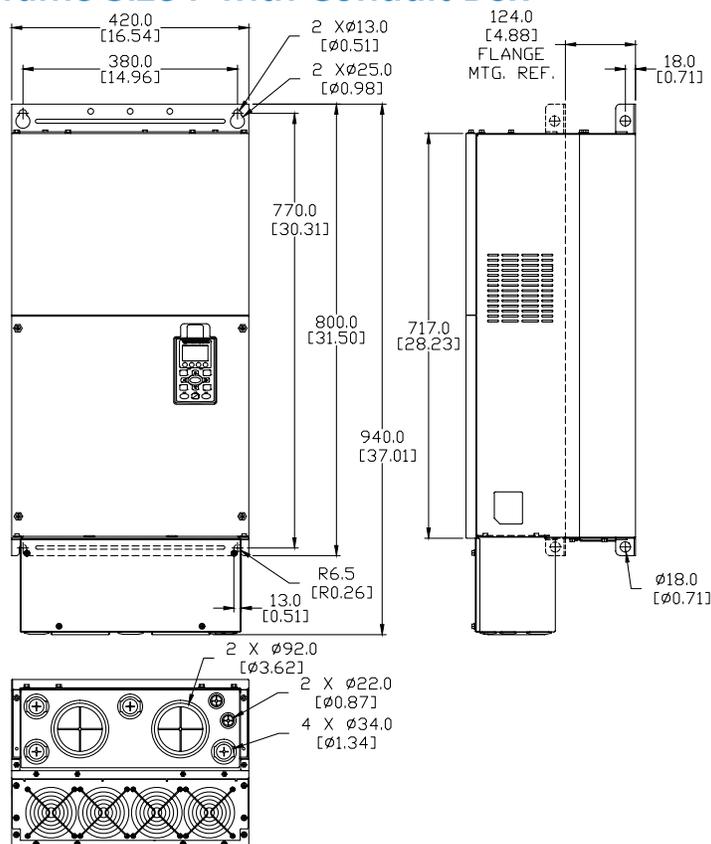


DURAPULSE GS4 AC Drives – Dimensions

Dimensions – GS4 AC Drives


(Units = mm [in])

See our website: www.AutomationDirect.com for complete engineering drawings.

Dimensions – Frame Size G

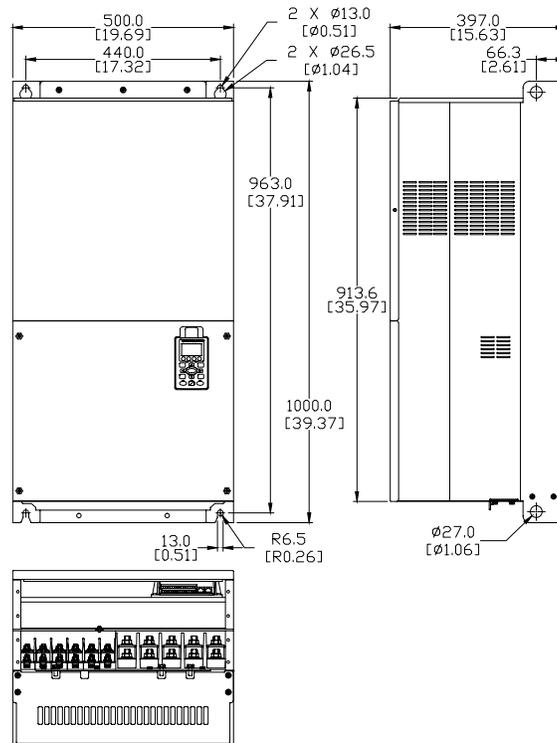


Dimensions – Frame Size G with Conduit Box

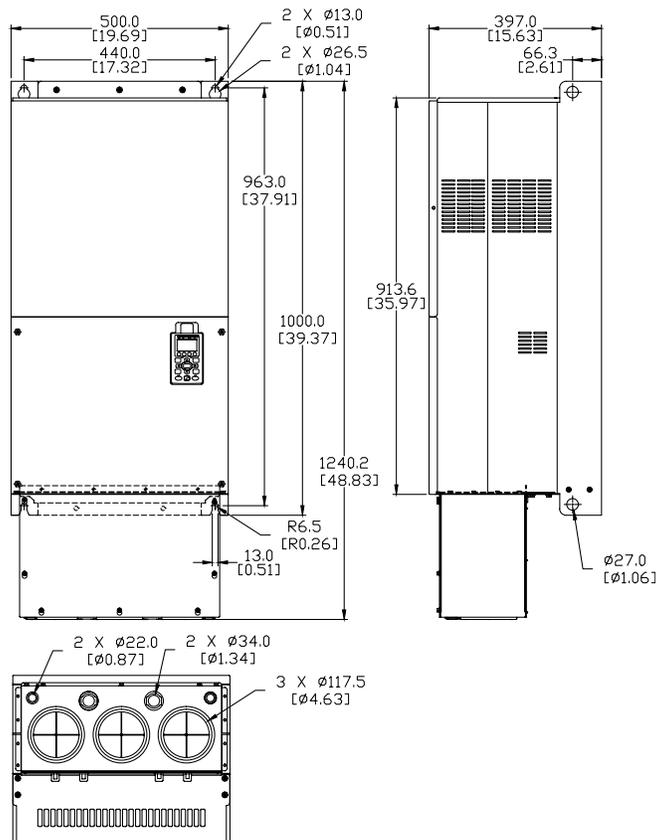

AC Drives Optional Accessories – Overview

Drive Accessories

(not all accessories are applicable for every drive model)

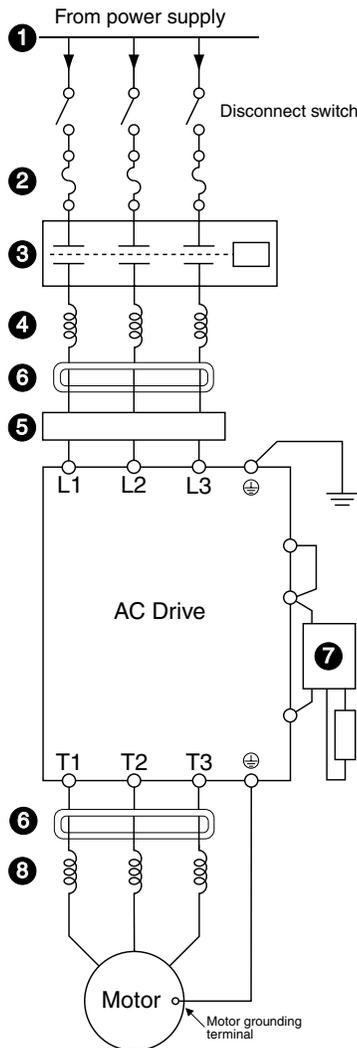

1 Power Supply

Please follow the specific power supply requirements as detailed in the specific drive manual.

2 Fuses

Input fuses protect the AC drive from excessive input current due to line surges, short circuits, and ground faults. They are recommended for all installations and may be required for UL-listed installations.

3 Contactor (Optional)

Do not use a contactor or disconnect switch for run/stop control of the AC drive and motor. This will reduce the operating life cycle of the AC drive. Cycling a power circuit switching device while the AC drive is in run mode should be done only in emergency situations.

4 Input Line Reactor (Optional)

See the Line Reactors section at www.automationdirect.com for more information.

Input line reactors protect the AC drive from transient overvoltage conditions, typically caused by utility capacitor switching. The input line reactor also reduces the harmonics associated with AC drives. Input line reactors are recommended for all installations.

5 EMI filter (Optional)

See the EMI Filters section at www.automationdirect.com for more information.

Input EMI filters reduce electromagnetic interference or noise on the input side of the AC drive. They are required for CE compliance and recommended for installations prone to or sensitive to electromagnetic interference.

6 RF filter (Optional)

RF filters reduce the radio frequency interference or noise on the input or output side of the inverter.

7 Braking Unit and/or Braking Resistor (Optional)

Dynamic braking allows the AC drive to produce additional braking (stopping) torque. AC drives can typically produce between 15% & 20% braking torque without the addition of any external components. The addition of optional braking may be required for applications that require rapid deceleration or high inertia loads.

8 Output Load Reactor or Voltage Time (dV/dT) Filter (Optional)

Output line reactors protect the motor insulation against AC drive short circuits and IGBT reflective wave damage, and also "smooth" the motor current waveform, allowing the motor to run cooler. They are **recommended for operating "noninverter-duty" motors and when the length of wiring between the AC drive and motor is less than 100 feet.**

Voltage Time filters provide enhanced protection for motors with distances up to 1,000 feet.

Voltage Time filters provide even more protection against wave reflection and reduce common mode noise. They are recommended when the length of wiring between the AC drive and motor is from 100 feet up to 1,000 feet.

See www.automationdirect.com for specific product offerings.

GS4 DURApulse Drives Accessories – Line-Side Reactors

Line-Side Reactors for GS4/DURAPULSE AC Drives – Selection Specifications

Supply: 230V, 1Ø, 50/60 Hz (<i>Constant</i> Torque; reactor installed <i>Line</i> Side)									
GS4 Model	Derated Output (hp)*	CT: 1Ø Input Amps (rms)**	Saturation Amps (rms)	Inductance (mH)		Max Motor kW	LR Model	Rated Amps	LR 3% Inductance
				3% Impedance	5% Impedance				
GS4-21P0	0.5	4.2	7.6	2.506	4.176	0.37	LR2-20P5-1PH	4.9	3.74
GS4-22P0	0.75	5.6	10.1	1.879	3.132	0.25	LR-21P0-1PH	8	2.29
GS4-23P0	1	8.7	15.7	1.210	2.016	0.25	LR-21P0-1PH	8	2.29
GS4-25P0	2	14	25	0.752	1.253	0.37	LR-22P0-1PH	12.0	1.53
GS4-27P5	3	19	34	0.554	0.923	0.75	LR-23P0-1PH	17.0	1.08
GS4-2010	3	19	34	0.554	0.923	0.75	LR-23P0-1PH	17.0	1.08
GS4-2015	5	30	54	0.351	0.585	3.7	LR-2010	30.8	0.342
GS4-2020	7.5	43	77	0.245	0.408	5.5	LR-2015	46.2	0.220
GS4-2025	10	57	103	0.184	0.307	7.5	LR-2020	59.4	0.172
GS4-2030	10	57	103	0.184	0.307	7.5	LR-2020	59.4	0.172
GS4-2040	10	57	103	0.184	0.307	7.5	LR-2020	59.4	0.172
GS4-2050	10	57	103	0.184	0.307	7.5	LR-2020	59.4	0.172
GS4-2060	15	85	153	0.124	0.206	11	LR-2025	74.8	0.138
GS4-2075	20	113	203	0.093	0.155	15	LR-2040	114	0.0886
GS4-2100	25	130	234	0.081	0.135	18.5	LR-2050	143	0.0699

* Drive output HP is derated when supplied single phase.
 ** Amperage ratings expressed in the column CT: 1Ph Input Amps (rms) are with a line reactor installed on the line side of the drive.

GS4 DURApulse Drives Accessories – Load-Side Reactors

Load-Side Reactors for GS4/DURAPULSE AC Drives – Selection Specifications

Supply: 230V, 1Ø, 50/60 Hz (<i>Constant</i> Torque; reactor installed <i>Load</i> Side)									
GS4 Model	HP	CT: 3Ø Output Amps (rms)*	Saturation Amps (rms)	Inductance (mH)		Max Motor kW	LR Model	Rated Amps	LR 3% Inductance
				3% Impedance	5% Impedance				
GS4-21P0	0.5	2.4	4.3	2.893	4.822	0.37	LR-20P5	2.4	4.2
GS4-22P0	0.75	3.2	5.8	2.170	3.617	0.55	LR-21P0	4.6	2.46
GS4-23P0	1	5.0	9.0	1.397	2.328	0.75	LR-21P0	4.6	2.46
GS4-25P0	2	8	14	0.868	1.447	1.5	LR-23P0	10.6	0.97
GS4-27P5	3	11	20	0.640	1.066	2.2	LR-23P0	10.6	0.97
GS4-2010	3	11	20	0.640	1.066	2.2	LR-23P0	10.6	0.97
GS4-2015	5	17	31	0.405	0.675	3.7	LR-25P0	16.7	0.626
GS4-2020	7.5	25	45	0.283	0.471	5.5	LR-27P5	24.2	0.434
GS4-2025	10	33	59	0.213	0.354	7.5	LR-2010	30.8	0.342
GS4-2030	10	33	59	0.213	0.354	7.5	LR-2010	30.8	0.342
GS4-2040	10	33	59	0.213	0.354	7.5	LR-2010	30.8	0.342
GS4-2050	10	33	59	0.213	0.354	7.5	LR-2010	30.8	0.342
GS4-2060	15	49	88	0.143	0.238	11	LR-2015	46.2	0.22
GS4-2075	20	65	117	0.108	0.179	15	LR-2020	59.4	0.172
GS4-2100	25	75	135	0.093	0.156	18.5	LR-2025	74.8	0.138

* Amperage ratings are 3-phase output reactor ratings when the drive is supplied with a single-phase input.

GS4 DURAPULSE Drives Accessories – Line/Load Reactors

Line/Load Reactors for GS4/DURAPULSE AC Drives – Selection Specifications

Supply: 230V, 3Ø, 50/60 Hz (Variable Torque; reactor installed <u>Line</u> or <u>Load</u> Side)									
GS4 Model	hp	VT: 3Ø Output Amps (rms)	Saturation Amps (rms)	Inductance (mH)		Max Motor kW	LR Model*	Rated Amps	LR 3% Inductance
				3% Impedance	5% Impedance				
GS4-21P0	1	5	8.7	2.536	4.226	0.75	LR-21P0	4.6	2.46
GS4-22P0	2	8	12.8	1.585	2.641	1.5	LR-23P0*	10.6	0.97
GS4-23P0	3	11	18	1.152	1.921	2.2	LR-23P0	10.6	0.97
GS4-25P0	5	17	29	0.746	1.244	3.7	LR-25P0	16.7	0.626
GS4-27P5	7.5	25	43	0.507	0.845	5.5	LR-27P5	24.2	0.434
GS4-2010	10	33	56	0.320	0.534	7.5	LR-2010	30.8	0.342
GS4-2015	15	49	85	0.216	0.359	11	LR-2015	46.2	0.22
GS4-2020	20	65	112	0.163	0.271	15	LR-2020	59.4	0.172
GS4-2025	25	75	128	0.169	0.282	18.5	LR-2025	74.8	0.138
GS4-2030	30	90	155	0.141	0.236	22	LR-2040*	114	0.0886
GS4-2040	40	120	205	0.106	0.176	30	LR-2040	114	0.0886
GS4-2050	50	146	250	0.087	0.146	37	LR-2050	143	0.0699
GS4-2060	60	180	308	0.070	0.117	45	not available*	169	0.0624
GS4-2075	75	215	367	0.059	0.098	55		211	0.0487
GS4-2100	100	255	436	0.049	0.082	75		273	0.0364

* Some GS4 drive and reactor combinations do not fit the typical "pattern" of having similar part numbers, due to some GS4 models having higher outputs than previous GS DURApulse drives.

Supply: 460V, 3Ø, 50/60 Hz (Variable Torque; reactor installed <u>Line</u> or <u>Load</u> Side)									
GS4 Model	hp	VT: 3Ø Output Amps (rms)	Saturation Amps (rms)	Inductance (mH)		Max Motor kW	LR Model	Rated Amps	LR 3% Inductance
				3% Impedance	5% Impedance				
GS4-41P0	1	3	5.2	8.102	13.503	0.75	LR-41P0	2.1	8.927
GS4-42P0	2	4	6.8	6.077	10.128	1.5	LR-42P0	3.4	5.790
GS4-43P0	3	6	10.3	4.050	6.751	2.2	LR-43P0	4.8	4.270
GS4-45P0	5	9	14.6	2.700	4.500	3.7	LR-45P0	7.6	2.770
GS4-47P5	7.5	12	20	2.025	3.375	5.5	LR-47P5	11	1.680
GS4-4010	10	18	31	1.174	1.957	7.5	LR-4010	14	1.290
GS4-4015	15	24	41	0.881	1.468	11	LR-4015	21	0.912
GS4-4020	20	32	54	0.660	1.101	15	LR-4020	27	0.694
GS4-4025	25	38	65	0.639	1.066	18.5	LR-4025	34	0.569
GS4-4030	30	45	77	0.541	0.901	22	LR-4030	40	0.469
GS4-4040	40	60	103	0.405	0.675	30	LR-4040	52	0.387
GS4-4050	50	73	124	0.334	0.556	37	LR-4050	65	0.295
GS4-4060	60	91	155	0.267	0.445	45	LR-4060	77	0.227
GS4-4075	75	110	189	0.221	0.368	55	LR-4075	96	0.196
GS4-4100	100	150	257	0.162	0.270	75	LR-4100	124	0.152
GS4-4125	125	180	308	0.135	0.224	90	LR-4125	156	0.117
GS4-4150	150	220	376	0.110	0.184	110	LR-4150	180	0.103
GS4-4175	175	260	445	0.098	0.163	132	LR-4200	240	0.0839
GS4-4200	215	310	531	0.078	0.130	160	LR-4250	302	0.0654
GS4-4250	250	370	634	0.066	0.109	185	LR-4250	302	0.0654
GS4-4300	300	460	787	0.054	0.090	220	LR-4300	361	0.0565

GS/DURAPULSE Drives Accessories – Line/Load Reactors

Line/Load Reactors for GS/DURAPULSE AC Drives – Additional Specifications

Line Reactors – LR Series – Additional Specifications							
Part Number	Price	Product Weight	Wire Range	Terminal Torque	Temperature Range		Environment
					Operating	Storage	
<u>LR-20P5</u>	Retired	4.0 lb [1.8 kg]	#12–#18 AWG	10 lb·in	-40 – 104 °F [-40 – 40 °C]	-40 – 149 °F [-40 – 65 °C]	NEMA: open IP00 no corrosive gases
<u>LR-21P0-1PH</u>	\$78.00	2.8 lb [1.3 kg]	#12–#18 AWG	10 lb·in			
<u>LR-22P0-1PH</u>	\$86.00	4.3 lb [2.0 kg]	#12–#18 AWG	20 lb·in			
<u>LR-23P0-1PH</u>	\$187.00	4.3 lb [2.0 kg]	#12–#18 AWG	20 lb·in			
<u>LR-23P0</u>	\$148.00	4.0 lb [1.8 kg]	#12–#18 AWG	10 lb·in			
<u>LR-25P0</u>	\$194.00	8.0 lb [3.6 kg]	#18–#4 AWG	20 lb·in			
<u>LR-27P5</u>	\$206.00	8.0 lb [3.6 kg]	#18–#4 AWG	20 lb·in			
<u>LR-2010</u>	\$242.00	12 lb [5.4 kg]	#18–#4 AWG	20 lb·in			
<u>LR-2015</u>	\$285.00	12 lb [5.4 kg]	#18–#4 AWG	20 lb·in			
<u>LR-2020</u>	\$312.00	12 lb [5.4 kg]	#18–#4 AWG	20 lb·in			
<u>LR-2025</u>	\$460.00	15 lb [6.8 kg]	#18–#4 AWG	#18–#16 AWG: 25 lb·in #14–#6 AWG: 30 lb·in #4 AWG: 35 lb·in			
<u>LR-2030</u>	\$490.00	33 lb [15 kg]	2/0 – #6AWG (AL or CU)	120			
<u>LR-2040</u>	\$574.00	33 lb [15 kg]	2/0 – #6AWG (AL or CU)	120			
<u>LR-2050</u>	\$670.00	36 lb [16 kg]	250kcmil – #6AWG (AL or CU)	275			
<u>LR-4010</u>	\$196.00	4.0 lb [1.8 kg]	#12–#18 AWG	10 lb·in			
<u>LR-4015</u>	\$237.00	8.0 lb [3.6 kg]	#18–#4 AWG	20 lb·in			
<u>LR-4020</u>	\$276.00	8.0 lb [3.6 kg]	#18–#4 AWG	20 lb·in			
<u>LR-4025</u>	\$290.00	10 lb [4.5 kg]	#18–#4 AWG	20 lb·in			
<u>LR-4030</u>	\$347.00	10 lb [4.5 kg]	#18–#4 AWG	20 lb·in			
<u>LR-4040</u>	\$382.00	15 lb [6.8 kg]	#18–#4 AWG	20 lb·in			
<u>LR-4050</u>	\$448.00	25 lb [11 kg]	#22–#4 AWG	#22–#16 AWG: 25 lb·in #14–#6 AWG: 30 lb·in #4 AWG: 35 lb·in			
<u>LR-4060</u>	\$462.00						
<u>LR-4075</u>	\$700.00	33 lb [15 kg]	2/0 – #6AWG (AL or CU)	120 lb·in			
<u>LR-4100</u>	\$840.00	46 lb [21 kg]	250kcmil – #6AWG (AL or CU)	275 lb·in			
<u>LR-4125</u>	\$962.00	46 lb [21 kg]	250kcmil – #6AWG (AL or CU)	275 lb·in			
<u>LR-4150</u>	\$1,114.00	46 lb [21 kg]	250kcmil – #6AWG (AL or CU)	275 lb·in			
<u>LR-4200</u>	\$1,238.00	74 lb [34 kg]	(1) 600kcmil – #4 AWG (2) 250kcmil – 1/0	500 lb·in			
<u>LR-4250</u>	\$1,403.00	74 lb [34 kg]	(2)* 350kcmil – #4 AWG (AL or CU)	275 lb·in			
<u>LR-4300</u>	\$1,546.00	74 lb [34 kg]	(2)* 350kcmil – #4 AWG (AL or CU)	275 lb·in			
<u>LR-5010</u>	\$202.00	4.0 lb [1.8 kg]	#12–#18 AWG	10 lb·in			

* LR-4250 & LR-4300 have dual-connector lugs, and will require multiple conductors per phase of the appropriate size to fit the lugs.

GS4 DURAPULSE Drives Accessories – Dynamic Braking Component Selection – GS4

Braking Component Selection for GS4 DURApulse AC Drives

GS4 AC Drive Braking Component Selection														
Drive Voltage	Motor Power		125% Braking Torque @ 10% Duty Cycle**							Max Braking Torque				
			AC Drive Model # GS4-	Braking Unit		Braking Resistor		Total Brake Current (A)	Min Resistor Value (Ω)	Max Total Brake Current (A)	Peak Power (kW)			
	Quantity	Part # GS-		Quantity	Part # GS-BR-	Brake Torque (kg·m)								
230V	1	0.7	21P0	0	n/a	1	080W200	0.5	1.9	63.3	6	2.3		
	2	1.5	22P0			1	200W091	1.0	4.2	47.5	8	3.0		
	3	2.2	23P0			1	300W070	1.5	5.4	38.0	10	3.8		
	5	3.7	25P0			1	400W040	2.5	9.5	19.0	20	7.6		
	7.5	5.5	27P5			1	1K0W020	3.7	19	14.6	26	9.9		
	10	7.5	2010			1	1K0W020	5.1	19	14.6	26	9.9		
	15	11	2015			1	1K5W013	7.5	29	12.6	28	10.6		
	20	15	2020			2	1K0W4P3	10.2	44	8.3	46	17.5		
	25	18	2025			2	1K0W4P3	12.2	44	8.3	46	17.5		
	30	22	2030			2	1K5W3P3	14.9	58	5.8	66	25.1		
	40	30	2040			2	1DBU	4	1K0W5P1	20.3	75*	4.8*	80*	30.4*
	50	37	2050			2	2DBU	4	1K2W3P9	25.1	97*	3.2*	120*	45.6*
	60	45	2060			2	2DBU	4	1K5W3P3	30.5	118*	3.2*	120*	45.6*
	75	55	2075			3	2DBU	6	1K2W3P9	37.2	145*	2.1*	180*	68.4*
100	75	2100	4	2DBU	8	1K2W3P9	50.8	190*	1.6*	240*	91.2*			
460V	1	0.7	41P0	0	n/a	1	080W750	0.5	1	190	4	3.0		
	2	1.5	42P0			1	200W360	1	2.1	126.7	6	4.6		
	3	2.2	43P0			1	300W250	1.5	3	108.6	7	5.3		
	5	3.7	45P0			1	400W150	2.5	5.1	84.4	9	6.8		
	7.5	5.5	47P5			1	1K0W075	3.7	10.2	54.3	14	10.6		
	10	7.5	4010			1	1K0W075	5.1	10.2	47.5	16	12.2		
	15	11	4015			1	1K5W043	7.5	17.6	42.2	18	13.7		
	20	15	4020			2	1K0W016	10.2	24	26.2	29	22.0		
	25	18	4025			2	1K0W016	12.2	24	23.0	33	25.1		
	30	22	4030			2	1K5W013	14.9	29	23.0	33	25.1		
	40	30	4040			4	1K0W016	20.3	47.5	14.1	54	41.0		
	50	40	4050			1	4DBU	4	1K2W015	25.1	50*	12.7*	60*	45.6*
	60	45	4060			1	4DBU	4	1K5W013	30.5	59*	12.7*	60*	45.6*
	75	55	4075			2	3DBU	8	1K0W5P1	37.2	76*	9.5*	80*	60.8*
	100	75	4100	2	4DBU	8	1K2W015	50.8	100*	6.3*	120*	91.2*		
	125	90	4125	2	4DBU	8	1K5W013	60.9	117*	6.3*	120*	91.2*		
	150	110	4150	1	5DBU	10	1K2W015	74.5	126*	6.0*	126*	95.8*		
	175	132	4175	1	6DBU	12	1K5W012	89.4	190*	4.0*	190*	144.4*		
	200	160	4200	1	6DBU	12	1K5W012	108.3	190*	4.0*	190*	144.4*		
	250	185	4250	1	7DBU	14	1K5W012	125.3	225*	3.4*	225*	172.1*		
300	220	4300	2	5DBU	20	1K2W015	148.9	252*	3.0*	252*	190.5*			

* These values are per individual DBU, as seen between DBU terminals B1 and B2.
 ** 10% Duty Cycle with maximum ON (braking) time of 10 seconds.

GS/DURAPULSE Drives Accessories – Braking Unit Specifications for GS3 & GS4 DURAPULSE AC Drives

Braking Units for GS3 & GS4 DURApulse AC Drives

Overview

Braking units are applied to absorb the motor regeneration energy when the three-phase induction motor stops by deceleration.

GS-xDBU braking units, used with GS series braking resistors, provide optimum braking performance.



Note: Braking units are available ONLY for DURApulse drives.



WARNING: TO AVOID INJURY OR MECHANICAL DAMAGE, PLEASE REFER TO USER MANUAL GS-DB_UMP BEFORE WIRING.



Dynamic Braking Unit Specifications – for GS3 & GS4 DURAPULSE AC Drives							
Braking Unit Part Number	GS-1DBU	GS-2DBU	GS-3DBU	GS-4DBU	GS-5DBU	GS-6DBU	GS-7DBU
Price	\$269.00	\$269.00	\$364.00	\$364.00	\$1,517.00	\$1,578.00	\$1,732.00
Nominal Voltage (VAC)	230			460			
Max Motor Capacity (hp/[kW])	20 [15]	30 [22]	40 [30]	60 [45]	150 [110]	200 [160]	250 [185]
Output Rating	Max Discharge Current (A) @ 10% Duty Cycle*	40	60	40	60	126	225
	Continuous Discharge Current (A)	15	20	15	18	45	100
	Braking Startup Voltage (VDC)	330/345/360/ 380/400/415 ±3V		600/690/720/ 760/800/830 ±6V		618/642/667/690/ 725/750 ±6V	
	Maximum On-Time (s)	10					
Input DC Voltage (VDC)	200–400		400–800		400–750		
Min Equivalent Resistor for Each Braking Unit (Ω)	10	6.8	20	13.6	6	4	3.4
Protection	Power CHARGE Lamp/LED	Comes ON until DC bus voltage (+P – -N) drops below 50VDC			Comes ON when DC bus voltage (DC+ – DC-) rises above 300VDC. Goes OFF when DC bus voltage (DC+ – DC-) drops below 100VDC.		
	Braking ACT Lamp/LED	ON during braking					
	Fault ERR Lamp	ON if a fault has occurred				n/a	
	Overcurrent Level LED (A)	n/a			190	290	340
	Overheat LED	n/a			Comes ON > 176°F [80°C]; Goes OFF < 149°F [65°C]		
	Heat Sink Overheat Temperature	203°F [95°C]			n/a		
Alarm Output Relay Contact	5A @ 120VAC/28VDC (RA, RB, RC)				3A @ 250VAC/28VDC (RA, RC)		
Environment	Installation Location	indoor (no corrosive gases; no metallic dust)					
	Operating Temperature	14°F to 122 °F [-10 to +50 °C]					
	Storage Temperature	-4 to +140 °F [-20 to +60 °C]					
	Humidity	less than 90% RH, non-condensing					
	Vibration	9.8 m/s ² [1G] under 20Hz ; 2m/s ² [0.2G] at 20–50 Hz					
Mechanical Configuration	IP50 wall-mount enclosed				IP10 wall-mount enclosed		

* 10% Duty Cycle with maximum ON (braking) time of 10 seconds

GS/DURAPULSE Accessories – Braking Resistors for AC Drives

Overview

Braking resistors are used to increase the control torque of the AC drive, for frequently repeated ON-OFF cycles of the AC drive, or for decelerating a load with large inertia.



For GS3 Durapulse drive models 20 hp and above, a dynamic braking unit must be used in conjunction with the braking resistor, as shown in the Durapulse AC drive Braking Units table.

For additional information, please refer to the dynamic braking manual, GS-DB_UMP.



GS-25P0-BR




GS-27P5-BR




GS-2020-BR-ENC



**GS-2020-BR-ENC
without Cover**

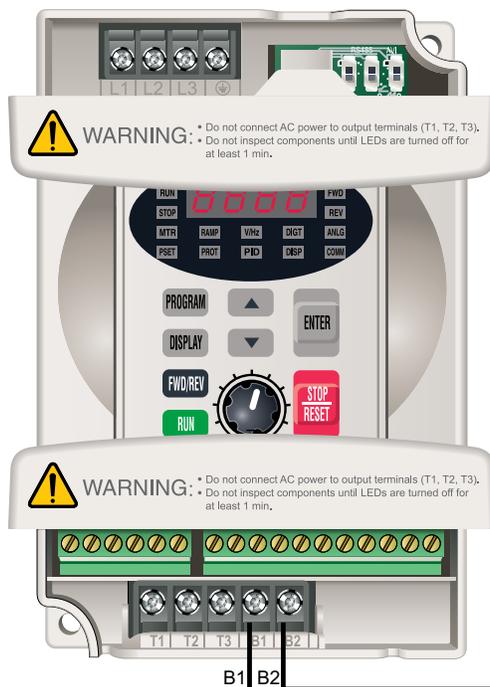

GS2 braking resistor connection;
Refer to user Dynamic Braking user manual GS-DB_UMP for DURAPULSE resistor connection information.



GS/DURAPULSE Drives Accessories –

Braking Resistor Specs for AC Drives

Braking Resistor Specifications				
Part Number	Price	Power (W)	Resistance (Ω)	Type
<u>GS-20P5-BR</u>	\$17.00	80	200	open
<u>GS-21P0-BR</u>	\$17.00	80	200	
<u>GS-22P0-BR</u>	\$41.50	300	100	
<u>GS-23P0-BR</u>	\$41.50	300	70	
<u>GS-25P0-BR</u>	\$49.50	400	40	
<u>GS-27P5-BR</u>	\$49.50	500	30	
<u>GS-2010-BR-ENC</u>	\$344.00	1000	20	enclosed
<u>GS-2015-BR-ENC</u>	\$597.00	2400	13.6	
<u>GS-2020-BR-ENC</u>	\$662.00	3000	10	
<u>GS-2025-BR-ENC</u>	\$809.00	4800	8	
<u>GS-2030-BR-ENC</u>	\$795.00	4800	6.8	
<u>GS-2040-BR-ENC</u>	\$662.00	3000	10	
<u>GS-2050-BR-ENC</u>	\$809.00	4800	8	open
<u>GS-41P0-BR</u>	\$26.00	80	750	
<u>GS-42P0-BR</u>	\$58.00	300	400	
<u>GS-43P0-BR</u>	\$58.00	300	250	
<u>GS-45P0-BR</u>	\$70.00	400	150	
<u>GS-47P5-BR</u>	\$70.00	500	100	
<u>GS-4010-BR</u>	\$165.00	1000	75	enclosed
<u>GS-4015-BR-ENC</u>	\$344.00	1000	50	
<u>GS-4020-BR-ENC</u>	\$427.00	1500	40	
<u>GS-4025-BR-ENC</u>	\$1,017.00	4800	32	
<u>GS-4030-BR-ENC</u>	\$1,017.00	4800	27.2	
<u>GS-4040-BR-ENC</u>	\$1,017.00	6000	20	
<u>GS-4050-BR-ENC</u>	\$1,198.00	9600	16	
<u>GS-4060-BR-ENC</u>	\$1,198.00	9600	13.6	
<u>GS-4075-BR-ENC</u>	\$1,017.00	6000	20	
<u>GS-4100-BR-ENC</u>	\$1,198.00	9600	13.6	
<u>GS-BR-080W200</u>	\$17.00	80	200	open
<u>GS-BR-080W750</u>	\$17.00	80	750	
<u>GS-BR-200W091</u>	\$34.50	200	91	
<u>GS-BR-200W360</u>	\$34.50	200	360	
<u>GS-BR-300W070</u>	\$41.50	300	70	
<u>GS-BR-300W250</u>	\$39.00	300	250	
<u>GS-BR-300W400</u>	\$32.00	300	400	
<u>GS-BR-400W040</u>	\$49.50	400	40	
<u>GS-BR-400W150</u>	\$46.50	400	150	
<u>GS-BR-500W100</u>	\$38.50	500	100	
<u>GS-BR-750W140</u>	\$68.00	750	140	
<u>GS-BR-1K0W4P3</u>	\$110.00	1000	4.3	
<u>GS-BR-1K0W5P1</u>	\$110.00	1000	5.1	
<u>GS-BR-1K0W016</u>	\$110.00	1000	16	
<u>GS-BR-1K0W020</u>	\$110.00	1000	20	
<u>GS-BR-1K0W075</u>	\$110.00	1000	75	
<u>GS-BR-1K2W3P9</u>	\$121.00	1200	3.9	
<u>GS-BR-1K2W015</u>	\$121.00	1200	15	
<u>GS-BR-1K5W3P3</u>	\$144.00	1500	3.3	
<u>GS-BR-1K5W012</u>	\$144.00	1500	12	
<u>GS-BR-1K5W013</u>	\$144.00	1500	13	
<u>GS-BR-1K5W043</u>	\$144.00	1500	43	

GS4 DURAPULSE Accessories – EMI Filters Selection

Selection (GS4)

The optional EMI Filters listed here are available for use with the GS4 drive. Selection of these accessories is application-specific and may improve drive performance. Additional information regarding filter installation and operation is available in the AutomationDirect white paper, "Applied EMI/RFI Techniques," downloadable from AutomationDirect.com.

EMI Filters Selection for GS4 AC Drives					
Model*	Description	EMI Filter **	Max Power kW [max/ph]	Max Torque kg-cm [lb-in]	SCCR Rating (kA)
GS4-21P0	230V 1ph/3ph 1.0 hp	KMF325A	20.8 [6]	17.7 [2]	5
GS4-22P0	230V 1ph/3ph 2.0 hp				
GS4-23P0	230V 1ph/3ph 3.0 hp				
GS4-25P0	230V 1ph/3ph 5.0 hp				
GS4-27P5	230V 1ph/3ph 7.5 hp	KMF370A	58.1 [16.8]	44.2 [5]	5
GS4-2010	230V 1ph/3ph 10hp				
GS4-2015	230V 1ph/3ph 15hp				
GS4-4025	460V 3ph 25hp				
GS4-4030	460V 3ph 30hp				
GS4-4040	460V 3ph 40hp				
GS4-2020	230V 3ph 20hp	KMF3100A	83 [24]	44.2 [5]	10
GS4-2025	230V 3ph 25hp				
GS4-2030	230V 3ph 30hp				
GS4-41P0	460V 3ph 1.0 hp	KMF318A	14.9 [4.3]	17.7 [2]	5
GS4-42P0	460V 3ph 2.0 hp				
GS4-43P0	460V 3ph 3.0 hp				
GS4-45P0	460V 3ph 5.0 hp				
GS4-47P5	460V 3ph 7.5 hp				
GS4-4010	460V 3ph 10hp				
GS4-4015	460V 3ph 15hp	KMF350A	41.5 [12]	44.2 [5]	10
GS4-4020	460V 3ph 20hp				
GS4-4050	460V 3ph 50hp	MIF375	62.3 [18]	53.1 [6]	10
GS4-2040	230V 3ph 40hp	MIF3150	124.6 [36]	177 [20]	10
GS4-2050	230V 3ph 50hp				
GS4-4060	460V 3ph 60hp				
GS4-4075	460V 3ph 75hp				
GS4-4100	460V 3ph 100hp				
GS4-2060	230V 3ph 60hp				
GS4-2075	230V 3ph 75hp	MIF3400B	332.2 [96]	265.5 [30]	30
GS4-2100	230V 3ph 100hp				
GS4-4125	460V 3ph 125hp				
GS4-4150	460V 3ph 150hp				
GS4-4175	460V 3ph 175hp				
GS4-4200	460V 3ph 200hp				
GS4-4250	460V 3ph 250hp	MIF3800 & Qty. 3 TOR254	664.3 [192]	265.5 [30]	30
GS4-4300	460V 3ph 300hp				

* EMI filter selections for GS4-2xxx models are the same whether that particular model is supplied 1-Phase or 3-Phase 230VAC.

** Part numbers are Roxburgh EMI Filters available from AutomationDirect at the web link embedded with each part number listed above.

GS4 DURAPULSE Accessories – Fusing

Fuse Selection for GS4 AC Drives

The fuses shown in the table below are available from AutomationDirect. Further information, including dimensional information, is available at AutomationDirect.com.

Fuse Specification Chart GS4 DURAPULSE Drives														
Drive Model	For Three-Phase Input Power						For Single-Phase Input Power							
	HP	Input Power			Input Fuse ***			HP	Input Power			Input Fuse ***		
		Ø	Volts	GS4 Amps	Fuse Amps	Fast Acting Class T	Edison Class J*		Ø	Volts	GS4 Amps	Fuse Amps	Fast Acting Class T	Edison Class J*
GS4-21P0	1	3	230	6.4	10	TJN10	JHL10	0.5	1	230	6.4	10	TJN10	JHL10
GS4-22P0	2	3	230	12	15	TJN15	JHL15	0.75	1	230	9.7	15	TJN15	JHL15
GS4-23P0	3	3	230	16	25	TJN25	JHL25	1	1	230	15	20	TJN20	JHL20
GS4-25P0	5	3	230	20	35	TJN35	JHL35	2	1	230	20	30	TJN30	JHL30
GS4-27P5	7.5	3	230	28	50	TJN50	JHL50	3	1	230	26	40	TJN40	JHL40
GS4-2010	10	3	230	36	70	TJN70	JHL70	3	1	230	26	40	TJN40	JHL40
GS4-2015	15	3	230	52	100	TJN100	JHL100	5	1	230	40	70	TJN70	JHL70
GS4-2020	20	3	230	72	125	TJN125	JHL125	7.5	1	230	58	100	TJN100	JHL100
GS4-2025	25	3	230	83	150	TJN150	JHL150	10	1	230	76	125	TJN125	JHL125
GS4-2030	30	3	230	99	175	TJN175	JHL175	10	1	230	76	125	TJN125	JHL125
GS4-2040**	40	3	230	124	175	TJN175	JHL175	10	1	230	63	90	TJN90	JHL90
GS4-2050**	50	3	230	143	200	TJN200	JHL200	10	1	230	63	90	TJN90	JHL90
GS4-2060	60	3	230	171	250	TJN250	JHL250	15	1	230	94	150	TJN150	JHL150
GS4-2075	75	3	230	206	300	TJN300	JHL300	20	1	230	124	175	TJN175	JHL175
GS4-2100	100	3	230	245	350	TJN350	JHL350	25	1	230	143	200	TJN200	JHL200
GS4-41P0	1	3	460	4.3	6	TJS6	JHL6	single-phase input power not applicable for 460V						
GS4-42P0	2	3	460	5.9	10	TJS10	JHL10							
GS4-43P0	3	3	460	8.7	15	TJS15	JHL15							
GS4-45P0	5	3	460	14	20	TJS20	JHL20							
GS4-47P5	7.5	3	460	17	25	TJS25	JHL25							
GS4-4010	10	3	460	20	35	TJS35	JHL35							
GS4-4015	15	3	460	26	45	TJS45	JHL45							
GS4-4020	20	3	460	35	60	TJS60	JHL60							
GS4-4025	25	3	460	40	70	TJS70	JHL70							
GS4-4030	30	3	460	47	90	TJS90	JHL90							
GS4-4040**	40	3	460	63	125	TJS100	JHL100							
GS4-4050	50	3	460	74	100	TJS110	JHL110							
GS4-4060	60	3	460	101	125	TJS150	JHL150							
GS4-4075	75	3	460	114	150	TJS150	JHL150							
GS4-4100	100	3	460	157	200	TJS200	JHL200							
GS4-4125	125	3	460	167	250	TJS250	JHL250							
GS4-4150	150	3	460	207	300	TJS300	JHL300							
GS4-4175	175	3	460	240	350	TJS350	JHL350							
GS4-4200	200	3	460	300	450	TJS450	JHL450							
GS4-4250	250	3	460	380	500	TJS500	JHL500							
–	–						Fast Acting Current Limiting Class L							
GS4-4300	300	3	460	400	700	LCU700								

* High-speed Class J

** Includes DC choke

*** The fuses listed above are available from AutomationDirect.com. (Individual web links are associated with each part number listed above.)