




Model: 116158-00

SPECIAL FEATURES

- Suitable for 36 volt DC operation
- Provision for grounding
- UL Recognized, category PRGY2 (E47185)
- Skeleton-frame design
- Fan shell inlet tube
- Epoxy painted fan case
- Patented air seal bearing construction. U.S. Patent #4,088,424
- The Lamb Electric vacuum motor line offers a wide range of performance levels to meet design needs.

***Model 116158-00 only features an inlet tube 1.875" x 1.0" long**

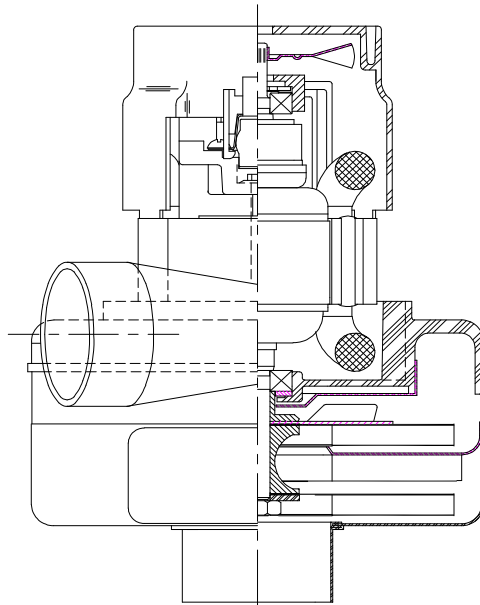

DESCRIPTION


- Two stage
- 36 volts
- 5.7"/145 mm diameter
- Double ball bearings
- Single speed
- Tangential bypass discharge
- Thermoset fan end bracket
- Aluminum commutator bracket

DESIGN APPLICATION


- Equipment operating in environments requiring separation of working air from motor ventilating air
- Designed to handle clean, dry, filtered air only

TYPICAL MOTOR PERFORMANCE.*

(At 36 volts, 60Hz, test data is corrected to standard conditions of 29.92 Hg, 68° F.)

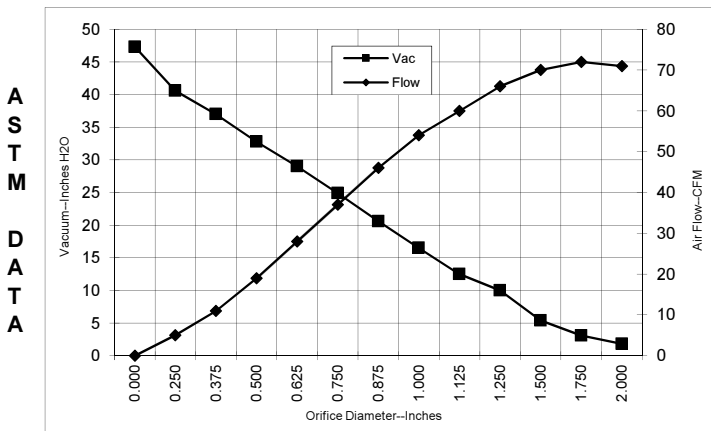

Orifice (mm)	Amps	Watts (In)	RPM	Vac (in. H2O)	Flow (CFM)	Air Watts
2.000	10.5	387	13200	1.8	71.0	15
1.750	10.6	391	13200	3.1	72.0	26
1.500	10.6	391	13100	5.4	70.0	44
1.250	10.8	398	13000	10.0	66.0	78
1.125	10.8	398	13000	12.5	60.0	88
1.000	10.8	398	13000	16.5	54.0	105
0.875	10.6	391	13100	20.6	46.0	113
0.750	10.3	380	13350	24.9	37.0	110
0.625	9.7	358	13700	29.0	28.0	96
0.500	9.1	335	14250	32.8	19.0	74
0.375	8.6	317	14850	37.0	11.0	50
0.250	8.0	295	15400	40.6	5.0	25
0.000	7.6	280	16200	47.3	0.0	0

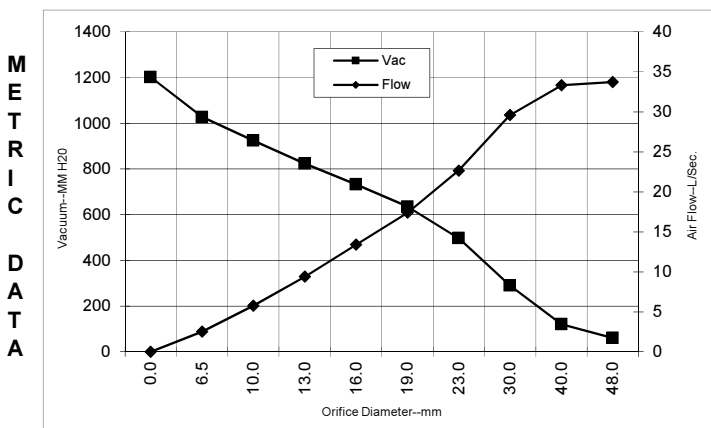

Orifice (mm)	Amps	Watts (In)	RPM	Vac (mm H2O)	Flow (L/Sec)	Air Watts
48.0	10.5	389	13200	60	33.7	20
40.0	10.6	391	13130	120	33.3	39
30.0	10.8	398	13000	289	29.6	84
23.0	10.7	393	13075	497	22.7	111
19.0	10.3	380	13357	635	17.4	110
16.0	9.7	359	13686	732	13.4	97
13.0	9.2	337	14195	823	9.4	76
10.0	8.7	320	14760	924	5.8	54
6.5	8.0	296	15373	1027	2.5	26
0.0	7.6	280	16200	1201	0.0	0

Note: Metric performance data is calculated from the ASTM data above.

* Data represents performance of a typical motor sampled from a large production quantity. Individual motor data may vary due to normal manufacturing variations.

Test Specs:	36 volts	Minimum Sealed Vacuum:	43.0"	ORIFICE:	7/8 "	Minimum Vacuum:	17.0"	Maximum Watts:	480
--------------------	-----------------	-------------------------------	--------------	-----------------	--------------	------------------------	--------------	-----------------------	------------

