

EFD/EFDB and EDS Series Factory Sealed Control Stations

Explosionproof, Dust-Ignitionproof

NEC/CEC:

Class I, Division 1 and 2, Groups B*, C, D

Class II, Division 1 and 2, Groups E, F, G

Class III

NEMA 3, 7CD, 9EFG

Standard Finishes

- EFD/EFDB control stations: body, triple-coat—(1) zinc electroplate, (2) chromate, and (3) epoxy powder coat
- SPBB push button, SPLN/SPLS pilot light and SSBA selector switch: natural finish
- EDS control stations: body and cover: triple-coat—(1) zinc electroplate, (2) chromate, and (3) epoxy powder coat sealing chamber, natural finish

Options

- 1- or 2-gang copperfree (4/10 of 1% max.) aluminum bodies and covers available. Add suffix — **A**.
- Three position selector switches with modified operation.
 - Momentary contact right position, spring return to center, maintained contact left position. Add suffix — **SRC**.
 - Momentary contact left position, spring return to center, maintained contact right position. Add suffix — **SLC**.
 - Alternate contacts add suffix — **ALT**.
- EFD/EFDB selector switch lockout locks two or three position handle in any position. Add suffix — **LD**.
- Push button front operated mushroom head (momentary contact): Order by suffixes for desired color as follows:
 - Red — **NMRBRE**
 - Green — **NMRBGR**
 - Black — **NMRBBL**
- EFD/EFDB pilot light jewel/guard assembly. Order by suffixes if color desired is other than red, as follows:
 - Amber — **JGBA**
 - Blue — **JGBB**
 - Clear — **JGBC**
 - Green — **JGBG**
 - Opal — **JGBO**
- For colored LED jewel/guard assembly, order by suffixes:
 - Red — **LEDR**
 - Green — **LEDG**
 - Amber — **LEDA**
- EFD/EFDB pilot light transformers for single pilot light per gang. Order by suffix:

Primary Voltage	Lamp Voltage	Suffix
220	120	-TR-2
277	120	-TR-3
440	120	-TR-4
550	120	-TR-5

- EFD and EDS units may be supplied with brazed hubs as 3-, 4-, and 5-gang in a variety of hub configurations. See Ordering Information page for how to order these and other "custom" units by adding suffixes to mounting body catalog numbers.
- Securing Rod for EFD/EFDB Push Button Lockout Guard. Add suffix — **SR**.
- NPBRKT** Nameplate Mounting Bracket to make circuit description/identification easy.
 - Pre-drilled holes in bottom of bracket allow direct mounting to control stations with existing cover bolts.
 - Pre-drilled holes in middle of bracket allow mounting of customer's circuit identification nameplate; epoxy glue may also be used for mounting (phenolic nameplate not included).
 - Bracket eliminates costly field installation of drilling and tapping to accommodate circuit identification nameplate.
 - Brackets fit side-by-side on 2-, 3- and 4-gang boxes and 3-devices.


NEC Certifications and Compliances

- UL Standards: UL 508, UL 698, UL 1203
- cULus Listed: E10449, E81751

Related Products

- For Hazardous Location Photocontrols, see *Lighting Section*.

Illustrated Features

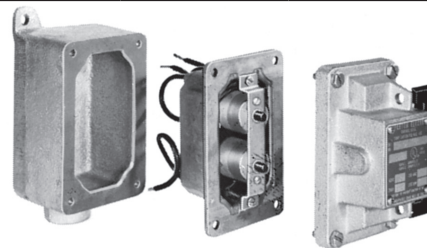

EDS factory sealed rocker arm push button control station — shows separate sealing chamber and device construction. Rocker arm has holes for lock.




Securing Rod for EFD/EFDB Push Button Lockout Guard — available as an optional item as catalog number NBL-SR (single guard only) or add Suffix — SR to push button catalog number. Lockout Guard, furnished as standard with the EFD/EFDB push button, may also be padlocked.



SPBB factory sealed push button used in EFD/EFDB Series — standard type and unit with dust cap.

SPBB Design Features

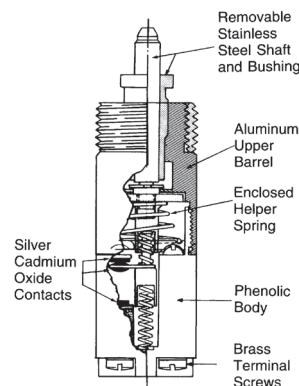

♦ Select items suitable for Class I, Division 1 and 2, Groups B, C and D; Class II, Groups E, F and G and Class III. See product selection pages for suitable items.

EFD/EFDB and EDS Series Factory Sealed Control Stations

Explosionproof, Dust-Ignitionproof

NEC/CEC:


Class I, Division 1 and 2, Groups B $\diamond$, C, D

Class II, Division 1 and 2, Groups E, F, G

Class III

NEMA 3, 7CD, 9EFG

Catalog Numbering Guide

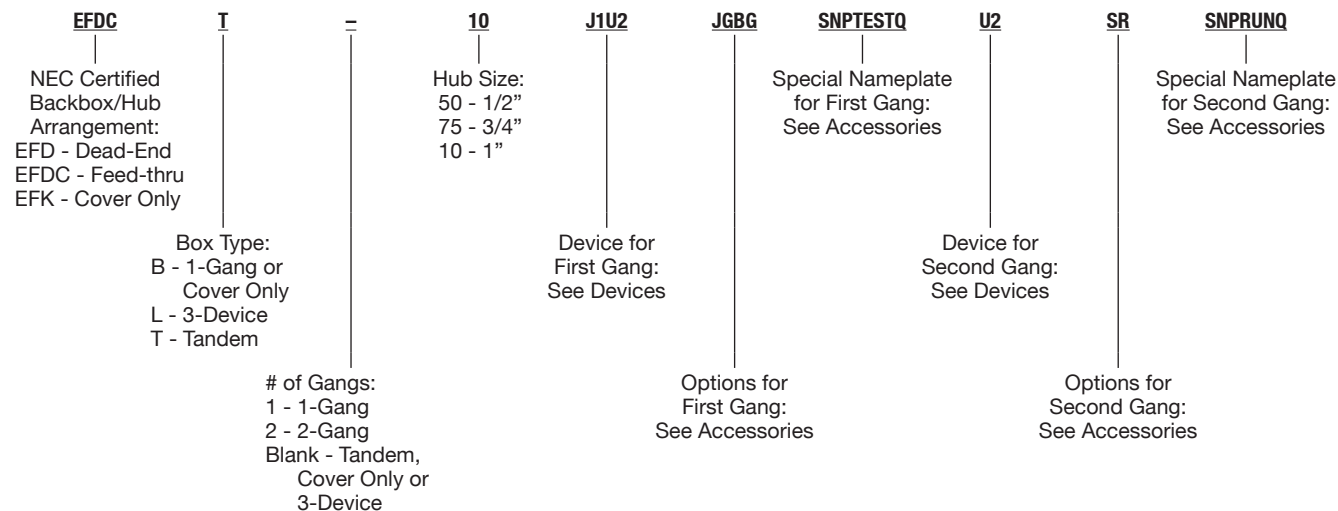

Full Catalog # EFDCT10-J1U2-JGBG-SNPTESTQ-U2-SNPTESTQ-SNPRUNQ

Feed-Thru Tandem Box with 1" Hubs.

In Gang #1: 2 Momentary Push Buttons and a Green Pilot Light.

In Gang #2: 2 Momentary Push Buttons with One Securing Rod.

With Special "Test" and "Run" Push Button Nameplates.

Options

Options Description	Suffix
Momentary Push Button Securing Rod	SR
Selector Switch Lockout	LD
Spring Return From Right Selector Switch (3 Positions Only)	SRC
Spring Return From Left Selector Switch (3 Positions Only)	SLC
Alternate Contacts Selector Switch	ALT
Change One Red Lens to Green Lens	JGBG
Change One Red Lens to Opal Lens	JGBO
Change One Red Lens to Amber Lens	JGBA
Change One Red Lens to Blue Lens	JGBB
Change One Red Lens to Clear Lens	JGBC
Add 220/120 Vac Transformer (J1 Device Only)	TR2
Add 277/120 Vac Transformer (J1 Device Only)	TR3
Add 440/120 Vac Transformer (J1 Device Only)	TR4
Add 550/120 Vac Transformer (J1 Device Only)	TR5
Change One Red Pilot to Red LED	LEDR
Change One Red Lens to Green LED	LEDG
Change One Red Lens to Amber LED	LEDA
Add Red Mushroom Head to Momentary Push Button	NMRBRE
Add Black Mushroom Head to Momentary Push Button	NMRBBL
Add Green Mushroom Head to Momentary Push Button	NMRBGR
Locking Guard for Maintained Push Button	SMPBLG

$\diamond$ Select items suitable for Class I, Division 1 and 2, Groups B, C and D; Class II, Groups E, F and G and Class III. See product selection pages for suitable items.

EFD/EFDB and EDS Series Factory Sealed Control Stations

Explosionproof, Dust-Ignitionproof

NEC/CEC:

Class I, Division 1 and 2, Groups B⁺, C, D

Class II, Division 1 and 2, Groups E, F, G

Class III

NEMA 3, 7CD, 9EFG

Devices			
Device Description	Available in 1-G, 2-G, Tandem	Available in 3-Device	Suffix
One Pilot Light (Red Standard)	Y		J1
Two Pilot Lights	Y		J2
One Pilot Light and One Momentary Push Button	Y		J1U1
One Pilot Light and Two Momentary Push Buttons	Y	Y	J1U2
One Pilot Light and One Maintained Push Button	Y		J1UM1
One Pilot Light and One Dust Cap Push Button	Y		J1DU1
One Pilot Light and One 12 Selector Switch (2 Position, 2 Circuit)	Y		J112
One Pilot Light and One 35 Selector Switch (2 Position, 4 Circuit)	Y		J135
One Pilot Light and One 102 Selector Switch (3 Position, 2 Circuit)	Y		J1102
One Pilot Light and One 345 Selector Switch (3 Position, 4 Circuit)	Y		J1345
One Monetary Push Button	Y		U1
Two Monetary Push Buttons	Y		U2
Two Side-By-Side Momentary Push Buttons	Y		U2DBL
Three Monetary Push Buttons	Y	Y	U3
One Momentary Push Button and One Maintained Push Button	Y		U1UM1
One Momentary Push Button and One Dust Cap Push Button	Y		U1DU1
One Momentary Push Button and One 12 Selector Switch (2 Position, 2 Circuit)	Y		U112
One Momentary Push Button and One 35 Selector Switch (2 Position, 4 Circuit)	Y		U135
One Momentary Push Button and One 102 Selector Switch (3 Position, 2 Circuit)	Y		U1102
One Momentary Push Button and One 345 Selector Switch (3 Position, 4 Circuit)	Y		U1345
One Maintained Push Button (Mushroom Head - Red)	Y		UM1
Two Maintained Push Buttons	Y		UM2
One Maintained and One Dust Cap Push Button	Y		UM1DU1
One Maintained Push Button and One 12 Selector Switch (2 Position, 2 Circuit)	Y		UM112
One Maintained Push Button and One 35 Selector Switch (2 Position, 4 Circuit)	Y		UM135
One Maintained Push Button and One 102 Selector Switch (3 Position, 2 Circuit)	Y		UM1102
One Maintained Push Button and One 345 Selector Switch (3 Position, 4 Circuit)	Y		UM1345
One Dust Cap Push Button	Y		DU1
Two Dust Cap Push Buttons	Y		DU2
One Dust Cap and One 12 Selector Switch (2 Position, 2 Circuit)	Y		DU112
One Dust Cap and One 35 Selector Switch (2 Position, 4 Circuit)	Y		DU135
One Dust Cap and One 102 Selector Switch (3 Position, 2 Circuit)	Y		DU1102
One Dust Cap and One 345 Selector Switch (3 Position, 4 Circuit)	Y		DU1345
One 12 Selector Switch (2 Position, 2 Circuit)	Y		12
One 35 Selector Switch (2 Position, 4 Circuit)	Y		35
One 102 Selector Switch (3 Position, 2 Circuit)	Y		102
One 345 Selector Switch (3 Position, 4 Circuit)	Y		345
120 Vac Photocell	Y		PC120
277 Vac Photocell	Y		PC277
Three Dust Cap Push Buttons		Y	DU3
One Momentary and Two Maintained Push Buttons		Y	U1UM2
Two Momentary and One Maintained Push Buttons	Y	Y	U2UM1
Three Maintained Push Buttons		Y	UM3
Three Pilot Lights		Y	J3
Two Pilot Lights and One Momentary Push Button		Y	J2U1
One Pilot Light and Two Dust Cap Push Buttons		Y	J1DU2
Two Pilot Lights and One Dust Cap Push Button		Y	J2DU1
One Pilot Light and Two Maintained Push Buttons		Y	J1UM2
Two Pilot Lights and One Maintained Push Button		Y	J2UM1

♦ Select items suitable for Class I, Division 1 and 2, Groups B, C and D; Class II, Groups E, F and G and Class III. See product selection pages for suitable items.


EFD/EFDB Series Factory Sealed Control Stations

Pilot Lights. Explosionproof, Dust-Ignitionproof

Pilot Light Furnished with 6 Watt, 120 Vac 6S6 Lamp and Red Jewel.* Furnished with Internal Ground Screw.

NEC/CEC:

Class I, Division 1, Groups B*, C, D
Class I, Division 2, Groups B, C, D
Class II, Division 1 and 2, Groups E, F, G
Class III
NEMA 3, 7CD, 9EFG

		Hub Size (Inches)	Description		Catalog Number	
					Dead-End	Feed-Thru
1-Gang ♦ ③						
	1/2	One Pilot Light		EFDB150-J1	EFDCB150-J1	
	3/4			EFDB175-J1	EFDCB175-J1	
	1			EFDB110-J1	EFDCB110-J1	
	1/2	Two Pilot Lights		EFDB150-J2	EFDCB150-J2	
	3/4			EFDB175-J2	EFDCB175-J2	
	1			EFDB110-J2	EFDCB110-J2	
2-Gang ①						
	1/2	Two Pilot Lights		EFD250-J1	EFDC250-J1	
	3/4			EFD275-J1	EFDC275-J1	
	1			EFD210-J1	EFDC210-J1	
	1/2	Four Pilot Lights		EFD250-J2	EFDC250-J2	
	3/4			EFD275-J2	EFDC275-J2	
	1			EFD210-J2	EFDC210-J2	
3-Device ②						
	1/2	Three Pilot Lights		EFDL50-J3	EFDC150-J3	
	3/4			EFDL75-J3	EFDC175-J3	
	1			EFDL10-J3	EFDC110-J3	
2-Gang Tandem ②						
	1/2	Two Pilot Lights		EFDT50-J1	EFDC250-J1	
	3/4			EFDT75-J1	EFDC275-J1	
	1			EFDT10-J1	EFDC210-J1	
	1/2	Four Pilot Lights		EFDT50-J2	EFDC250-J2	
	3/4			EFDT75-J2	EFDC275-J2	
	1			EFDT10-J2	EFDC210-J2	
Two Pilot Lights		Four Pilot Lights				

① Malleable iron body and aluminum cover. For aluminum body, add suffix —A.

② Aluminum body not available. For tandem bodies, external seals must be installed within 1.5 meters (5 feet) of each conduit entrance for Class I, Groups C and D.

③ Other colored jewels, pilot lights and LED's listed under accessories and parts.

♦ Shaded area indicates items suitable for Class I, Groups B, C and D; Class II, Groups E, F, and G; and Class III.
For Class I, Division 1, Group B, external seals must be installed at each conduit entrance.


APPLETON™

CONTROLS: NEC/CEC EXPLOSIONPROOF CONTROL STATIONS AND SWITCHES


EFD 3-Device and 2-Gang Tandem

Class I, Division 1 and 2, Groups C, D
Class II, Division 1 and 2, Groups E, F, G
Class III
NEMA 7CD, 9EFG

EFD – 3-Device Pilot Light and Push Buttons

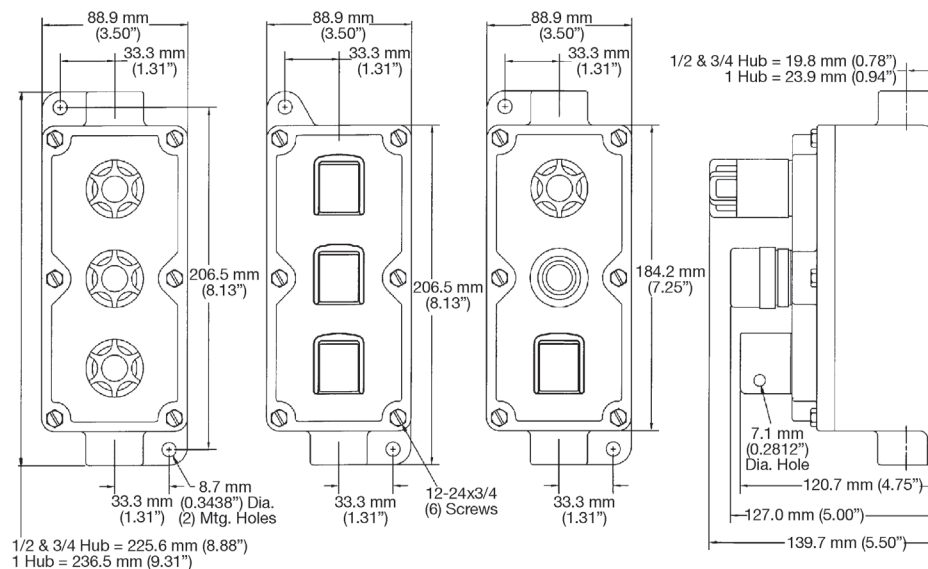

EFD — 2-Gang Tandem Pilot Light and Push Buttons

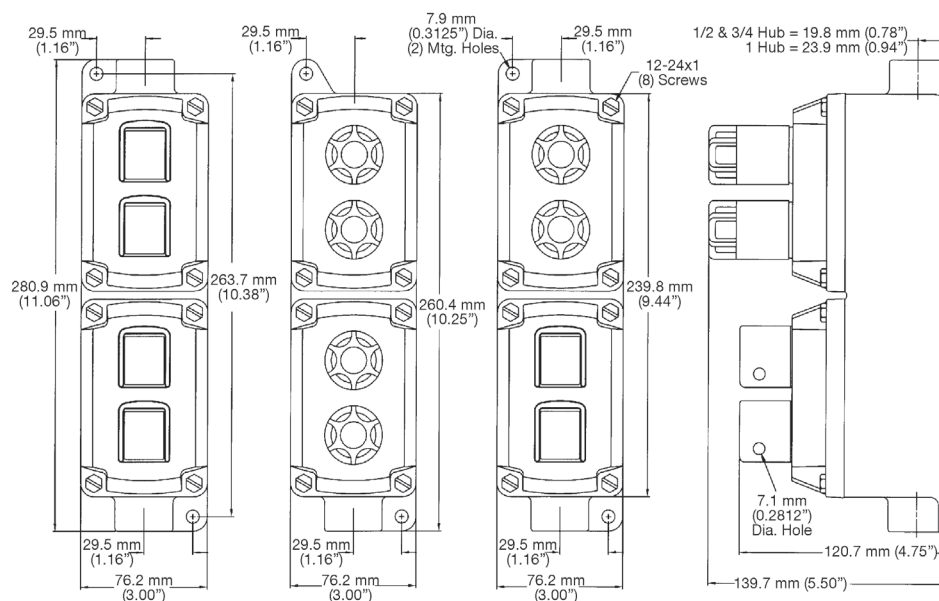**APPLETON™**

CONTROLS: NEC/CEC EXPLOSIONPROOF CONTROL STATIONS AND SWITCHES