

**BALDOR® • RELIANCE™**

---

# Customer information packet

## CD6215

1.5HP, 1750RPM, DC, 184C, 3636D, TEFC, F1

Class - None

Division -

## Specifications

|                               |                           |
|-------------------------------|---------------------------|
| Armature Voltage              | 180 V                     |
| Base Speed                    | 1750 rpm                  |
| Enclosure                     | TEFC                      |
| Field Voltage                 | 100 V                     |
|                               | 200 V                     |
| Frame                         | 184C                      |
| Frame Material                | Steel                     |
| Haz Area Class and Group      | None                      |
| Output Power                  | 1.500 HP                  |
| Agency Approvals              | CSA                       |
|                               | UR                        |
| Ambient Temperature           | 40 °C                     |
| Armature Current              | 7.5 a                     |
| Armature Inertia              | 30.342 lb-ft <sup>2</sup> |
| Base Indicator                | Rigid                     |
| Bearing Grease Type           | Polyrex EM (-20F +300F)   |
| Drip Cover                    | No Drip Cover             |
| Duty Rating                   | CONT                      |
| Feedback Device               | NO FEEDBACK               |
| Field Winding Type            | SHUNT                     |
| Heater Indicator              | No Heater                 |
| Lifting Lugs                  | Standard Lifting Lugs     |
| Motor Lead Exit               | Ko Box                    |
| Motor Lead Quantity/Wire Size | 4 @ 18 AWG                |
|                               | 2 @ 12 AWG                |
| Motor Lead Termination        | Flying Leads              |
| Motor Standards               | NEMA                      |
| Mounting Arrangement          | F1                        |
| Overall Length                | 17.41 IN                  |
| Product Family                | General Purpose           |
| Pulley End Bearing Type       | Sealed Bearing            |
| RoHS Status                   | ROHS COMPLIANT            |

## Part detail

|              |            |
|--------------|------------|
| Revision     | Z          |
| Type         | DC         |
| Mech. spec.  | 36-5257    |
| Base         |            |
| Status       | PRD/A      |
| Elec. spec.  | 36WGZ106   |
| Layout       | 36LY5257   |
| Eff. date    | 11-12-2024 |
| CD Diagram   | CD0860C01  |
| Poles        | 00         |
| Leads        |            |
| Proprietary  | False      |
| Created date | 01-01-0001 |


|                                 |                    |
|---------------------------------|--------------------|
| <b>Service Factor</b>           | 1.00               |
| <b>Shaft Diameter</b>           | 0.875 IN           |
| <b>Shaft Extension Location</b> | Pulley End         |
| <b>Shaft Ground Indicator</b>   | No Shaft Grounding |
| <b>Shaft Rotation</b>           | Reversible         |
| <b>Shaft Slinger Indicator</b>  | No Slinger         |

**Nameplate**

| <b>NP0111L</b>  |             |                |        |
|-----------------|-------------|----------------|--------|
| <b>CAT.NO.</b>  | CD6215      |                |        |
| <b>SPEC.</b>    | 36-5257Z106 |                |        |
| <b>HP</b>       | 1.5         | <b>ENCL</b>    | TEFC   |
| <b>RPM</b>      | 1750        |                |        |
| <b>FRAME</b>    | 184C        | <b>TYPE</b>    | 3636D  |
| <b>ARM V</b>    | 180         | <b>ARM A</b>   | 7.5    |
| <b>FLD V</b>    | 200/100     | <b>FLD A</b>   | .25/.5 |
| <b>INSUL</b>    | F           | <b>AMB.</b>    | 40     |
| <b>DUTY</b>     | CONT        | <b>SUPPLY</b>  | ----   |
| <b>BRG/DE</b>   | 6206        | <b>BRG/ODE</b> | 6205   |
| <b>BRUSHES</b>  | 2/BP5125A01 |                |        |
|                 | BLANK       |                |        |
| <b>SER.</b>     |             |                |        |
| <b>BLANK</b>    |             |                |        |
| <b>APRV-CSA</b> | APRV-UL     |                |        |


**Accessories**

| <b>Part number</b> | <b>Description</b>           | <b>Multiplier</b> |
|--------------------|------------------------------|-------------------|
| TK3600             | TEFC TACH MTG.CONVERSION KIT |                   |

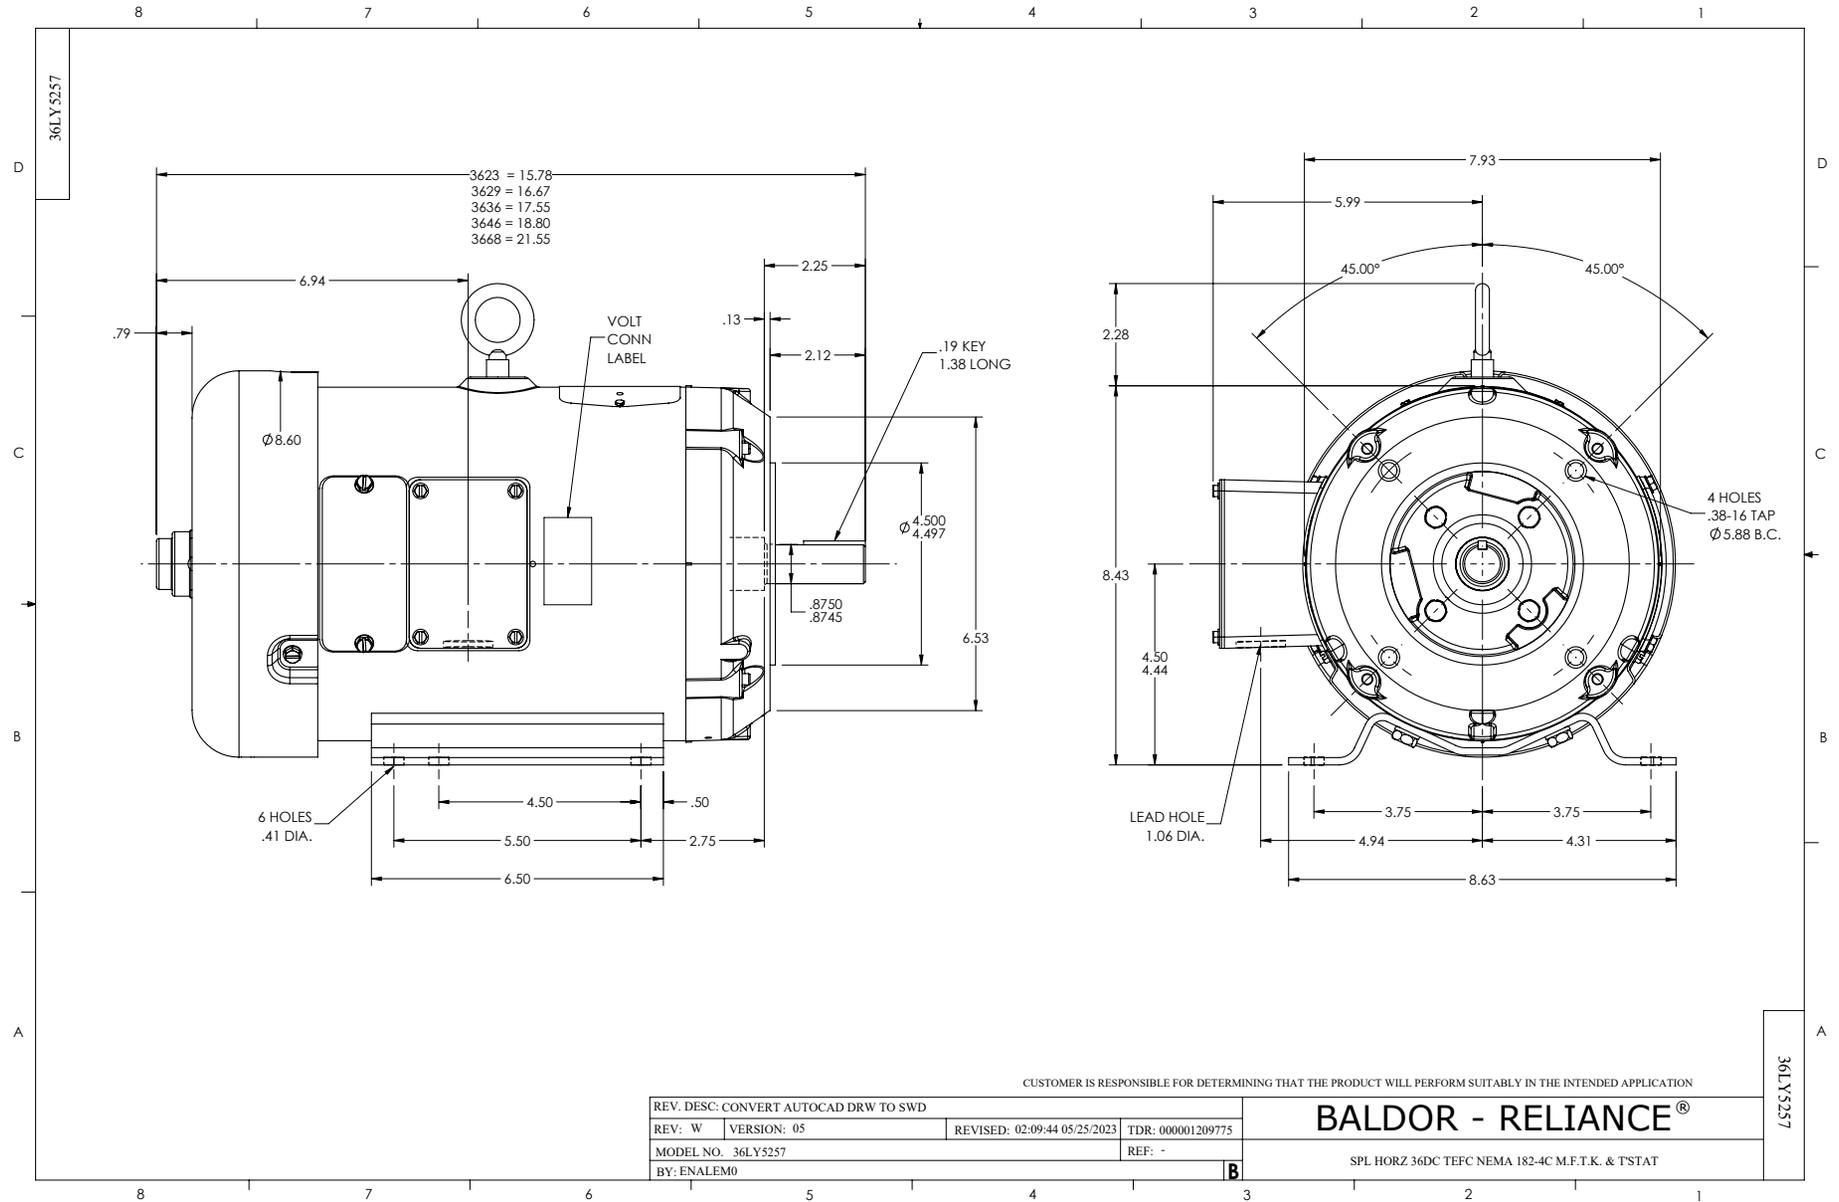

CD0860C01

# SHUNT WOUND

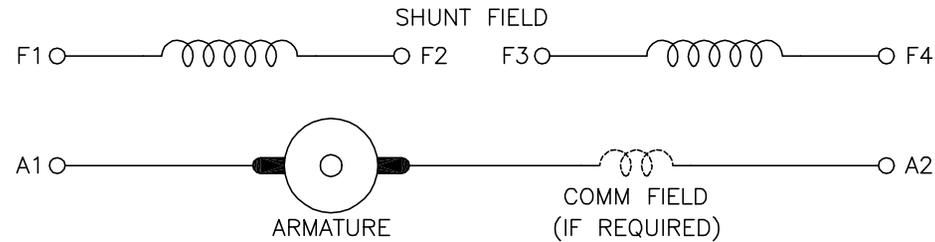

| CONNECTION   | DIRECTION OF ROTATION       |               |                             |               |
|--------------|-----------------------------|---------------|-----------------------------|---------------|
|              | CWDE                        |               | CCWDE                       |               |
|              | POS TERM (+)                | NEG TERM (-)  | POS TERM (+)                | NEG TERM (-)  |
| HIGH VOLTAGE | A1<br>F1<br>CONNECT F2 & F3 | A2<br>F4      | A2<br>F1<br>CONNECT F2 & F3 | A1<br>F4      |
| LOW VOLTAGE  | A1<br>F1 & F3               | A2<br>F2 & F4 | A2<br>F1 & F3               | A1<br>F2 & F4 |

NOTES:

1. LIMIT STARTING INRUSH CURRENT TO NOT MORE THAN 3 TIMES RATED AMPERES BY ENERGIZING THE FULL SHUNT FIELD BEFORE BRINGING THE ARMATURE VOLTAGE UP SLOWLY OR IN STEPS.
2. OPTIONAL FIELD REOSTAT MAY BE CONNECTED IN SERIES WITH THE SHUNT FIELD.
3. OPTIONAL THERMOSTAT LEADS ARE MARKED J,J.

|                                |         |                              |                |
|--------------------------------|---------|------------------------------|----------------|
| REV. DESC: NEW, REPLACE CD0860 |         |                              |                |
| REV. LTR: -                    | BY: JLP | REVISED: 15:35:22 11/03/2004 | TDR: 347796    |
| 100098000                      |         | FILE: AAA00121477            | REF: CD0860C01 |
|                                |         | MTL: -                       |                |

**BALDOR ELECTRIC Co.**

DC CONNECTION DIAGRAM, SHUNT FIELD, 6 LEAD, DUAL VOLTAGE

CD0860C01