



Customer information packet

MVM3458C

.25KW, 1725RPM, 3PH, 60HZ, D71C, 3320M, TEFC

Specifications

Enclosure	TEFC
Frame	D71C
Frame Material	Steel
Frequency	60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	.330 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	.700 A @ 460.0 V 1.400 A @ 230.0 V 1.700 A @ 208.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	74.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Feedback Signal	NONE
Frame Prefix	D
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater

Part detail

Revision	AT
Type	AC
Mech. spec.	33-1922
Base	
Status	PRD/A
Elec. spec.	33WG0675
Layout	33LY1922
Eff. date	10-24-2024
CD Diagram	CD0005A05
Poles	04
Leads	9#18
Proprietary	False
Created date	06-25-2007

High Voltage Full Load Amps	0.7 a
Insulation Class	B
Inverter Code	Not Inverter
KVA Code	-
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	IEC
Motor Type	3320M
Mounting Arrangement	F2
Number of Poles	4
Overall Length	10.74 IN
Power Factor	58
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Tapped & Key
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.35
Shaft Diameter	0.552 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1725 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2	None
-------------------	------

Nameplate

NP1379L									
CAT.NO.	MVM3458C								
SPEC.	33-1922-675								
IEC FRAME	D71C	K.W.		.25 TE					
VOLTS	230/460 ENCL TEFC								
AMP	1.4/.7								
RPM	1725			I.P.		54			
HZ	60		PH		3	CL		B	
SER.F.	1.35		DES		B	CODE		-	
NEMA-NOM-EFF	74		PF		58				
RATING	40C AMB-CONT								
CC									
DE	6203	ODE		6203					
SER. #									
	SFA 1.6/.8								

AC Induction Motor Performance Data

Record # 16144

Typical performance - not guaranteed values

Winding: 33WG0675-R001			Type: 3320M		Enclosure: TEFC		
Nameplate Data			460 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		0.33	Full Load Torque		1 LB-FT		
Volts		230/460	Start Configuration		direct on line		
Full Load Amps		1.4/0.7	Breakdown Torque		4.2 LB-FT		
R.P.M.		1725	Pull-up Torque		3.9 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		4.4 LB-FT	
NEMA Design Code		B	KVA Code	-	Starting Current		4 A
Service Factor (S.F.)		1.35	No-load Current		0.53 A		
NEMA Nom. Eff.		74	Power Factor	58	Line-line Res. @ 25°C		47.3 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		56°C
S.F. Amps		1.6/0.8	Temp. Rise @ S.F. Load		71°C		

Load Characteristics 460 V, 60 Hz, 0.33 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	29	42	53	62	69	75	72
Efficiency	49	64	71	74	75	75	75.4
Speed	1776	1758	1738	1717	1695	1670	1686
Line amperes	0.54	0.57	0.61	0.67	0.74	0.82	0.77

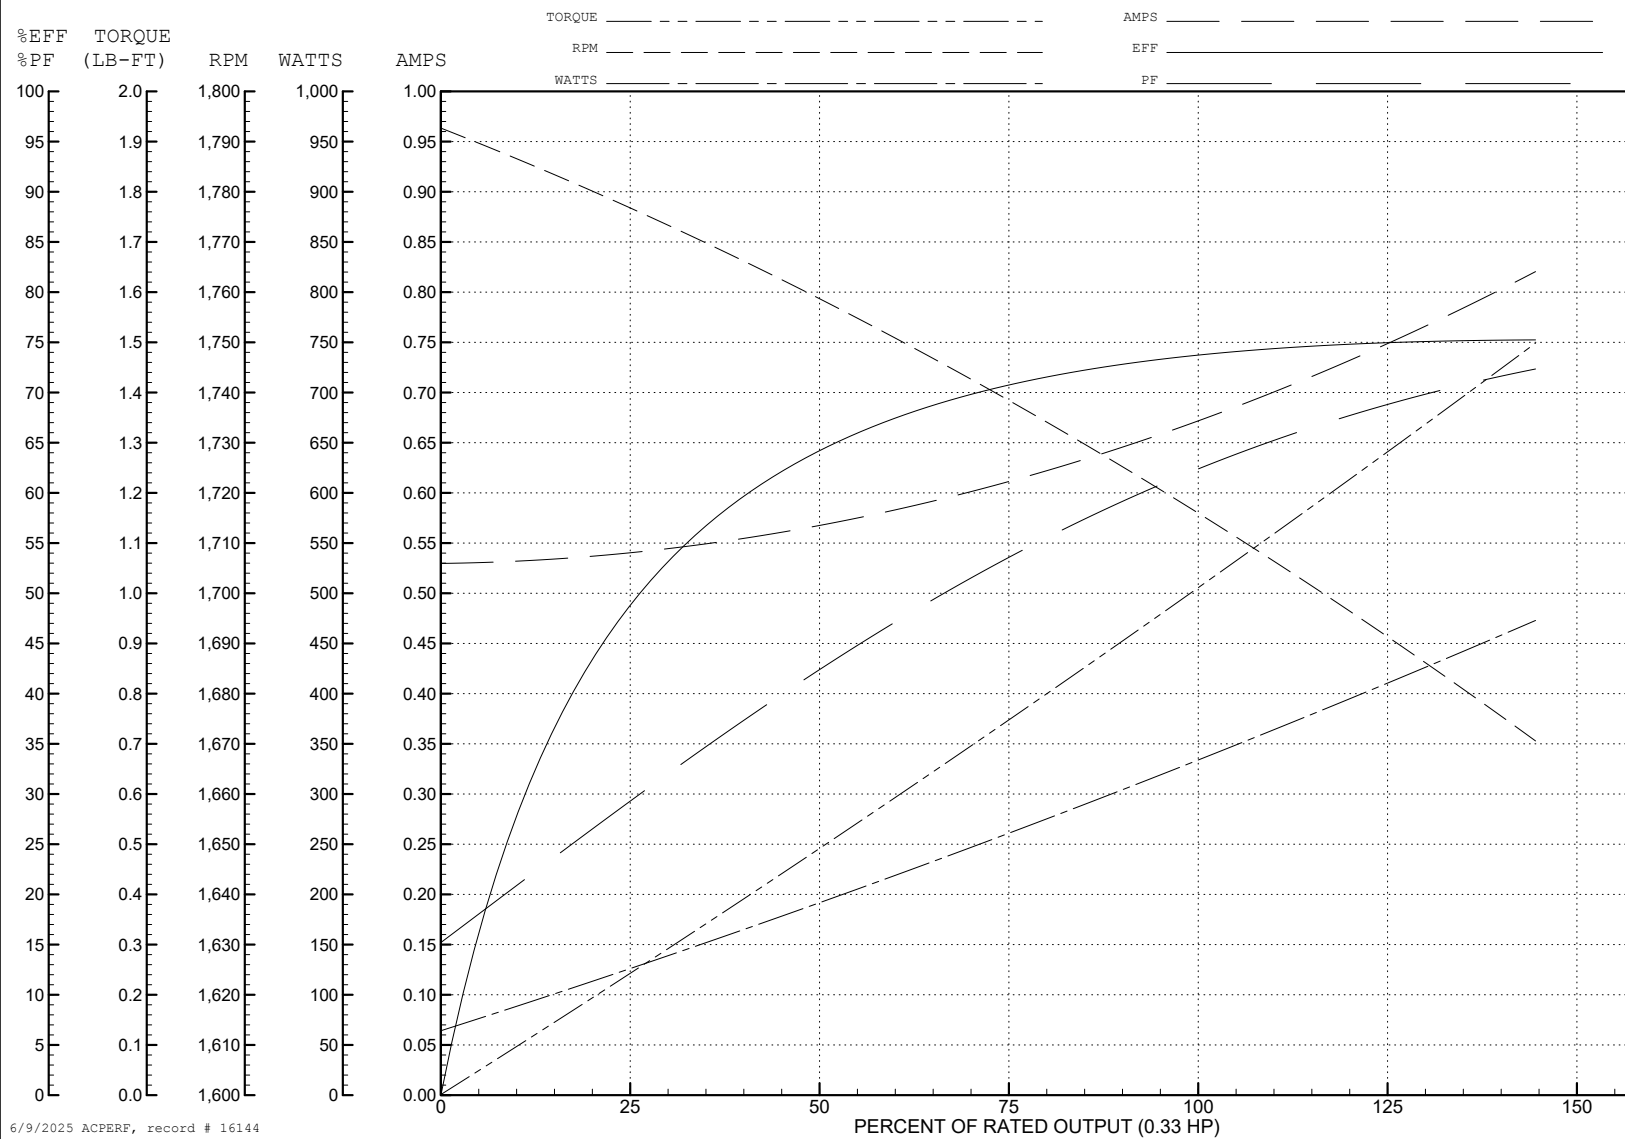
ABB Motors and Mechanical Inc.

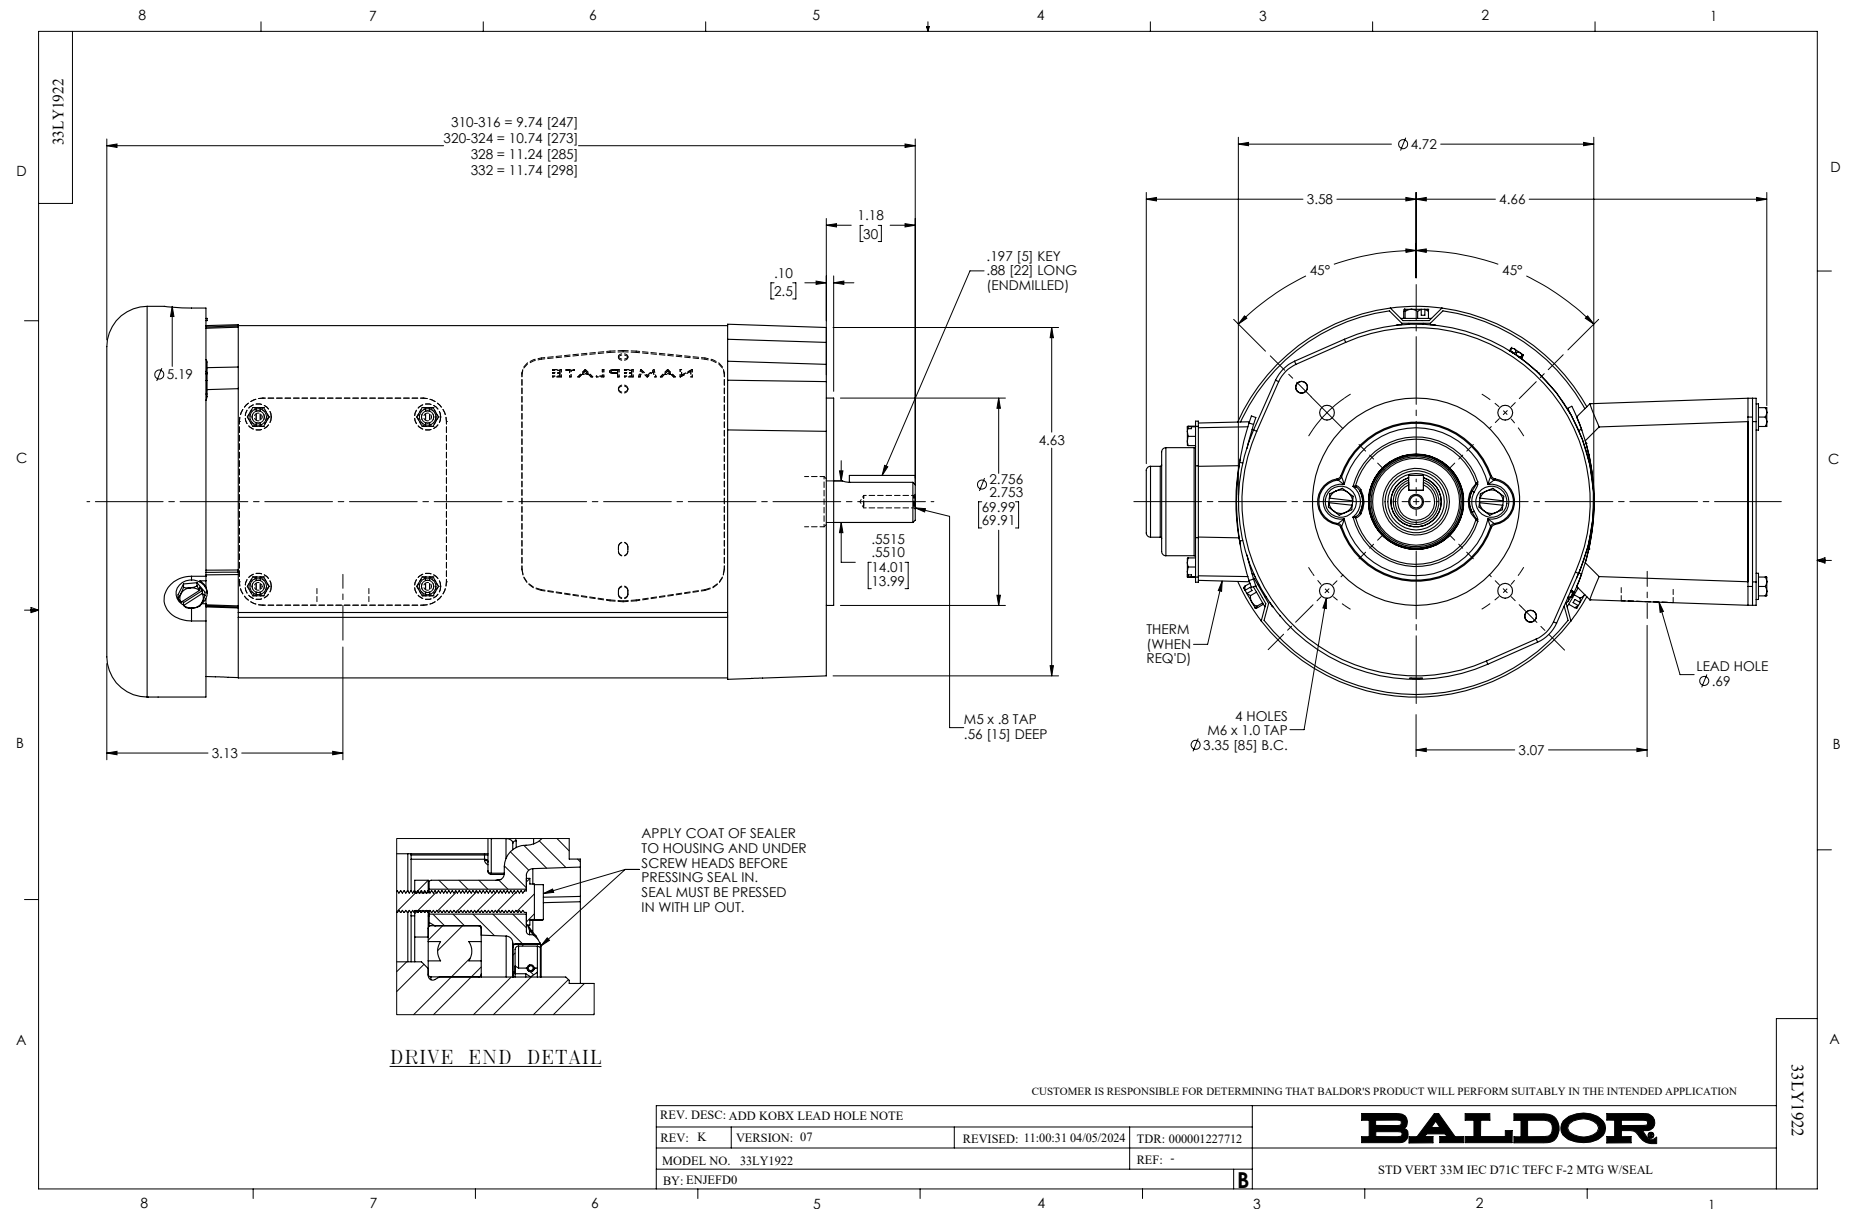
WINDING # 33WG0675

Typical performance - not guaranteed values.

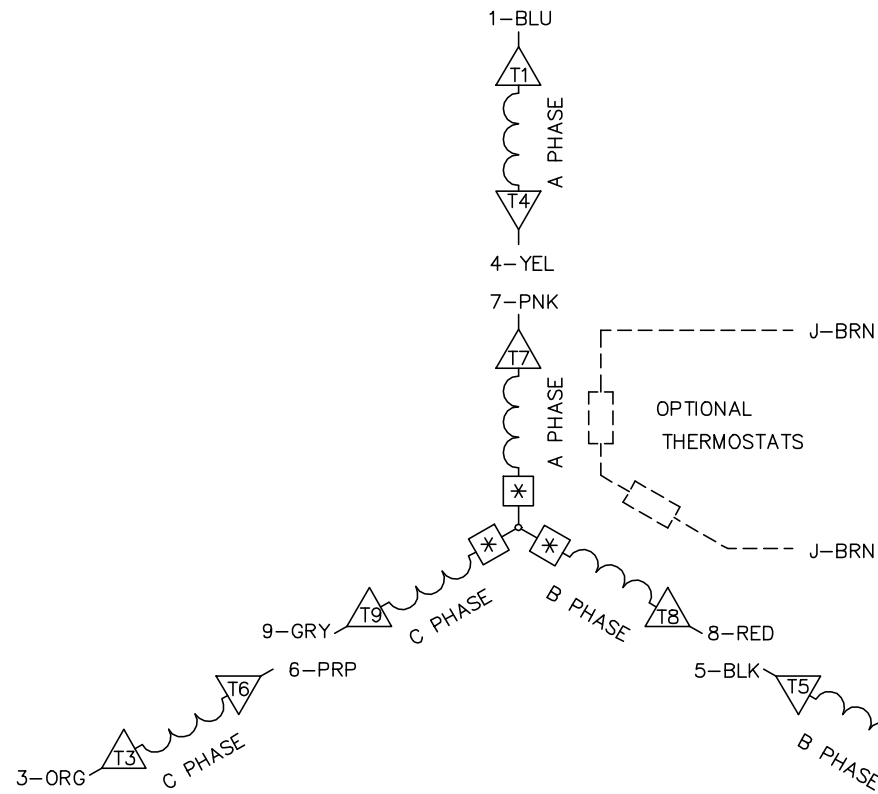

0.33 HP 3 PH 60 HZ 1725 RPM 460 V 3320M

TORQUES (LB-FT) : PO=4.2 PU=3.9 LR=4.4 LRA=4






CD0005A05

LOW VOLTAGE
(2Y)

LINE

HIGH VOLTAGE
(1Y)

LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.
5. =MAGNET WIRE COIL END WITH I.D. NUMBER.
6. =MAGNET WIRE COIL END WITH I.D. SYMBOL.
7. SEE CW PRINT FOR NEST TO NEST CROSSOVER CONNECTIONS.

REV. DESC: ADD NEST NOTE

REV. LTR: C

VERSION: 03

TDR: 000000445597

CD0005A05

FILE: \CKA\00024\847

REVISED: 12:51:06 11/15/2007

MTL: -

BY: CKMICRO

BALDOR • DODGE • RELIANCE

3PH, DV, 9 LEADS, CK

CD0005A05