

ACSEW Cast Control Centers

Explosionproof, Dust-Ignitionproof

NEC/CEC:

Class I, Division 1 and 2, Groups B, C, D
Class II, Division 1 and 2, Groups E, F, G
Class III
NEMA 4, 7BCD, 9EFG

NEC/CEC — cULus Optional:

Class I, Division 1 and 2, Groups B, C, D
Class II, Division 1 and 2, Groups E, F, G
Class III
NEMA 4, 7BCD, 9EFG

Application

- Explosionproof control centers are used where hazardous materials are handled or stored.
- Grouping push buttons, switches, pilot devices and glass lenses in one enclosure will satisfy a wide range of control applications. This is most beneficial when having areas with minimum space or needing to centralize all controls in one area.

Features

- Precision machined flame path between body and cover.
- Bolt on stainless steel slotted mounting feet.
- Flexible hinge mounting on either side, (hinges standard on catalog numbers ACSEW121206 and above).
- External flange maximizes internal space.
- Wall thickness suitable for minimum of five full threads.
- Factory assembled and wired to specifications.
- Operators are spaced on 2-1/2" centers.
- All push buttons and selector switches have stainless steel shafts.
- Push button and selector switches are rated 10 Amp 600 Vac.
- Pilot lights are rated 6 Vac up to 600 Vac with transformer.
- Round windows available in a wide range of sizes.
- Provision for mounting pan.
- Ground lug package and installation instructions for termination of ground wires enclosed.
- O-ring gasket insures watertight integrity.

Standard Materials

- Bodies and covers: sand cast copperfree (4/10 of 1% max.) aluminum
- Cover bolts and mounting feet: stainless steel
- O-ring: neoprene

Standard Finish

- Bodies and covers: shot blast finish

Options

- Refer to the detailed options section at the end of this catalog section for the complete options available.
- Custom drilling and tapping is available. Please review the Drill and Tap form at the end of this catalog section.
- Standard product has UL and CSA certification. For cULus certification only, add suffix **-CUL**.
- For window installed option, contact your local representative for maximum number of operators.

NEC/CEC Certifications and Compliances

- UL Standards: UL 1203
- UL Classified: E84577
- UL Listed: Control Operators E10449
- CSA Standards: C22.2 No. 14-M, C22.2 No. 24, C22.2 No. 30
- CSA Certified: 042130



CONTROLS: NEC/CEC EXPLOSIONPROOF/FLAMEPROOF CONTROL STATIONS AND SWITCHES

APPLETON™

ACSEW Control Operators: Push Button Components

Momentary Contact. Explosionproof

NEC/CEC:
 Class I, Division 1 and 2, Groups B, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 NEMA 4, 7BCD, 9EFG

NEC/CEC — cULus Optional:
 Class I, Division 1 and 2, Groups B, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 NEMA 4, 7BCD, 9EFG

Catalog Numbering Guide

AE
 Appleton Explosionproof

P
 Push Button

D
 Dual Push Button:
 Omit for Single Push Button

B
 Color:
 B - Black
 R - Red
 G - Green

A
 Contact Arrangement:
 A - 1 NO
 B - 2 NO
 C - 1 NC
 D - 2 NC
 E - 1 NO and 1 NC
 F - 2 NO and 2 NC

L
 Long Barrel:
 Omit for Short Barrel



AEPBA



AEPDGRA

Single Push Buttons

Contacts ①	Button Color	Catalog Number	
		Short Barrel	Long Barrel
1 NO	Black	AEPBA	AEPBA-L
1 NO	Red	AEPRA	AEPRA-L
1 NO	Green	AEPGA	AEPGA-L
2 NO	Black	AEPBB	AEPBB-L
2 NO	Red	AEPRB	AEPRB-L
2 NO	Green	AEPGB	AEPGB-L
1 NC	Black	AEPBC	AEPBC-L
1 NC	Red	AEPRC	AEPRC-L
1 NC	Green	AEPGC	AEPGC-L
2 NC	Black	AEPBD	AEPBD-L
2 NC	Red	AEP RD	AEP RD-L
2 NC	Green	AEPGD	AEPGD-L
1 NO and 1 NC	Black	AEPBE	AEPBE-L
1 NO and 1 NC	Red	AEPRE	AEPRE-L
1 NO and 1 NC	Green	AEPGE	AEPGE-L
2 NO and 2 NC	Black	AEPBF	AEPBF-L
2 NO and 2 NC	Red	AEP RF	AEP RF-L
2 NO and 2 NC	Green	AEPGF	AEPGF-L

Dual Push Buttons

Contacts ①	Button Color	Catalog Number	
		Short Barrel	Long Barrel
2 NO	Green/Red	AEPDGRB	AEPDGRB-L
2 NO	Black/Black	AEPDBBB	AEPDBBB-L
2 NC	Green/Red	AEPDGRD	AEPDGRD-L
2 NC	Black/Black	AEPDBBD	AEPDBBD-L
1 NO and 1 NC	Green/Red	AEPDGRE	AEPDGRE-L
1 NO and 1 NC	Black/Black	AEPDBBE	AEPDBBE-L
2 NO and 2 NC	Green/Red	AEPDGRF	AEPDGRF-L
2 NO and 2 NC	Black/Black	AEPDBBF	AEPDBBF-L

① NO = Normally Open; NC = Normally Closed.

NOTE: Use long barrel devices on enclosure applications with cover thickness exceeding 22.225 mm (0.875").
 For legend plates, see Options, Accessories and Nameplates. All Operators are 3/4" NPS

CONTROLS: NEC/CEC EXPLOSIONPROOF/FLAMEPROOF CONTROL STATIONS AND SWITCHES

APPLETON™

ACSEW Control Operators

Add 1" to length for Contact Block. Thread Size — 3/4" NPSM.

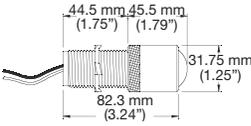
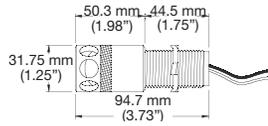
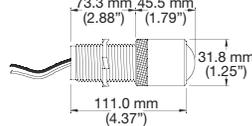
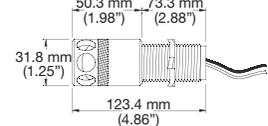
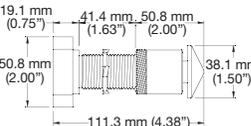
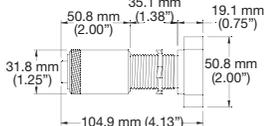
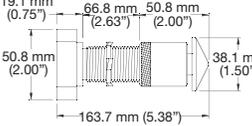
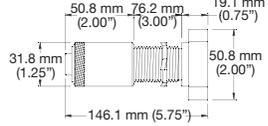
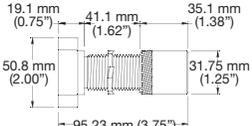
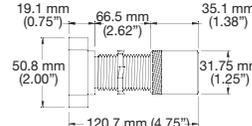
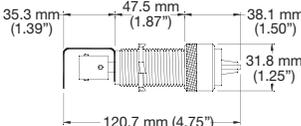
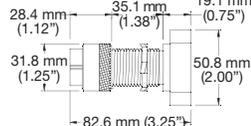
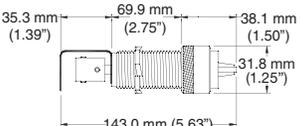
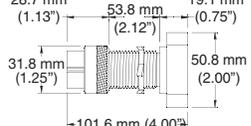

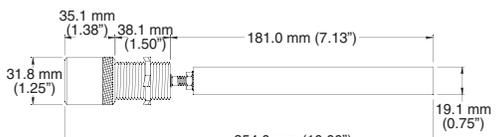
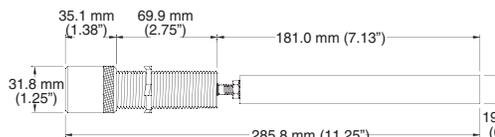
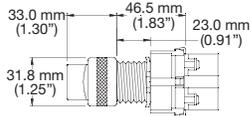
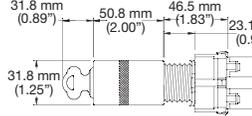
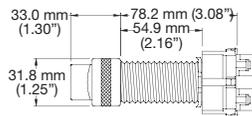
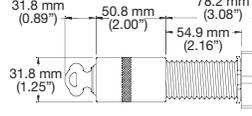
NEC/CEC:

Class I, Division 1 and 2, Groups B, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 NEMA 4, 7BCD, 9EFG

NEC/CEC — cULus Optional:

Class I, Division 1 and 2, Groups B, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 NEMA 4, 7BCD, 9EFG

Dimensions in Millimeters (Inches)

Short Barrel		Long Barrel	
 <p>Standard Pilot Light</p>	 <p>Guarded Pilot Light</p>	 <p>Standard Pilot Light</p>	 <p>Guarded Pilot Light</p>
 <p>Mushroom Head Push Button</p>	 <p>Push-To-Test Pilot Light</p>	 <p>Mushroom Head Push Button</p>	 <p>Push-To-Test Pilot Light</p>
 <p>Push Button</p>	 <p>Push Button</p>		
 <p>Potentiometer Operator</p>	 <p>Dual Push Button</p>	 <p>Potentiometer Operator</p>	 <p>Dual Push Button</p>
 <p>Miniature Reset Button</p>	 <p>Standard Reset Button</p>	 <p>Standard Reset Button</p>	
 <p>Selector Switch</p>	 <p>Keyed Selector Switch</p>	 <p>Selector Switch</p>	 <p>Keyed Selector Switch</p>

CONTROL-S: NEC/CEC EXPLOSIONPROOF/FLAMEPROOF CONTROL STATIONS AND SWITCHES

APPLETON