

ACSEW Cast Control Centers

Explosionproof, Dust-Ignitionproof

NEC/CEC:

Class I, Division 1 and 2, Groups B, C, D
Class II, Division 1 and 2, Groups E, F, G
Class III
NEMA 4, 7BCD, 9EFG

NEC/CEC — cULus Optional:

Class I, Division 1 and 2, Groups B, C, D
Class II, Division 1 and 2, Groups E, F, G
Class III
NEMA 4, 7BCD, 9EFG

Application

- Explosionproof control centers are used where hazardous materials are handled or stored.
- Grouping push buttons, switches, pilot devices and glass lenses in one enclosure will satisfy a wide range of control applications. This is most beneficial when having areas with minimum space or needing to centralize all controls in one area.

Features

- Precision machined flame path between body and cover.
- Bolt on stainless steel slotted mounting feet.
- Flexible hinge mounting on either side, (hinges standard on catalog numbers ACSEW121206 and above).
- External flange maximizes internal space.
- Wall thickness suitable for minimum of five full threads.
- Factory assembled and wired to specifications.
- Operators are spaced on 2-1/2" centers.
- All push buttons and selector switches have stainless steel shafts.
- Push button and selector switches are rated 10 Amp 600 Vac.
- Pilot lights are rated 6 Vac up to 600 Vac with transformer.
- Round windows available in a wide range of sizes.
- Provision for mounting pan.
- Ground lug package and installation instructions for termination of ground wires enclosed.
- O-ring gasket insures watertight integrity.

Standard Materials

- Bodies and covers: sand cast copperfree (4/10 of 1% max.) aluminum
- Cover bolts and mounting feet: stainless steel
- O-ring: neoprene

Standard Finish

- Bodies and covers: shot blast finish

Options

- Refer to the detailed options section at the end of this catalog section for the complete options available.
- Custom drilling and tapping is available. Please review the Drill and Tap form at the end of this catalog section.
- Standard product has UL and CSA certification. For cULus certification only, add suffix **-CUL**.
- For window installed option, contact your local representative for maximum number of operators.

NEC/CEC Certifications and Compliances

- UL Standards: UL 1203
- UL Classified: E84577
- UL Listed: Control Operators E10449
- CSA Standards: C22.2 No. 14-M, C22.2 No. 24, C22.2 No. 30
- CSA Certified: 042130



CONTROLS: NEC/CEC EXPLOSIONPROOF/FLAMEPROOF CONTROL STATIONS AND SWITCHES

APPLETON™

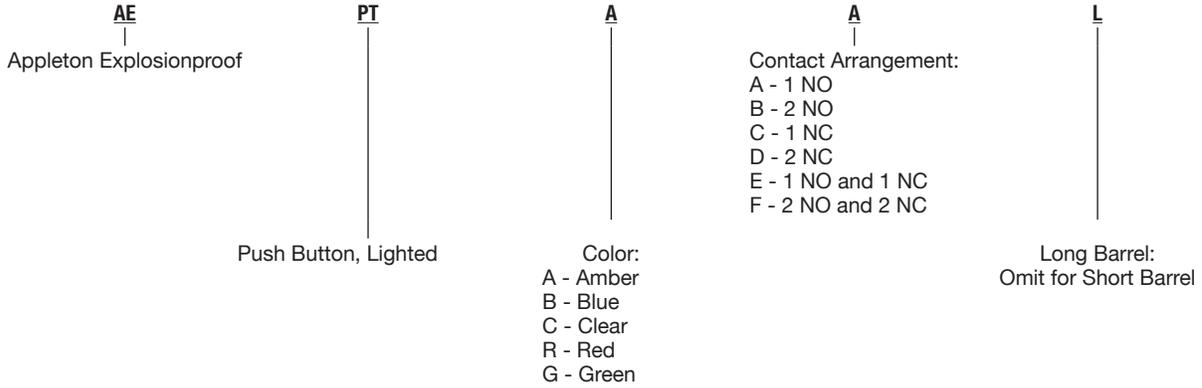
ACSEW Control Operators: Lighted Push Button Components

Momentary Contact. Explosionproof

NEC/CEC:
 Class I, Division 1 and 2, Groups B, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 NEMA 4, 7BCD, 9EFG

NEC/CEC — cULus Optional:
 Class I, Division 1 and 2, Groups B, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 NEMA 4, 7BCD, 9EFG

Catalog Numbering Guide



Contacts ①	Lens Color	Catalog Number	
		Short Barrel	Long Barrel
1 NO	Amber	AEPTAA	AEPTAA-L
1 NO	Red	AEPTRA	AEPTRA-L
1 NO	Green	AEPTGA	AEPTGA-L
1 NO	Clear	AEPTCA	AEPTCA-L
1 NO	Blue	AEPTBA	AEPTBA-L
2 NO	Amber	AEPTAB	AEPTAB-L
2 NO	Red	AEPTRB	AEPTRB-L
2 NO	Green	AEPTGB	AEPTGB-L
2 NO	Clear	AEPTCB	AEPTCB-L
2 NO	Blue	AEPTBB	AEPTBB-L
1 NC	Amber	AEPTAC	AEPTAC-L
1 NC	Red	AEPTRC	AEPTRC-L
1 NC	Green	AEPTGC	AEPTGC-L
1 NC	Clear	AEPTCC	AEPTCC-L
1 NC	Blue	AEPTBC	AEPTBC-L

Contacts ①	Lens Color	Catalog Number	
		Short Barrel	Long Barrel
2 NC	Amber	AEPTAD	AEPTAD-L
2 NC	Red	AEPTRD	AEPTRD-L
2 NC	Green	AEPTGD	AEPTGD-L
2 NC	Clear	AEPTCD	AEPTCD-L
2 NC	Blue	AEPTBD	AEPTBD-L
1 NO and 1 NC	Amber	AEPTAE	AEPTAE-L
1 NO and 1 NC	Red	AEPTRE	AEPTRE-L
1 NO and 1 NC	Green	AEPTGE	AEPTGE-L
1 NO and 1 NC	Clear	AEPTCE	AEPTCE-L
1 NO and 1 NC	Blue	AEPTBE	AEPTBE-L
2 NO and 2 NC	Amber	AEPTAF	AEPTAF-L
2 NO and 2 NC	Red	AEPTRF	AEPTRF-L
2 NO and 2 NC	Green	AEPTGF	AEPTGF-L
2 NO and 2 NC	Clear	AEPTCF	AEPTCF-L
2 NO and 2 NC	Blue	AEPTBF	AEPTBF-L

① NO = Normally Open; NC = Normally Closed.

NOTE: Use long barrel devices on enclosure applications with cover thickness exceeding 22.225 mm (0.875").
 For legend plates, see Options, Accessories and Nameplates. All Operators are 3/4" NPSM.

ACSEW Control Operators

Add 1" to length for Contact Block. Thread Size — 3/4" NPSM.

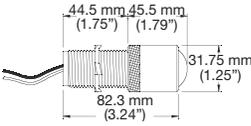
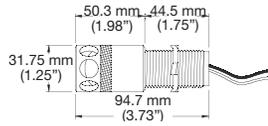
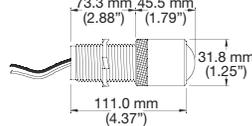
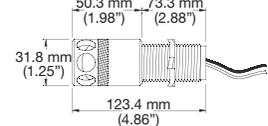
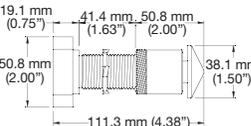
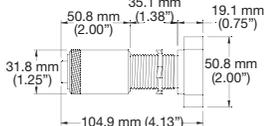
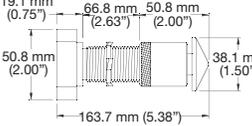
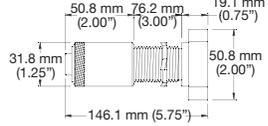
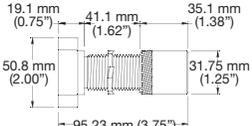
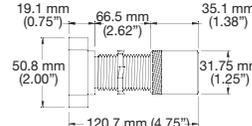
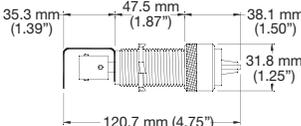

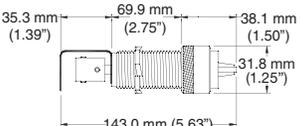


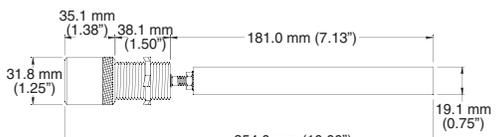
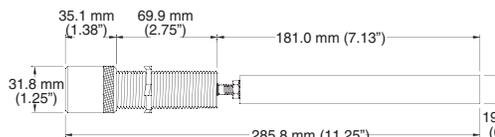
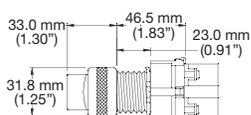
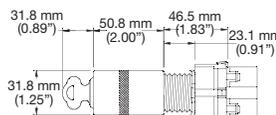
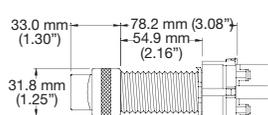
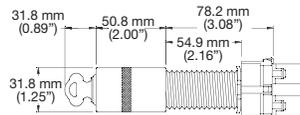
NEC/CEC:

Class I, Division 1 and 2, Groups B, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 NEMA 4, 7BCD, 9EFG

NEC/CEC — cULus Optional:

Class I, Division 1 and 2, Groups B, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 NEMA 4, 7BCD, 9EFG

Dimensions in Millimeters (Inches)

Short Barrel		Long Barrel	
 <p>Standard Pilot Light</p>	 <p>Guarded Pilot Light</p>	 <p>Standard Pilot Light</p>	 <p>Guarded Pilot Light</p>
 <p>Mushroom Head Push Button</p>	 <p>Push-To-Test Pilot Light</p>	 <p>Mushroom Head Push Button</p>	 <p>Push-To-Test Pilot Light</p>
 <p>Push Button</p>	 <p>Push Button</p>		
 <p>Potentiometer Operator</p>	 <p>Dual Push Button</p>	 <p>Potentiometer Operator</p>	 <p>Dual Push Button</p>
 <p>Miniature Reset Button</p>			
 <p>Standard Reset Button</p>	 <p>Standard Reset Button</p>		
 <p>Selector Switch</p>	 <p>Keyed Selector Switch</p>	 <p>Selector Switch</p>	 <p>Keyed Selector Switch</p>

CONTROL-S: NEC/CEC EXPLOSIONPROOF/FLAMEPROOF CONTROL STATIONS AND SWITCHES

APPLETON