

AJBEW Cast Junction Boxes

Explosionproof, Dust-Ignitionproof

NEC/CEC:

Class I, Division 1 and 2, Groups B \diamond , C \diamond , D
Class I, Zone 1 and 2, Groups IIA, IIB \diamond +H \diamond ₂ \diamond
Class II, Division 1 and 2, Groups E, F, G
Class III
NEMA 4, 7B \diamond C \diamond D, 9EFG

Application

- Explosionproof junction boxes are used where hazardous materials are handled or stored. These enclosures may be used for:
 - Terminals
 - Splicing wires
 - Pull boxes
 - Bus boxes

Features

- Precision machined flame path between box and cover.
- Bolt on stainless steel slotted mounting feet for horizontal or vertical mounting.
- Flexible hinge mounting either left or right side is standard on all boxes 12 x 12 x 06 and larger.
- External flange maximizes internal space.
- Wall thickness suitable for minimum of five full threads.
- Provision for mounting pan.
- Wide range of drilled and tapped outlets.
- Ground lug package and installation instructions for termination of ground wires enclosed.
- O-ring gasket insures watertight integrity.

Standard Materials

- Bodies and covers: sand cast copperfree (4/10 of 1% max.) aluminum
- Cover bolts: stainless steel
- O-ring: neoprene
- Hinges: stainless steel
- Mounting pan: galvanized steel

Standard Finishes

- Bodies and covers: shot blast finish standard

Options

- Custom drilling and tapping.
- Set of 4 standoffs 12.7 mm (0.50") high. For factory-installed option add suffix **-AB**.
- Breather, NEMA 4X (includes outlets and installation). For factory-installed option add suffix **-BR**, for field-installed option order catalog number **BRTB4X**.
- Drain, NEMA 4X (includes outlets and installation). For factory-installed option add suffix **-DN** for field-installed option order catalog number **ECD50B4X**.
- Desiccate package. For factory-installed option add suffix **-DP1**, for field-installed option order catalog number **AWG13/1CT**.
- External grounding stud 3/8"-16. For fac



tory-installed option add suffix **-EGS**.

- Gray epoxy powder coat (outside). For factory-installed option add suffix **-G1**.
- Gray epoxy powder coat available to provide NEMA 4X rating (inside and outside). For factory-installed option add suffix **-G2**.
- Internal Ground Stud, #14 - #2. For factory-installed option add suffix **-GNDKIT**.
- Hinges: stainless steel hinge available for boxes up to 11 x 30 x 03. For factory-installed option add suffix **-H**.
- Hinge Kit, 2 light duty SS hinges. For field-installed option order catalog number **AH0F12SS**.
- Hinge Kit, 2 heavy duty SS hinges. For field-installed option order catalog number **AH0F22SS**.
- Hinge Kit, 3 heavy duty SS hinges. For field-installed option order catalog number **AH0F23SS**.
- Terminal blocks 600 Volt, 30 Amp Indicate number of points: example: 5 points = 5K. For factory-installed option add suffix **-K**.
- Plastic nameplate, 50.8 x 101.6 mm (2.00 x 4.00"), 3.3 mm (13") black letters on white surface, 3 lines max, specify legend. For factory-installed option add suffix **-NP**.
- SS captive Quad-Lead bolts. For factory-installed option add suffix **-Q**.
- Mounting pan. For factory-installed option add suffix **-Z**.

NEC/CEC Certifications and Compliances

- UL Standard: UL 1203
- cULus Listed: E85310
- CSA Standard: C22.2 No. 25, C22.2 No.30
- CSA Certified: 042129

\diamond For Groups B and C, all conduits must be sealed within 50.8 mm (2") of the enclosure.

AJBEW Cast Junction Boxes

Explosionproof, Dust-Ignitionproof

NEC/CEC:

Class I, Division 1 and 2, Groups B \diamond , C \diamond , D
 Class I, Zone 1 and 2, Groups IIA, IIB \diamond +H \diamond ₂ \diamond
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 NEMA 4, 7B \diamond C \diamond D, 9EFG

Overall Dimensions			Dimensions in Millimeters (Inches)									Max. Conduit Size Inches	Ship Weight kg (lb)	Mounting Hardware Catalog Number	Catalog Number
F	E	G	Mounting Dimensions			Inside Dimensions									
			A	AA	B	BB	W	H	Db	Dc	K				
593.9 (23.38)	593.9 (23.38)	303.3 (11.94)	330.2 (13.00)	552.5 (21.75)	552.5 (21.75)	330.2 (13.00)	463.6 (18.25)	463.6 (18.25)	196.9 (7.75)	38.1 (1.50)	114.3 (4.50)	4	89.8 (198)	AMH8	AJBEW181808
608.1 (23.94)	762.0 (30.00)	309.4 (12.18)	409.7 (16.13)	552.5 (21.75)	704.9 (27.75)	466.9 (18.38)	463.6 (18.25)	614.4 (24.19)	196.9 (7.75)	38.1 (1.50)	128.5 (5.06)	4	101.6 (224)	AMH8	AJBEW182408
608.1 (23.94)	762.0 (30.00)	360.2 (14.18)	409.7 (16.13)	552.5 (21.75)	704.9 (27.75)	466.9 (18.38)	463.6 (18.25)	614.4 (24.19)	247.7 (9.75)	38.1 (1.50)	146.1 (5.75)	4	106.6 (235)	AMH8	AJBEW182410
574.8 (22.63)	879.6 (34.63)	308.1 (12.13)	N/A	552.5 (21.75)	N/A	584.2 (23.00)	463.6 (18.25)	768.4 (30.25)	196.9 (7.75)	38.1 (1.50)	120.7 (4.75)	4	120.2 (265)	AMH5	AJBEW183008
596.9 (23.50)	1060.5 (41.75)	312.7 (12.31)	279.4 (11.00)	552.5 (21.75)	1003.3 (39.50)	736.6 (29.00)	463.6 (18.25)	927.1 (36.50)	196.9 (7.75)	38.1 (1.50)	120.7 (4.75)	4	113.4 (250)	AMH8	AJBEW183608
596.9 (23.50)	1060.5 (41.75)	363.5 (14.31)	279.4 (11.00)	552.5 (21.75)	1003.3 (39.50)	736.6 (29.00)	463.6 (18.25)	927.1 (36.50)	247.7 (9.75)	38.1 (1.50)	139.7 (5.50)	4	122.5 (270)	AMH8	AJBEW183610
606.6 (23.88)	1216.2 (47.88)	301.8 (11.88)	406.4 (16.00)	584.2 (23.00)	1152.7 (45.38)	974.9 (38.38)	473.2 (18.63)	1073.2 (42.25)	177.8 (7.00)	38.1 (1.50)	127.0 (5.00)	4	140.6 (310)	AMH8	AJBEW184207
635.0 (25.00)	1651.0 (65.00)	323.9 (12.75)	N/A	596.9 (23.50)	N/A	1270.0 (50.00)	508.0 (20.00)	1524.0 (60.00)	174.8 (6.88)	38.1 (1.50)	120.7 (4.75)	4	236.3 (521)	AMH5	AJBEW206008 ①
746.3 (29.38)	746.3 (29.38)	312.7 (12.31)	466.9 (18.38)	711.2 (28.00)	711.2 (28.00)	466.9 (18.38)	622.3 (24.50)	622.3 (24.50)	196.9 (7.75)	38.1 (1.50)	127.0 (5.00)	4	102.1 (225)	AMH8	AJBEW242408 ①
746.3 (29.38)	746.3 (29.38)	363.5 (14.31)	466.9 (18.38)	711.2 (28.00)	711.2 (28.00)	466.9 (18.38)	622.3 (24.50)	622.3 (24.50)	247.7 (9.75)	38.1 (1.50)	155.7 (6.13)	4	108.9 (240)	AMH8	AJBEW242410 ①
736.6 (29.00)	889.0 (35.00)	330.2 (13.00)	457.2 (18.00)	711.2 (28.00)	863.6 (34.00)	584.2 (23.00)	609.6 (24.00)	762.0 (30.00)	203.2 (8.00)	49.3 (1.94)	133.4 (5.25)	4	190.5 (420)	AMH8	AJBEW243008 ①
781.1 (30.75)	1092.2 (43.00)	331.7 (13.06)	463.6 (18.25)	711.2 (28.00)	1016.0 (40.00)	736.6 (29.00)	616.0 (24.25)	920.8 (36.25)	196.9 (7.75)	41.4 (1.63)	130.3 (5.13)	4	190.5 (420)	AMH5	AJBEW243608 ①
781.1 (30.75)	1092.2 (43.00)	382.5 (15.06)	463.6 (18.25)	711.2 (28.00)	1016.0 (40.00)	736.6 (29.00)	616.0 (24.25)	920.8 (36.25)	247.7 (9.75)	41.4 (1.63)	152.4 (6.00)	4	204.1 (450)	AMH5	AJBEW243610 ①
914.4 (36.00)	1117.6 (44.00)	349.3 (13.75)	N/A	889.0 (35.00)	N/A	736.6 (29.00)	762.0 (30.00)	965.2 (38.00)	196.9 (7.75)	50.8 (2.00)	155.7 (6.13)	4	272.2 (600)	AMH6	AJBEW303808 ①
914.4 (36.00)	1117.6 (44.00)	509.5 (20.06)	N/A	889.0 (35.00)	N/A	736.6 (29.00)	762.0 (30.00)	965.2 (38.00)	196.9 (7.75)	196.9 (7.75)	155.7 (6.13)	4	362.9 (800)	AMH6	AJBEW303816 ①

\diamond For Groups B and C, all conduits must be sealed within 50.8 mm (2") of the enclosure.

① The G1 gray epoxy power coat option is provided as standard for these enclosure sizes.

AJBEW Cast Junction Box Options and Accessories

Explosionproof, Dust-Ignitionproof

NEC/CEC:

Class I, Division 1 and 2, Groups B \diamond , C \diamond , D
 Class I, Zone 1 and 2, Groups IIA, IIB \diamond +H₂ \diamond
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 NEMA 4, 7B \diamond C \diamond D, 9EFG

Mounting Pans

Mounting Pan Catalog Number	Junction Box Catalog Number	Overall Dimensions in Millimeters (Inches)	
		W	H
AZ-464	AJBEW040604	76.2 (3.00)	127.0 (5.00)
AZ-664	AJBEW060604	120.7 (4.75)	120.7 (4.75)
AZ-684	AJBEW060806	114.3 (4.50)	165.1 (6.50)
AZ-593	AJBEW050903	101.6 (4.00)	215.9 (8.50)
AZ-684	AJBEW060804	114.3 (4.50)	165.1 (6.50)
AZ-6104	AJBEW061004	127.0 (5.00)	266.7 (10.50)
AZ-6124	AJBEW061204	139.7 (5.50)	279.4 (11.00)
AZ-6164	AJBEW061604	133.4 (5.25)	381.0 (15.00)
AZ-7116	AJBEW071106	165.1 (6.50)	254.0 (10.00)
AZ-886	AJBEW080806	165.1 (6.50)	165.1 (6.50)
AZ-8106	AJBEW081006	165.1 (6.50)	215.9 (8.50)
AZ-8137	AJBEW081307	152.4 (6.00)	279.4 (11.00)
AZ-9115	AJBEW091105	209.6 (8.25)	254.0 (10.00)
AZ-9154	AJBEW091504	206.5 (8.13)	374.7 (14.75)
AZ-10104/6	AJBEW101006	190.5 (7.50)	190.5 (7.50)
AZ-10146/8	AJBEW101408	228.6 (9.00)	330.2 (13.00)
AZ-10146/8	AJBEW101408	228.6 (9.00)	330.2 (13.00)
AZ-11205	AJBEW112005	266.7 (10.50)	482.6 (19.00)
AZ-11246	AJBEW112406	251.0 (9.88)	590.6 (23.25)
AZ-11306	AJBEW113006	251.0 (9.88)	723.9 (28.50)
AZ-12126/8	AJBEW121206	266.7 (10.50)	266.7 (10.50)
AZ-12126/8	AJBEW121208	266.7 (10.50)	266.7 (10.50)
AZ-12186/8	AJBEW121806	266.7 (10.50)	419.1 (16.50)
AZ-12186/8	AJBEW121808	266.7 (10.50)	419.1 (16.50)
AZ-12248/10	AJBEW122408	273.1 (10.75)	574.8 (22.63)
AZ-12368	AJBEW123608	254.0 (10.00)	863.6 (34.00)
AZ-13386	AJBEW133806	292.1 (11.50)	924.1 (36.38)

Mounting Pan Catalog Number	Junction Box Catalog Number	Overall Dimensions in Millimeters (Inches)	
		W	H
AZ-14146/8	AJBEW141406	311.2 (12.25)	311.2 (12.25)
AZ-14146/8	AJBEW141408	311.2 (12.25)	311.2 (12.25)
AZ-14248	AJBEW142408	355.6 (14.00)	568.5 (22.38)
AZ-15377	AJBEW153707	368.3 (14.50)	901.7 (35.50)
AZ-16166/8	AJBEW161606	381.0 (15.00)	381.0 (15.00)
AZ-16166/8	AJBEW161608	381.0 (15.00)	381.0 (15.00)
AZ-161812	AJBEW161812	381.0 (15.00)	406.4 (16.00)
AZ-16226	AJBEW162206	355.6 (14.00)	508.0 (20.00)
AZ-16248	AJBEW162408	374.7 (14.75)	577.9 (22.75)
AZ-16286	AJBEW162806	355.6 (14.00)	660.4 (26.00)
AZ-18186/8	AJBEW181806	406.4 (16.00)	406.4 (16.00)
AZ-18186/8	AJBEW181808	406.4 (16.00)	406.4 (16.00)
AZ-18248/10	AJBEW182408	406.4 (16.00)	558.8 (22.00)
AZ-18248/10	AJBEW182410	406.4 (16.00)	558.8 (22.00)
AZ-18308	AJBEW183008	406.4 (16.00)	711.2 (28.00)
AZ-18368/10	AJBEW183608	431.8 (17.00)	882.7 (34.75)
AZ-18368/10	AJBEW183610	431.8 (17.00)	882.7 (34.75)
AZ-18427	AJBEW184207	431.8 (17.00)	1016.0 (40.00)
AZ-205610	AJBEW205610	431.8 (17.00)	1371.6 (54.00)
AZ-20608	AJBEW206008	457.2 (18.00)	1460.5 (57.50)
AZ-24248/10	AJBEW242408	558.8 (22.00)	558.8 (22.00)
AZ-24248/10	AJBEW242410	558.8 (22.00)	558.8 (22.00)
AZ-24308	AJBEW243008	571.5 (22.50)	711.2 (28.00)
AZ-24368/10	AJBEW243608	558.8 (22.00)	863.6 (34.00)
AZ-24368/10	AJBEW243610	558.8 (22.00)	863.6 (34.00)
AZ-30388	AJBEW303808	711.2 (28.00)	914.4 (36.00)
AZ-30388	AJBEW303816	711.2 (28.00)	914.4 (36.00)

\diamond For Groups B and C, all conduits must be sealed within 50.8 mm (2") of the enclosure.


AJBEW Cast Junction Box Drilling and Tapping Guidelines

Explosionproof, Dust-Ignitionproof

NEC/CEC:

Class I, Division 1 and 2, Groups B \diamond , C \diamond , D
 Class I, Zone 1 and 2, Groups IIA, IIB \diamond +H \diamond ₂ \diamond
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 NEMA 4, 7B \diamond C \diamond D, 9EFG

Dimensions — See Catalog Number Tables

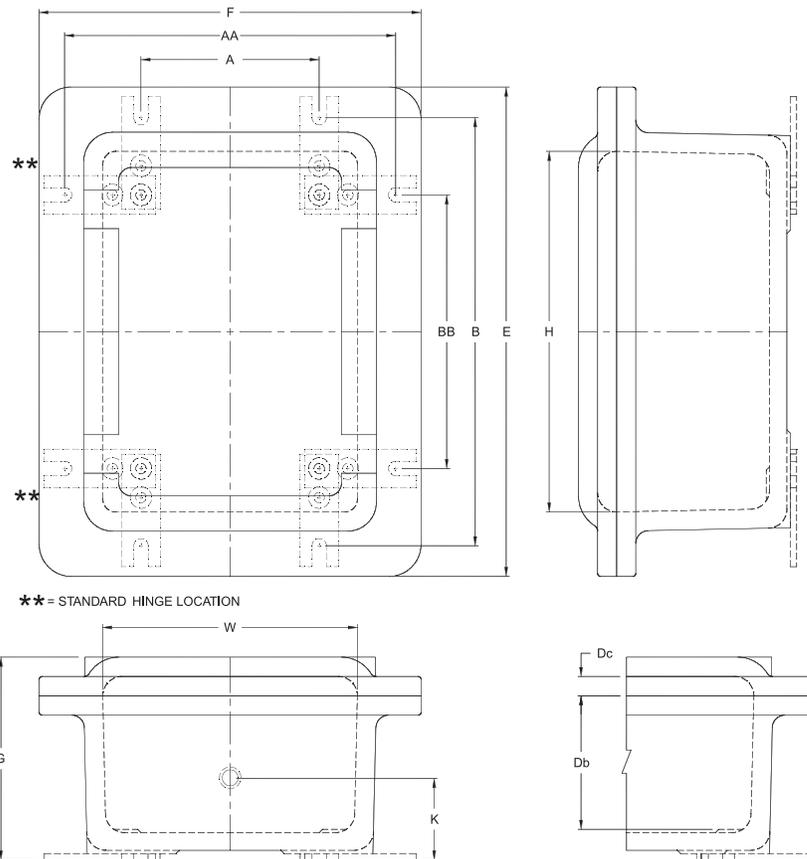

Drilling and Tapping Guidelines

Conduit Size (NPT)	Minimum Spacing For Conduit Centers in Millimeters (Inches)									
	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	3-1/2	4
1/2	54.1 (2.13)	54.1 (2.13)	57.2 (2.25)	66.8 (2.63)	71.4 (2.81)	79.5 (3.13)	92.2 (3.63)	101.6 (4.00)	114.3 (4.50)	114.3 (4.50)
3/4	54.1 (2.13)	54.1 (2.13)	57.2 (2.25)	66.8 (2.63)	71.4 (2.81)	79.5 (3.13)	92.2 (3.63)	101.6 (4.00)	114.3 (4.50)	114.3 (4.50)
1	57.2 (2.25)	57.2 (2.25)	60.5 (2.38)	71.4 (2.81)	76.2 (3.00)	82.6 (3.25)	95.3 (3.75)	104.9 (4.13)	114.3 (4.50)	117.6 (4.63)
1-1/4	66.8 (2.63)	66.8 (2.63)	71.4 (2.81)	79.5 (3.13)	84.1 (3.31)	92.2 (3.63)	104.9 (4.13)	114.3 (4.50)	120.7 (4.75)	127.0 (5.00)
1-1/2	71.4 (2.81)	71.4 (2.81)	76.2 (3.00)	84.1 (3.31)	88.9 (3.50)	96.8 (3.81)	109.5 (4.31)	117.6 (4.63)	125.5 (4.94)	133.4 (5.25)
2	79.5 (3.13)	79.5 (3.13)	82.6 (3.25)	92.2 (3.63)	96.8 (3.81)	104.9 (4.13)	117.6 (4.63)	127.0 (5.00)	148.1 (5.83)	146.1 (5.75)
2-1/2	92.2 (3.63)	92.2 (3.63)	95.3 (3.75)	104.9 (4.13)	109.5 (4.31)	117.6 (4.63)	130.3 (5.13)	84.1 (3.31)	146.1 (5.75)	155.7 (6.13)
3	101.6 (4.00)	101.6 (4.00)	104.9 (4.13)	114.3 (4.50)	117.6 (4.63)	127.0 (5.00)	84.1 (3.31)	146.1 (5.75)	152.4 (6.00)	158.8 (6.25)
3-1/2	114.3 (4.50)	114.3 (4.50)	114.3 (4.50)	120.7 (4.75)	125.5 (4.94)	136.7 (5.38)	146.1 (5.75)	152.4 (6.00)	158.8 (6.25)	165.1 (6.50)
4	114.3 (4.50)	114.3 (4.50)	117.6 (4.63)	127.0 (5.00)	133.4 (5.25)	146.1 (5.75)	155.7 (6.13)	158.8 (6.25)	165.1 (6.50)	171.5 (6.75)

\diamond For Groups B and C, all conduits must be sealed within 50.8 mm (2") of the enclosure.