

ALPN, AGPN and APPN Series Distribution Panelboards

Explosionproof, Dust-Ignitionproof, Watertight, Non-Factory Sealed

NEC:
 Class I, Division 1 and 2, Groups B, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 Class I, Zone 1, Group IIB +H₂
 NEMA 4, 4X, 7BCD, 9EFG

DISTRIBUTION EQUIPMENT: NEC/CEC HAZARDOUS LOCATION PANELBOARDS

Applications

- Distribution panelboards are used to furnish protection and control of electrical equipment in hazardous locations. These compact units provide a centrally controlled switching system for large quantities of branch circuits for:
 - Lighting
 - Heating
 - Small motors
 - Similar electrical equipment

Features

- Breaker operators included as standard.
- O-ring gasket insures watertight integrity.
- Permits selection of 1-, 2- or 3-pole breakers.
- Precision machined flame path between body and cover.
- Slotted mounting feet.
- Breaker operators can be padlocked in the ON or OFF position.
- All panelboards are supplied with Cutler-Hammer[®] standard Quicklag[®] breakers.
- Chassis assemblies with mains at top (bottom optional).
- For standard outlets, see outline dimensions. For custom outlets, contact your local representative.
- Provisions for 12, 18, 24, 30, 36 and 42 circuit 1-pole chassis.
- 100 Amp or 225 Amp main lug.
- Up to 100 Amp backfed main breaker available with main lug chassis.
- Up to 225 Amp main breaker available with main breaker chassis.
- Factory installed ground and neutral bar as standard.

Standard Materials

- Bodies and covers: copperfree (4/10 of 1% max.) aluminum
- Cover bolts: Quad-Lead[®], captive, stainless steel
- Breaker operators: copperfree (4/10 of 1% max.) aluminum
- Hinges: stainless steel
- Bus bars: copper
- O-ring: neoprene

Standard Finishes

- Corrosion resistant gray epoxy powder coat to provide NEMA 4X rating

Options

Must be listed in alphanumeric sequence at the end of the catalog number.

- Panel Options
 - Breather, NEMA 4X, 7 and 9, add suffix —**BR**.
 - Drain, NEMA 4X, 7 and 9, add suffix —**DN**.
 - Phenolic nameplate (specify legend), add suffix —**NP**.
 - For +50 °C (+122 °F) breaker rating, add suffix —**V**.
- Main Breaker Options ALPN and APPN Only
 - Auxiliary switch (1A or 1B), add suffix —**AS1**.
 - Auxiliary switch (2A or 2B), add suffix —**AS2**.
 - Main breaker located at bottom, add suffix —**LB**.
 - Shunt trip (specify voltage), add suffix —**ST**.
 - Under voltage release (specify voltage), add suffix —**UV**.



ALPN



APPN

AGPN shown with MB and INV options

- Branch Breaker Option ALPN and AGPN Only
 - Equipment Protection Devices (1- or 2-Pole -30 mA sensitivity) ⊕ add suffix —**EPD**.
 - Ground Fault Interrupter (1- or 2-Pole -5 mA sensitivity), ⊕ add suffix —**GFI**.
 - GFI Indicating Light, add suffix —**L5**.
- Branch Breaker Options APPN F-Frame Only
 - Auxiliary switch (1A or 1B), add suffix —**AS1**.
 - Auxiliary switch (2A or 2B), add suffix —**AS2**.
 - Shunt trip (specify voltage), add suffix —**ST**.
 - Under voltage release (specify voltage), add suffix —**UV**.

NEC Certifications and Compliances

- UL Standard: UL 1203
- UL Classified: E84577

⊕ GFI Push-to-Test Buttons are standard with GFI or EPD options.

+ Cutler-Hammer is a trademark of the Eaton Corporation.

ALPN Series Lighting Distribution Panelboards

Explosionproof, Dust-Ignitionproof, Watertight, Non-Factory Sealed

NEC:
 Class I, Division 1 and 2, Groups B, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 Class I, Zone 1, Group IIB +H₂
 NEMA 4, 4X, 7BCD, 9EFG


DISTRIBUTION EQUIPMENT: NEC/CEC HAZARDOUS LOCATION PANELBOARDS

	Number of Circuits	120/240V 1-Phase 3-Wire BAB Type	120/208V 3-Phase 4-Wire BAB Type	240V 3-Phase 3-Wire Delta BAB Type	Panel Size	Approximate Weight kgs (lbs)
100 Amp Main Lug Only	12	ALPNA11A12ML □	ALPNA12C12ML □	ALPNA15B12ML □	A	61.23 (135)
	18	ALPNB11A18ML □	ALPNB12C18ML □	ALPNB15B18ML □	B	74.84 (165)
	24	ALPNC11A24ML □	ALPNC12C24ML □	ALPNC15B24ML □	C	95.25 (210)
	30	ALPNC11A30ML □	ALPNC12C30ML □	ALPNC15B30ML □	C	97.52 (215)
225 Amp Main Lug Only	18	ALPNC21A18ML □	ALPNC22C18ML □	ALPNC25B18ML □	C	81.65 (180)
	24	ALPNC21A24ML □	ALPNC22C24ML □	ALPNC25B24ML □	C	104.33 (230)
	30	ALPNC21A30ML □	ALPNC22C30ML □	ALPNC25B30ML □	C	106.59 (235)
	36	ALPND21A36ML □	ALPND22C36ML □	ALPND25B36ML □	D	131.54 (290)
	42	ALPND21A42ML □	ALPND22C42ML □	ALPND25B42ML □	D	133.81 (295)
Main Breaker 100 Amp F	12	ALPNC11A12MB100 □	ALPNC12C12MB100 □	ALPNC15B12MB100 □	C	74.84 (165)
	18	ALPNC11A18MB100 □	ALPNC12C18MB100 □	ALPNC15B18MB100 □	C	81.65 (180)
	24	ALPND11A24MB100 □	ALPND12C24MB100 □	ALPND15B24MB100 □	D	95.25 (210)
	30	ALPND11A30MB100 □	ALPND12C30MB100 □	ALPND15B30MB100 □	D	142.88 (315)
Main Breaker 225 Amp F	18	ALPNC21A18MB225 □	ALPNC22C18MB225 □	ALPNC25B18MB225 □	C	83.91 (185)
	24	ALPND21A24MB225 □	ALPND22C24MB225 □	ALPND25B24MB225 □	D	133.81 (295)
	30	ALPND21A30MB225 □	ALPND22C30MB225 □	ALPND25B30MB225 □	D	136.08 (300)
	36	ALPND21A36MB225 □	ALPND22C36MB225 □	ALPND25B36MB225 □	D	138.35 (305)
	42	ALPNF21A42MB225 □	ALPNF22C42MB225 □	ALPNF25B42MB225 □	F	156.49 (345)


Note: For Back Fed main, replace **ML**, **MB100**, or **MB225** in part number with **BF**. For 400 Amp Main Lug, contact your local representative. Standard interrupting capacity is 10,000 AIC. For higher interrupt ratings, contact your local representative.

Typical Panelboard Wiring Diagram

1-Phase, 3-Wire Systems

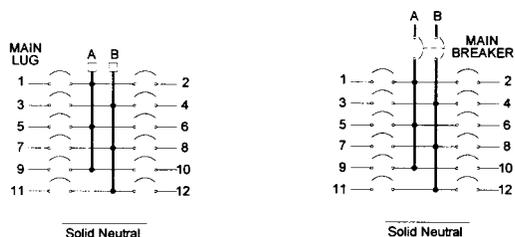

3-Phase, 4-Wire Systems

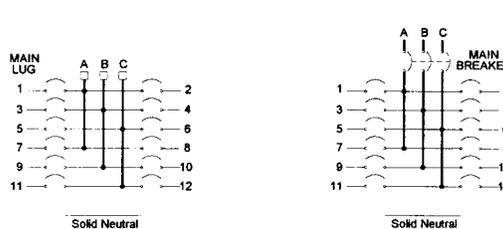

▲ To complete the catalog number please add the appropriate suffix for other options/features. These suffixes can be found under Options.







ALPN, AGPN and APPN Series Distribution Panelboards

Explosionproof, Dust-Ignitionproof, Watertight, Non-Factory Sealed

NEC:
 Class I, Division 1 and 2, Groups B, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 Class I, Zone 1, Group IIB +H₂
 NEMA 4, 4X, 7BCD, 9EFG

DISTRIBUTION EQUIPMENT: NEC/CEC HAZARDOUS LOCATION PANELBOARDS

ALPN, APPN Main Lug Panelboard and Mounting Hardware

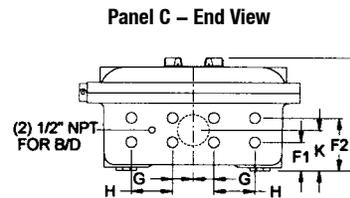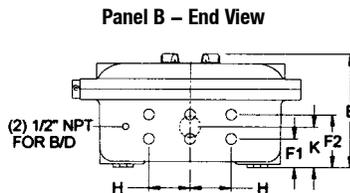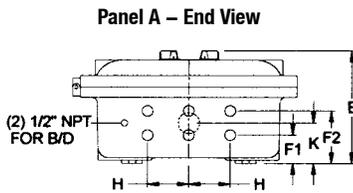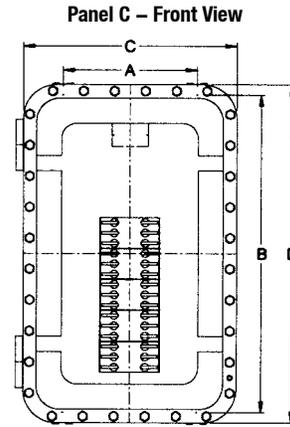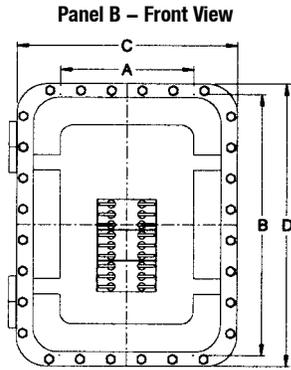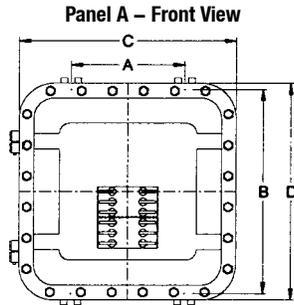

Panel Size	Mounting Dimensions in Millimeters (Inches)										Standard Top	Outlets Bottom	Mounting Hdw. Set
	A	B	C	D	E	F1	F2	G	H	K			
A	279.4 (11.00)	501.6 (19.75)	533.4 (21.00)	533.4 (21.00)	279.4 (11.00)	69.8 (2.75)	130.3 (5.13)	—	101.6 (4.00)	100.0 (3.94)	1 - 50.8 (2.00)	6 - 25.4 (1.00)	AMH8
B	330.2 (13.00)	641.3 (25.25)	544.5 (21.44)	693.6 (27.31)	279.4 (11.00)	69.8 (2.75)	130.3 (5.13)	—	101.6 (4.00)	100.0 (3.94)	1 - 50.8 (2.00)	6 - 25.4 (1.00)	AMH8
C	330.2 (13.00)	781.0 (30.75)	527.0 (20.75)	931.8 (32.75)	279.4 (11.00)	69.8 (2.75)	130.3 (5.13)	50.8 (2.00)	101.6 (4.00)	100.0 (3.94)	1 - 50.8 (2.00)	8 - 25.4 (1.00)	AMH8



Note: All outlets are NPT.

ALPN, AGPN and APPN Series Distribution Panelboards

Explosionproof, Dust-Ignitionproof, Watertight, Non-Factory Sealed

NEC:
 Class I, Division 1 and 2, Groups B, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 Class I, Zone 1, Group IIB +H₂
 NEMA 4, 4X, 7BCD, 9EFG

ALPN, APPN Main Lug Panelboard and Mounting Hardware

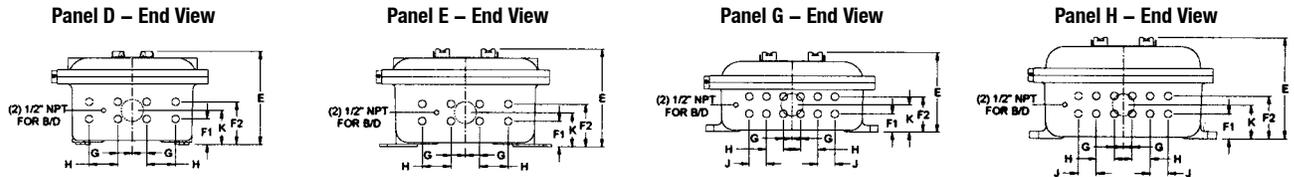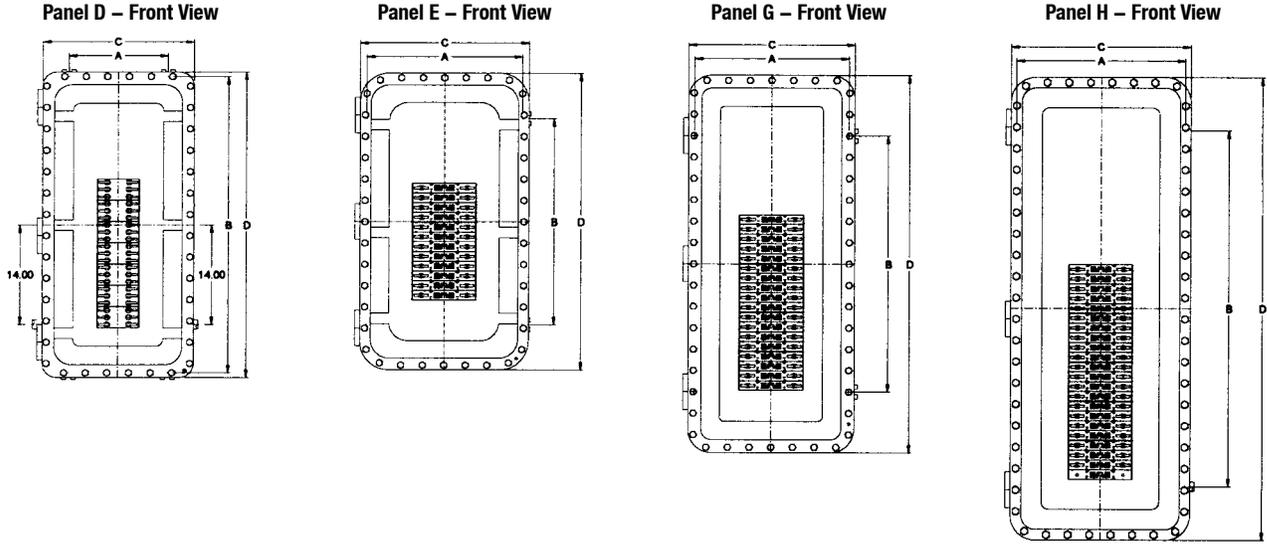

Panel Size	Mounting Dimensions in Millimeters (Inches)											Standard Top	Outlets Bottom	Mounting Hdw. Set
	A	B	C	D	E	F1	F2	G	H	J	K			
D	349.2 (13.75)	1057.4 (41.63)	533.4 (21.00)	1090.6 (42.94)	330.2 (13.00)	90.4 (3.56)	150.8 (5.94)	50.8 (2.00)	—	101.6 (4.00)	120.6 (4.75)	1 - 76.2 (3.00)	8 - 25.4 (1.00)	AMH8
E	552.45 (21.75)	736.6 (29.00)	596.9 (23.50)	1060.4 (41.75)	346.2 (13.63)	90.4 (3.56)	150.8 (5.94)	50.8 (2.00)	—	101.6 (4.00)	120.6 (4.75)	1 - 76.2 (3.00)	8 - 25.4 (1.00)	AMH8
G	543.0 (21.38)	914.4 (36.00)	584.2 (23.00)	1346.3 (53.00)	279.4 (11.00)	63.5 (2.50)	123.9 (4.88)	30.2 (1.19)	60.4 (2.38)	60.4 (2.38)	88.9 (3.50)	1 - 76.2 (3.00)	12 - 25.4 (1.00)	AMH6
H	596.9 (23.50)	1270.0 (50.00)	635.0 (25.00)	1651.0 (65.00)	355.6 (14.00)	87.3 (3.44)	150.8 (5.94)	31.7 (1.25)	63.5 (2.50)	63.5 (2.50)	119.1 (4.69)	1 - 76.2 (3.00)	12 - 25.4 (1.00)	AMH6

Note: All outlets are NPT.

ALPN, AGPN and APPN Series Distribution Panelboards


Explosionproof, Dust-Ignitionproof, Watertight, Non-Factory Sealed

NEC:
 Class I, Division 1 and 2, Groups B, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 Class I, Zone 1, Group IIB +H₂
 NEMA 4, 4X, 7BCD, 9EFG


DISTRIBUTION EQUIPMENT: NEC/CEC HAZARDOUS LOCATION PANELBOARDS

ALPN, APPN Main Breaker Panelboard and Mounting Hardware


Panel C – Front View

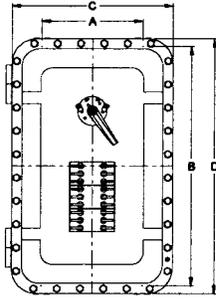


Panel D – Front View

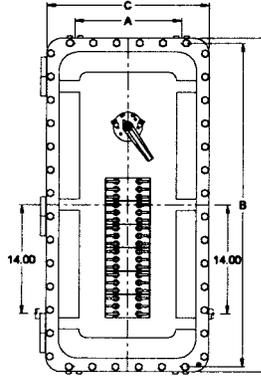


Panel E – Front View

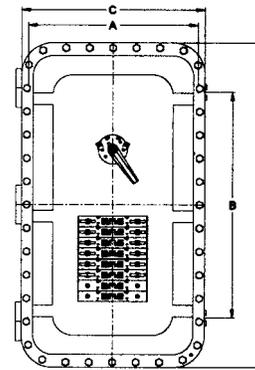


Panel C – End View

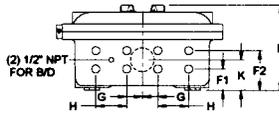

Panel D – End View

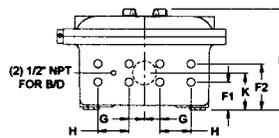

Panel E – End View

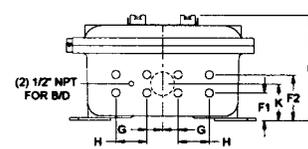

Panel Size	Mounting Dimensions in Millimeters (Inches)										Standard Top	Outlets Bottom	Mounting Hdw. Set
	A	B	C	D	E	F1	F2	G	H	K			
C	349.2 (13.75)	781.0 (30.75)	527.0 (20.75)	931.8 (32.75)	279.4 (11.00)	69.8 (2.75)	130.3 (5.13)	50.8 (2.00)	101.6 (4.00)	100.0 (3.94)	1 - 76.2 (3.00)	8 - 25.4 (1.00)	AMH8
D	349.2 (13.75)	1057.4 (41.63)	533.4 (21.00)	1090.6 (42.94)	330.2 (13.00)	90.4 (3.56)	150.8 (5.94)	50.8 (2.00)	101.6 (4.00)	120.6 (4.75)	1 - 76.2 (3.00)	8 - 25.4 (1.00)	AMH8
E	552.45 (21.75)	736.6 (29.00)	596.9 (23.50)	1060.4 (41.75)	346.2 (13.63)	90.4 (3.56)	150.8 (5.94)	50.8 (2.00)	101.6 (4.00)	120.6 (4.75)	1 - 76.2 (3.00)	8 - 25.4 (1.00)	AMH8

Note: All outlets are NPT.


ALPN, AGPN and APPN Series Distribution Panelboards

Explosionproof, Dust-Ignitionproof, Watertight, Non-Factory Sealed


NEC:
 Class I, Division 1 and 2, Groups B, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 Class I, Zone 1, Group IIB +H₂
 NEMA 4, 4X, 7BCD, 9EFG

ALPN, APPN Main Breaker Panelboard and Mounting Hardware


Panel F – Front View

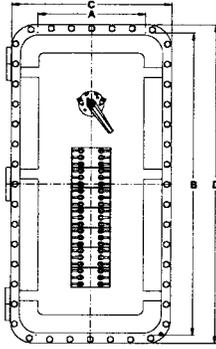


Panel G – Front View

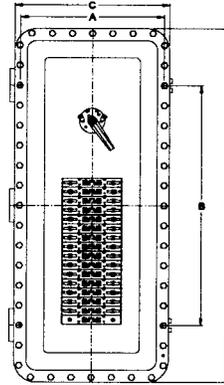


Panel H – Front View

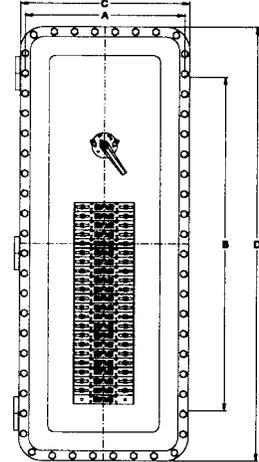


Panel F – End View

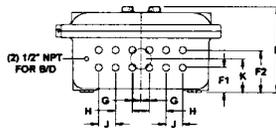

Panel G – End View

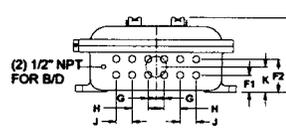

Panel H – End View

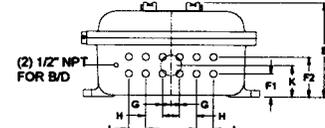

Panel Size	Mounting Dimensions in Millimeters (Inches)											Standard Top	Outlets Bottom	Mounting Hdw. Set
	A	B	C	D	E	F1	F2	G	H	J	K			
F	406.4 (16.00)	1152.6 (45.38)	603.2 (23.75)	1212.8 (47.75)	325.3 (12.81)	93.7 (3.69)	160.2 (6.31)	31.7 (1.25)	63.5 (2.50)	63.5 (2.50)	127.0 (5.00)	1 - 76.2 (3.00)	12 - 25.4 (1.00)	AMH8
G	543.0 (21.38)	914.4 (36.00)	584.2 (23.00)	1346.2 (53.00)	279.4 (11.00)	63.5 (2.50)	123.9 (4.88)	30.2 (1.19)	60.4 (2.38)	60.4 (2.38)	88.9 (3.50)	1 - 76.2 (3.00)	12 - 25.4 (1.00)	AMH6
H	596.9 (23.50)	1270.0 (50.00)	635.0 (25.00)	1651.0 (65.00)	355.6 (14.00)	87.3 (3.44)	150.8 (5.94)	31.7 (1.25)	63.5 (2.50)	63.5 (2.50)	119.1 (4.69)	1 - 76.2 (3.00)	12 - 25.4 (1.00)	AMH6

Note: All outlets are NPT.

Visit our website at www.appleton.emerson.com or contact us at (800) 621-1506.
 © May 2022

DISTRIBUTION EQUIPMENT: NEC/CEC HAZARDOUS LOCATION PANELBOARDS

APPLETON

ALPN, AGPN and APPN Series Distribution Panelboards


Explosionproof, Dust-Ignitionproof, Watertight, Non-Factory Sealed

NEC:
 Class I, Division 1 and 2, Groups B, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 Class I, Zone 1, Group IIB +H₂
 NEMA 4, 4X, 7BCD, 9EFG


DISTRIBUTION EQUIPMENT: NEC/IEC HAZARDOUS LOCATION PANELBOARDS

AGPN Series Ground Fault Interrupting Distribution Panelboard and Mounting Hardware


Panel AA – Front View




Panel A – Front View




Panel B – Front View

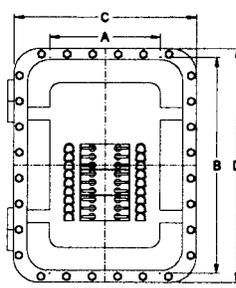


Panel C – Front View

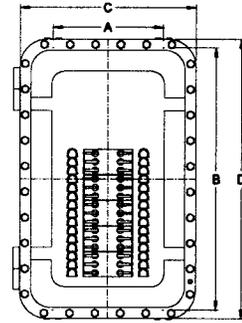


Panel AA – End View




Panel A – End View

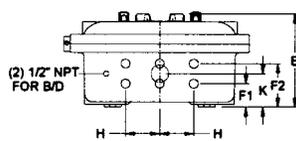

Panel B – End View

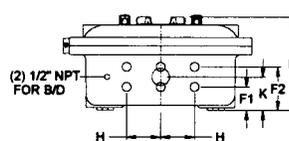

Panel C – End View

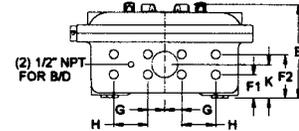

Panel Size	Mounting Dimensions in Millimeters (Inches)										Standard Top	Outlets Bottom	Mounting Hdw. Set
	A	B	C	D	E	F1	F2	G	H	K			
AA	184.1 (7.25)	333.5 (13.13)	352.5 (13.88)	393.7 (15.50)	242.8 (9.56)	60.4 (2.38)	—	26.9 (1.06)	54.1 (2.13)	60.4 (2.38)	1 - 25.4 (1.00)	4 - 19.0 (0.75)	AMH2
A	279.4 (11.00)	501.6 (19.75)	533.4 (21.00)	533.4 (21.00)	279.4 (11.00)	69.8 (2.75)	130.3 (5.13)	—	101.6 (4.00)	100.0 (3.94)	1 - 50.8 (2.00)	6 - 25.4 (1.00)	AMH8
B	330.2 (13.00)	641.3 (25.25)	544.5 (21.44)	693.6 (27.31)	279.4 (11.00)	69.8 (2.75)	130.3 (5.13)	—	101.6 (4.00)	100.0 (3.94)	1 - 50.8 (2.00)	6 - 25.4 (1.00)	AMH8
C	330.2 (13.00)	781.0 (30.75)	527.0 (20.75)	831.8 (32.75)	279.4 (11.00)	69.8 (2.75)	130.3 (5.13)	50.8 (2.00)	101.6 (4.00)	100.0 (3.94)	1 - 50.8 (2.00)	8 - 25.4 (1.00)	AMH8

Note: All outlets are NPT.