

Unicode™ 2 Series Pre-Drilled Control Stations

Increased Safety

Polyamide, Fiberglass Reinforced Polyester, 316L Stainless Steel, Aluminum

NEC:

Class I, Division 2, Groups A, B, C, D
Class II, Groups F, G
Class III
Ex de IIC/DIP A21
IP66, Type 4X[Ⓛ]

CEC:

Class I, Division 2, Groups A, B, C, D
Class II, Groups F, G
Class III; Type 4X[Ⓛ]
Class I, Zone 1, AEx de IIC/ AEx tD 21
IP66

ATEX/IECEX:

Zone 1 and 2 – 21 and 22
Ⓢ II 2 GD
Ex de IIC/Ex demb IIC/ Ex tD A21
IP66 – IK10

Applications

- Local control stations and motor control stations for use in hazardous areas covering the broadest possible range of applications.
- Control of equipment at:
 - Power plants
 - Chemical and petrochemical plants
 - Petroleum refineries
 - Reverse osmosis plants
 - Pulp and paper processing plants
 - Various industrial applications
- For use in washdown areas.

Features

- Enclosures are rated for IP66 with firmly secured gasket.
- Captive, corrosion resistant stainless steel cover screws.

Standard Materials

- Polyamide
 - Body, cover, cable gland and blanking plug: polyamide, black finish
- Polyester
 - Body and cover: fiberglass reinforced polyester, black finish.
- Stainless Steel
 - Body, cover and cover screws: 316L stainless steel, natural finish
- Aluminum
 - Body and cover: aluminum with gray epoxy powder coating.
- Cable gland and blanking plug: polyamide
- Cover screws for 316L stainless steel or aluminum body: 304 stainless steel
- Cover screws for fiberglass reinforced polyester body: 316 stainless steel
- Nameplate: white self-adhesive laminated plastic

NEC/CEC Certifications and Compliances

- Fiberglass Reinforced Polyester (FRP)
 - Certification Type CSPe
 - Temperature Class: T5 or T6
 - Ambient Temperature: -55°C to +60°C (-67°F to +140°F)
 - CAN/CSA Standards: C22.2 No. 0-M91, No. 25-M66, No. 213-M1987, No. 94-M91, No. 60079-0:07, No. 60529-2005, E60079-7-2003
 - UL Standards: 60079-0, 60079-7, 50
 - Other Standards: ANSI/IEC 60529-2004, ANSI/ISA 12.12.01-2011
 - cCSAus Certificate: 2356952
- Stainless Steel
 - Certification Type JBe
 - Temperature Class: T6 (at +40°C) or T5 (at +55°C)
 - Surface Temperature: T80 °C (at +40°C) to T95 °C (at +55°C) (T176 °F to T203 °F)
 - Ambient Temperature: -40 °C to +55 °C (-40 °F to +131°F)
 - CAN/CSA Standard: C22.2 No. 0-M91, No. 25-M66, No. 213-M1987, No. 60079-0:07, No. 60529-2005, E60079-7-2003
 - UL Standard: 60079-0, 60079-7
 - Other Standards: ANSI/IEC60529-2004, ANSI/ISA 12.12.01-2011
 - cCSAus Certificate: 2356734



Polyamide U43W211



Polyester U23W211



Stainless Steel U62W229



Aluminum U83W211

ATEX/IECEX Certifications and Compliances

- Polyamide
 - Certification Type PCe
 - Gas: Zone 1 and 2
 - Conforming to ATEX 94/9/CE: Ⓢ II 2 G
 - Type of Protection: Ex de IIC or Ex demb IIC
 - Temperature Class: T6
 - Dust: Zone 21 and 22
 - Conforming to ATEX 94/9/CE: Ⓢ II 2 D
 - Type of Protection: Ex tD A21
 - Surface Temperature: T167 °C to T75 °C (T333 °F to T167 °F)
 - Ambient Temperature: -20 °C to +55 °C (-4 °F to +131 °F)
 - CE Declaration of Conformity: 50221
 - ATEX Certificate: LCIE 00 ATEX 6047
 - IEC Certificate: LCIE Ex 00.017
 - Index of Protection according EN/IEC 60529: IP66
 - Impact Resistance (shock): IK10

[Ⓛ] Overall hazardous location and ingress protection rating depends on the rating of the optional certified components used.

Unicode™ 2 Series Pre-Drilled Control Stations

Increased Safety

Polyamide, Fiberglass Reinforced Polyester, 316L Stainless Steel, Aluminum

NEC:

Class I, Division 2, Groups A, B, C, D
Class II, Groups F, G
Class III
Ex de IIC/DIP A21
IP66, Type 4X^①

CEC:

Class I, Division 2, Groups A, B, C, D
Class II, Groups F, G
Class III; Type 4X^①
Class I, Zone 1, AEx de IIC/ AEx tD 21
IP66

ATEX/IECEX:

Zone 1 and 2 – 21 and 22
⊕ II 2 GD
Ex de IIC/Ex demb IIC/ Ex tD A21
IP66 – IK10

CONTROLS: NEC/CEC, ATEX/IECEX INCREASED SAFETY CONTROL STATIONS

APPLETON™

- Fiberglass Reinforced Polyester (FRP)
 - Certification Type CSPe
 - Gas: Zone 1 and 2
 - Conforming to ATEX 94/9/CE: ⊕ II 2 G
 - Type of Protection: Ex de IIC or Ex demb IIC
 - Temperature Class: T6
 - Dust: Zone 21 and 22
 - Conforming to ATEX 94/9/CE: ⊕ II 2 D
 - Type of Protection: Ex tD A21
 - Surface Temperature: T75 °C (T167 °F)
 - Ambient Temperature: -55 °C to +70 °C (-67 °F to +158 °F)
 - CE Declaration of Conformity: 52084
 - ATEX Certificate: LCIE 00 ATEX 3032X
 - IECEX Certificate: IECEX LCI 09.0016X
 - Index of Protection according EN/IEC 60529: IP66
 - Impact Resistance (shock): IK10
- Stainless Steel
 - Certification Type JBe
 - Gas: Zone 1 and 2
 - Conforming to ATEX 94/9/CE: ⊕ II 2 G
 - Type of Protection: Ex de IIC or Ex demb IIC
 - Temperature Class: T5 to T6
 - Dust: Zone 21 and 22
 - Conforming to ATEX 94/9/CE: ⊕ II 2 D
 - Type of Protection: Ex tD A21
 - Surface Temperature: T80 °C to T95 °C (T176 °F to T203 °F)
 - Ambient Temperature: -50 °C to +70 °C (-58 °F to +158 °F)
 - CE Declaration of Conformity: 50232
 - ATEX Certificate: LCIE 02 ATEX 6118X
 - IECEX Certificate: LCI 11.0008X
 - Index of Protection according EN/IEC 60529: IP66
 - Impact Resistance (shock): IK10
- Aluminum
 - Certification Type PCe
 - Gas: Zone 1 and 2
 - Conforming to ATEX 94/9/CE: ⊕ II 2 G
 - Type of Protection: Ex de IIC or Ex demb IIC
 - Temperature Class: T6
 - Dust: Zone 21 and 22
 - Conforming to ATEX 94/9/CE: ⊕ II 2 D
 - Type of Protection: Ex tD A21
 - Surface Temperature: T75 °C (T167 °F)
 - CE Declaration of Conformity: 50221
 - ATEX Certificate: LCIE 02 ATEX 6047
 - Index of Protection according EN/IEC 60529: IP66
 - Impact Resistance (shock): IK10

Other Certification ^②

- Certification Type PCe (Polyamide)
 - INMETRO Certificate: BVC 11.0640-X
- Certification Type CSPe (Polyester)
 - INMETRO Certificate: BVC 11.0637-X
- Certification Type JBe (Stainless Steel)
 - INMETRO Certificate: BVC 11.0418-X

EURASEC Certification

- Certification Type PCe (Polyamide)
 - EURASEC RU C-FR Г505.В.00911
- Certification Type CSPe (Polyester)
 - EURASEC RU C-FR Г505.В.00911
- Certification Type JBe (Stainless Steel)
 - EURASEC RU C-FR Г505.В.00911

^① Overall hazardous location and ingress protection rating depends on the rating of the optional certified components used.

^② INMETRO certification available on special request only. Contact your local sales representative for more information.

Unicode™ 2 Series Pre-Drilled Stainless Steel Control Stations

Increased Safety

NEC:
 Class I, Division 2, Groups A, B, C, D
 Class II, Groups F, G
 Class III
 Ex de IIC/DIP A21
 IP66, Type 4X^①

CEC:
 Class I, Division 2, Groups A, B, C, D
 Class II, Groups F, G
 Class III; Type 4X^①
 Class I, Zone 1, AEx de IIC/ AEx tD 21
 IP66


ATEX/IECEX:
 Zone 1 and 2 – 21 and 22
 II 2 GD
 Ex de IIC/Ex demb IIC/ Ex tD A21
 IP66 – IK10

CONTROLS: NEC/CEC, ATEX/IECEX INCREASED SAFETY CONTROL STATIONS

APPLETON™

Stainless Steel Pre-drilled Boxes for Control Stations

Included: 1 white self-adhesive laminated plastic nameplate (black lettering), clearance entries.



| Description/ Function | Entries | Weight kg (lb) | Volume dm ³ (in ³) | Catalog Number | | |
|--|---------|-------------------|--|----------------|----------------|----------------|
| | | | | 1 Bottom | 2 Bottom | Feed-Thru |
| Size 1 Pre-Drilled Enclosures | | | | | | |
| 01 For 1 actuator 1 vertical rail | M20 | | | U61W101 | U61W201 | U61U101 |
| | M25 | 1.0 (2.20) | 2.7 (164.76) | U61W301 | U61W401 | U61U301 |
| | 3/4" | | | U61Z301 | U61Z401 | U61X301 |
| 27 For 2 actuators 1 vertical rail | M20 | | | U61W127 | U61W227 | U61U127 |
| | M25 | 1.0 (2.20) | 2.7 (164.76) | U61W327 | U61W427 | U61U327 |
| | 3/4" | | | U61Z327 | U61Z427 | U61X327 |
| Size 2 Pre-Drilled Enclosures | | | | | | |
| 04 For 2 actuators 1 vertical rail | M20 | | | U62W104 | U62W204 | U62U104 |
| | M25 | 1.5 (3.31) | 3.6 (219.69) | U62W304 | U62W404 | U62U304 |
| | 3/4" | | | U62Z304 | U62Z404 | U62X304 |
| 29 For 3 actuators 1 vertical rail | M20 | | | U62W129 | U62W229 | U62U129 |
| | M25 | 1.5 (3.31) | 3.6 (219.69) | U62W329 | U62W429 | U62U329 |
| | 3/4" | | | U62Z329 | U62Z429 | U62X329 |
| 26 For 1 ammeter 48x48 + 1 actuator 1 vertical rail | M20 | | | U62W126 | U62W226 | U62U126 |
| | M25 | 1.5 (3.31) | 3.6 (219.69) | U62W326 | U62W426 | U62U326 |
| | 3/4" | | | U62Z326 | U62Z426 | U62X326 |
| Size 3 Pre-Drilled Enclosures | | | | | | |
| 30 For 4 actuators 2 vertical rails | M20 | | | U63W130 | U63W230 | U63U130 |
| | M25 | 1.8 (3.97) | 5.3 (323.43) | U63W330 | U63W430 | U63U330 |
| | 3/4" | | | U63Z330 | U63Z430 | U63X330 |
| 32 For 6 actuators 2 vertical rails | M20 | | | U63W132 | U63W232 | U63U132 |
| | M25 | 1.8 (3.97) | 5.3 (323.43) | U63W332 | U63W432 | U63U332 |
| | 3/4" | | | U63Z332 | U63Z432 | U63X332 |
| 33 For 1 ammeter 48 x 48 + 2 actuators 1 vertical rail (V) 1 horizontal rail (5-6) | M20 | | | U63W133 | U63W233 | U63U133 |
| | M25 | 1.8 (3.97) | 5.3 (323.43) | U63W333 | U63W433 | U63U333 |
| | 3/4" | | | U63Z333 | U63Z433 | U63X333 |

^① Overall hazardous location and ingress protection rating depends on the rating of the optional certified components used.

Unicode™ 2 Series Pre-Drilled Control Stations

Increased Safety

Polyamide, Fiberglass Reinforced Polyester, 316L Stainless Steel, Aluminum ①

NEC:

Class I, Division 2, Groups A, B, C, D
Class II, Groups F, G
Class III
Ex de IIC/DIP A21
IP66, Type 4X①

CEC:


Class I, Division 2, Groups A, B, C, D
Class II, Groups F, G
Class III; Type 4X①
Class I, Zone 1, AEx de IIC/ AEx tD 21
IP66

ATEX/IECEX:


Zone 1 and 2 – 21 and 22
II 2 GD
Ex de IIC/Ex demb IIC/ Ex tD A21
IP66 – IK10

Dimensions in Millimeters (Inches)

Polyamide

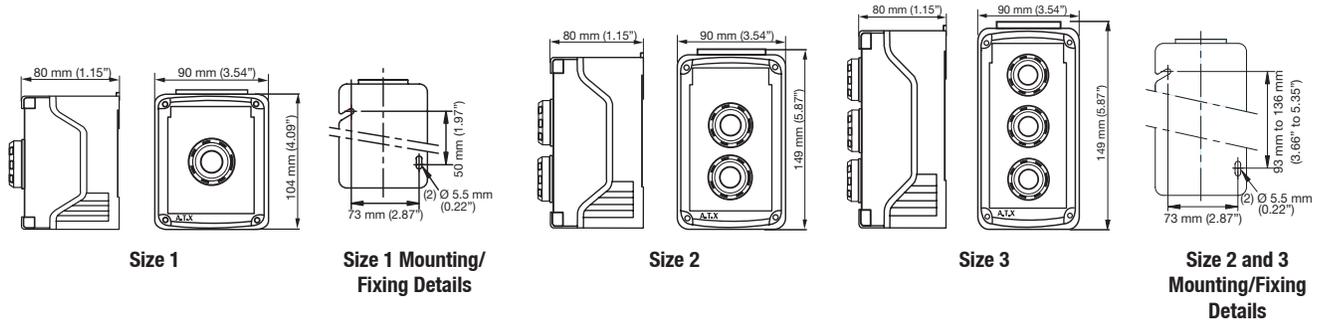


Fiberglass Reinforced Polyester

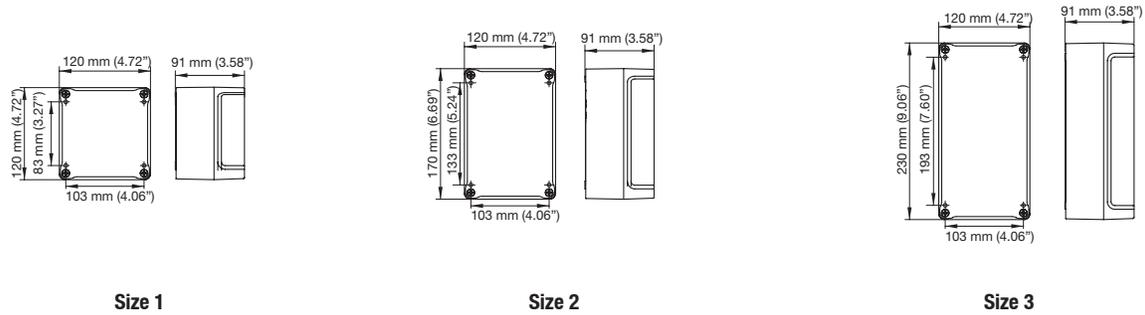


Mounting/Fixing Details for Above Boxes: Four Holes Ø 5 mm (0.20")

316L Stainless Steel

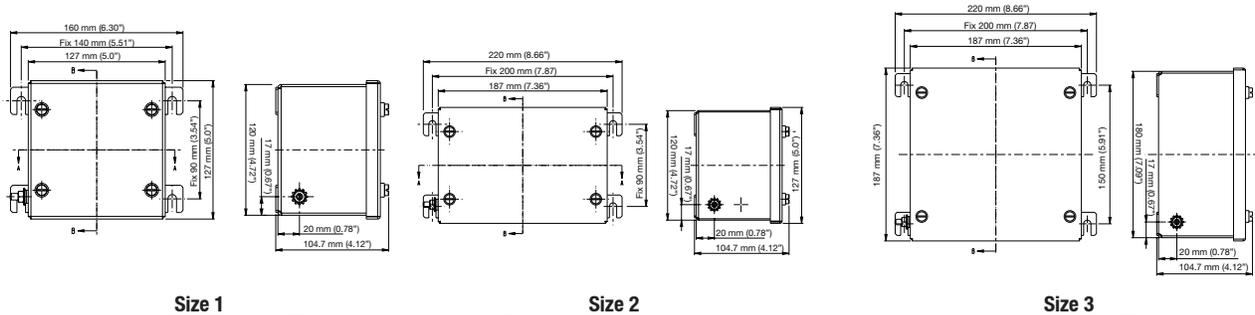

Aluminum

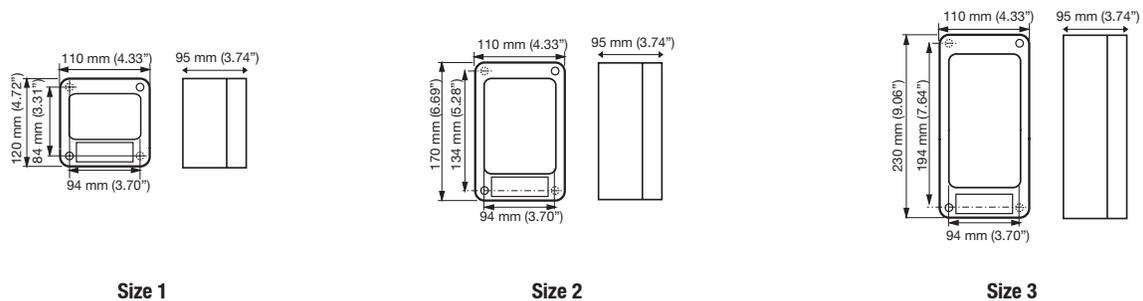

Mounting/Fixing Details for above Boxes: Two Holes Ø 5 mm (0.20")

① Overall hazardous location and ingress protection rating depends on the rating of the optional certified components used.