



FATH® T-Slotted Rail Accessories

Bases

- Recommended ADC Fastener based on part features and extrusion core hole
- Material: varies by part



10 Series Bases													
		Fits 											
Part Number	Part Image	Price	Diameter	Description	Fits	Load Rating kg [lb]	Recommended Screw Fastener (ADC Part Number)		Pack Quantity	Material	Drawing Link		
							Core Hole Attachment 1	T-Slot Attachment 2					
118356		\$16.00	n/a	1/4-20 UNC Transport/Base Plate	1 x 2in	n/a	161103 (2) included with kit			Die-cast zinc	PDF		
146399		\$16.00		3/8-16 UNC Transport/Base Plate							PDF		
151074		\$7.25		1/4-20 UNC x 1-1/2in Swivel Foot Threaded Rod with 15 mm ball	Transport/Base Plate 118356	210 [463]*	n/a		1	Zinc plated steel	PDF		
151075		\$4.50		3/8-16 UNC x 1-1/2in Swivel Foot Threaded Rod with 15 mm ball	Transport/Base Plate 146399	470 [1036]*				Zinc plated steel	PDF		
151068		\$4.00	1.57 in [39.0 mm]			900 [1984]						Nylon	PDF
151071		\$9.50				3000 [6614]						Die-cast zinc	PDF
151072		\$17.00				n/a	PDF						
151073		\$17.00	3.11 in [79.0 mm]	Swivel Base With Anti-Slip Plate	Any 15mm ball Threaded Rod	900 [1984]			Nylon	PDF			
151069		\$6.00								PDF			
151070		\$6.00								PDF			
151255		\$10.00								PDF			
151256		\$10.00	3.90 in [99.0 mm]			900 [1984]				PDF			


*Based on installation with Transport / Base Plate
 Load rating of a swivel foot assembly is based on the part with the lowest load rating, typically the threaded rod.
 Example:
 Threaded rod load rating = 210kg [463lb]
 Swivel base load rating = 3000kg [6614lb]
 Swivel foot assembly load rating = 210kg [463lb]

FATH® T-Slotted Rail Accessories

Bases - Continued


10 Series Bases - continued

Fits 



Part Number	Part Image	Price	Diameter	Description	Fits	Load Rating kg [lb]	Recommended Screw Fastener (ADC Part Number)		Pack Quantity	Material	Drawing Link		
							Core Hole Attachment 1	**T-Slot Attachment 2					
151257		\$24.00	3.90 in [99.0 mm]	Swivel Base With Anti-Slip Plate	Any 15mm ball Threaded Rod	3500 [7716]	n/a	2	1	Die-cast zinc	PDF		
151258		\$24.00											
162933		\$12.50	See Drawing Link	Extended Swivel Base	Any 15mm ball Threaded Rod	1000 [2204]				n/a	1	Nylon	PDF
162934		\$27.00										Die-cast zinc	PDF
162955		\$10.00	n/a	Floor Bracket	1 x 1in, 1 x 2in, 2 x 2in	n/a			Anodized aluminum	PDF			


*Based on installation with Transport / Base Plate
 Load rating of a swivel foot assembly is based on the part with the lowest load rating, typically the threaded rod.
 Example:
 Threaded rod load rating = 210kg [463lb]
 Swivel base load rating = 3000kg [6614lb]
 Swivel foot assembly load rating = 210kg [463lb]
 **T-Slot nut also required

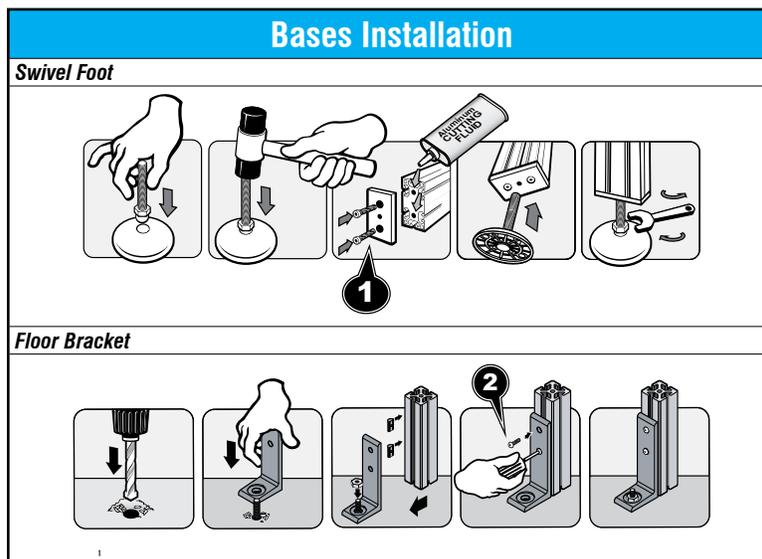

FATH® T-Slotted Rail Accessories

Bases

- Recommended ADC Fastener based on part feature and core hole
- Material: varies by part



15 Series Bases

Fits Slot Size 8




Part Number	Part Image	Price	Diameter	Description	Fits	Load Rating kg [lb]	Recommended Screw Fastener (ADC Part Number)		Pack Quantity	Material	Drawing Link	
							Core Hole Attachment 1	*T-Slot Attachment 2				
118357		\$17.00	n/a	3/8-16 UNC Transport/Base Plate	1.5 x 3in	n/a	161105 (2) included with kit	n/a	1	Die-cast zinc	PDF	
161043		\$28.00			3 x 3in						161105 (4) included with kit	PDF
151075		\$4.50		3/8-16 UNC x 1-1/2in Swivel Foot Threaded Rod with 15mm ball	Transport/Base Plate 118357 and 161043		470 [1036]**	n/a		n/a	1	Zinc plated steel
151068		\$4.00	1.57 in [39.0 mm]	Swivel Base With Anti-Slip Plate	Any 15mm ball Threaded Rod	900 [1984]	Nylon		PDF			
151071		\$9.50				3000 [6614]			Die-cast zinc			PDF
151072		\$17.00				3.11 in [79.0 mm]						PDF
151073		\$17.00	900 [1984]				Nylon		PDF			
151069		\$6.00							3500 [7716]			Die-cast zinc
151070		\$6.00	3.90 in [99.0 mm]				PDF					
151255		\$10.00				900 [1984]	Nylon		PDF			
151256		\$10.00							3500 [7716]			Die-cast zinc
151257		\$24.00				900 [1984]	Nylon					
151258		\$24.00	3500 [7716]						Die-cast zinc			PDF


*T-Slot Nut also required
 **Based on installation with Transport / Base Plate
 Load rating of a swivel foot assembly is based on the part with the lowest load rating, typically the threaded rod.
 Example:
 Threaded rod load rating = 210kg [463lb]
 Swivel base load rating = 3000kg [6614lb]
 Swivel foot assembly load rating = 210kg [463lb]

FATH® T-Slotted Rail Accessories

Bases - Continued

15 Series Bases - continued											
		Slot Size 8									
Part Number	Part Image	Price	Diameter	Description	Fits	Load Rating kg [lb]	Recommended Screw Fastener (ADC Part Number)		Pack Quantity	Material	Drawing Link
							Core Hole Attachment 1	*T-Slot Attachment 2			
162933		\$12.50	See 2D drawing	Extended Swivel Base	Any 15mm ball Threaded Rod	1000 [2204]	n/a		1	Nylon	PDF
162934		\$27.00				3000 [6613]					
162957		\$11.50	n/a	Floor Bracket	1.5 x 1.5 in, 1.5 x 3in, 3 x 3in	151100				Anodized aluminum	PDF


*T-Slot Nut also required
 **Based on installation with Transport / Base Plate
 Load rating of a swivel foot assembly is based on the part with the lowest load rating, typically the threaded rod.
 Example:
 Threaded rod load rating = 210kg [463lb]
 Swivel base load rating = 3000kg [6614lb]
 Swivel foot assembly load rating = 210kg [463lb]

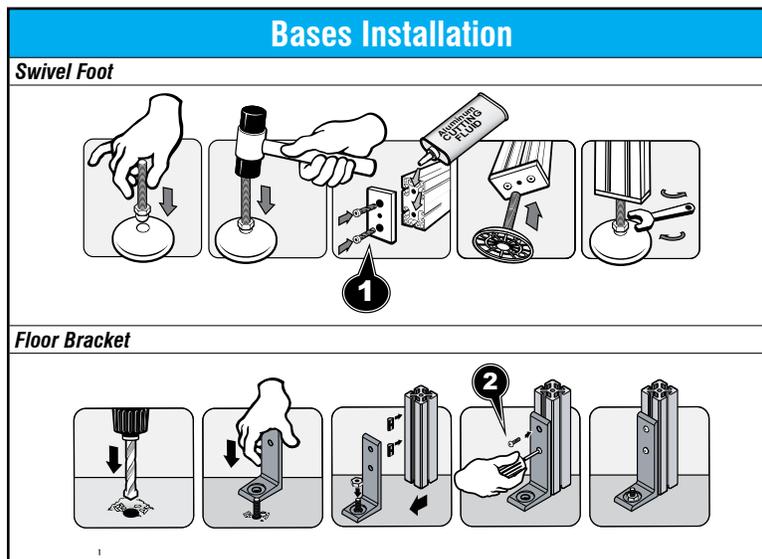

FATH® T-Slotted Rail Accessories


Bases

- Recommended ADC Fastener based on part feature and core hole
- Material: varies by part



30 Series Bases

Fits Slot Size 8



Part Number	Part Image	Price	Description	Fits	Load Rating kg [lb]	Recommended Screw Fastener (ADC Part Number)		Pack Quantity	Material	Drawing Link
						Core Hole Attachment 1	***T-Slot Attachment 2			
162940		\$11.00	M8-1.25 Transport/ Base Plate	30 x 60mm	n/a	161102** (2) included with kit		1	Die-cast zinc	PDF
162941		\$11.00	M10-1.5 Transport/ Base Plate							PDF
162942		\$11.00	M12-1.75 Transport/ Base Plate							PDF
162943		\$17.50	M8-1.25 Transport/ Base Plate	60 x 60mm	n/a	161102** (4) included with kit	n/a	1	Die-cast zinc	PDF
162944		\$17.75	M10-1.5 Transport/ Base Plate							PDF
162945		\$20.00	M12-1.75 Transport/ Base Plate							PDF
162946		\$20.00	M14-2.0 Transport/ Base Plate							PDF
162947		\$20.00	M16-2.0 Transport/ Base Plate							PDF
151201		\$3.75	M8-1.25 x 40mm Swivel Foot Threaded Rod with 15mm ball	Requires Transport / Base Plate 162940 or 162943	350 [772]*	n/a		1	Zinc plated steel	PDF
151202		\$4.00	M10-1.5 x 45mm Swivel Foot Threaded Rod with 15 mm ball	Requires Transport / Base Plate 162941 or 162944	470 [1036]*					PDF
162938		\$6.50	M16-2.0 x 100mm Swivel Foot Threaded Rod with 15mm ball	Requires Transport / Base Plate 162947	1450 [3197]					PDF

*Based on installation with Transport / Base Plate
 Load rating of a swivel foot assembly is based on the part with the lowest load rating, typically the threaded rod.
 Example:
 Threaded rod load rating = 210kg [463lb]
 Swivel base load rating = 3000kg [6614lb]
 Swivel foot assembly load rating = 210kg [463lb]
 **Requires tapping Core Hole (M8-1.25 x 20mm deep)
 ***T-Slot Nut also required.

FATH® T-Slotted Rail Accessories

Bases - Continued

30 Series Bases - continued




Part Number	Part Image	Price	Diameter	Description	Fits	Load Rating kg [lb]	Recommended Screw Fastener (ADC Part Number)		Pack Quantity	Material	Drawing Link
							Core Hole Attachment 1	***T-Slot Attachment 2			
151068		\$4.00	1.57 in [39.0 mm]	Swivel Base With Anti-Slip Plate	Any 15mm ball Threaded Rod	900 [1984]	n/a	n/a	1	Nylon	PDF
151071		\$9.50				PDF					
151072		\$17.00	3.11 in [79.0 mm]			PDF					
151073		\$17.00				PDF					
151069		\$6.00	900 [1984]			Nylon				PDF	
151070		\$6.00	n/a			Nylon				PDF	
162933		\$12.50	see 2D drawing	Extended Swivel Base	1000 [2204]	Nylon	PDF				
162934		\$27.00			3000 [6613]	Die-cast zinc	PDF				
162956		\$11.00	n/a	Floor Bracket	30 x 30mm, 30 x 60mm, 60 x 60mm	n/a	161066	Anodized aluminum	PDF		

*Based on installation with Transport / Base Plate
 Load rating of a swivel foot assembly is based on the part with the lowest load rating, typically the threaded rod.
 Example:
 Threaded rod load rating = 210kg [463lb]
 Swivel base load rating = 3000kg [6614lb]
 Swivel foot assembly load rating = 210kg [463lb]
 **Requires tapping Core Hole (M8-1.25 x 20mm deep)
 ***T-Slot Nut also required.

FATH[®] T-Slotted Rail Accessories


Bases - Continued

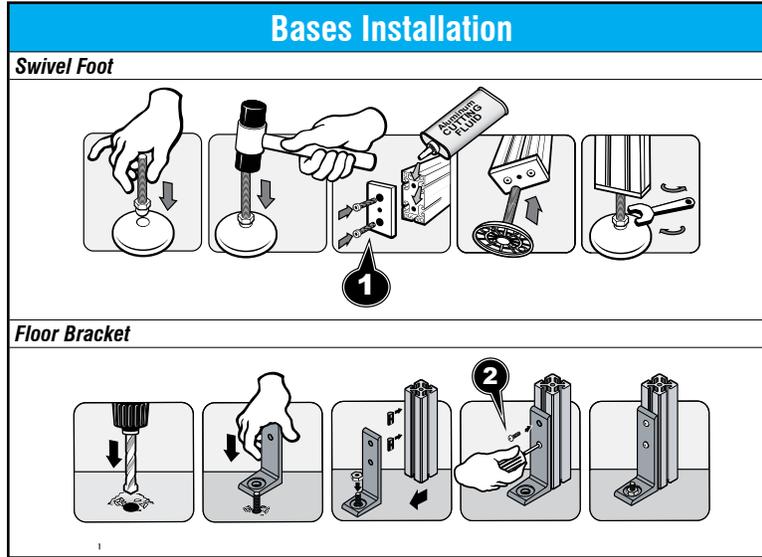

FATH® T-Slotted Rail Accessories

Bases

- Recommended ADC Fastener based on part features and extrusion core hole
- Material: varies by part



40 Series Bases

Fits Slot Size 8

40 Series (mm)

40x40 40x80 80x80


Part Number	Part Image	Price	Diameter	Description	Fits	Load Rating kg [lb]	Recommended Screw Fastener (ADC Part Number)		Pack Quantity	Material	Drawing Link					
							Core Hole Attachment 1	*T-Slot Attachment 2								
151232		\$16.50	n/a	M12-1.75 Transport/Base Plate	40 x 80mm	n/a	n/a	n/a	1	Die-cast zinc	161105 (2) included with kit	PDF				
151233		\$23.00			80 x 80mm						161105 (4) included with kit	PDF				
162948		\$20.00		40 x 80mm	M16-2.0 Transport/Base Plate						80 x 80mm	161105 (2) included with kit	PDF			
162949		\$25.00		80 x 80mm								M20-2.5 Transport/Base Plate	80 x 80mm	161105 (4) included with kit	PDF	
162950		\$25.00													PDF	
151231		\$4.50		M12-1.75 x 66mm Swivel Foot Threaded Rod with 15mm ball	Transport/Base Plate 151232 or 151233						770 [1698]**	n/a	n/a	1	Zinc plated steel	PDF
162938		\$6.50		M16-2.0 x 100mm Swivel Foot Threaded Rod with 15mm ball	Transport/Base Plate 162948 or 162949						1450 [3197]					PDF
162939		\$11.00		M20-2.5 x 150mm Swivel Foot Threaded Rod with 15mm ball	Transport/Base Plate 162950						2430 [5357]					PDF
151068		\$4.00		1.57 in [39.0 mm]	Swivel Base With Anti-Slip Plate						Any 15mm ball Threaded Rod	n/a	n/a	n/a	1	Nylon
151071		\$9.50	3000 [6614]			PDF										

*T-Slot Nut also required.
 **Based on installation with Transport / Base Plate
 Load rating of a swivel foot assembly is based on the part with the lowest load rating, typically the threaded rod.
 Example:
 Threaded rod load rating = 210kg [463lb]
 Swivel base load rating = 3000kg [6614lb]
 Swivel foot assembly load rating = 210kg [463lb]

FATH® T-Slotted Rail Accessories

Bases - Continued

40 Series Bases - Continued



Part Number	Part Image	Price	Diameter	Description	Fits	Load Rating kg [lb]	Recommended Screw Fastener (ADC Part Number)		Pack Quantity	Material	Drawing Link
							Core Hole Attachment 1	*T-Slot Attachment 2			
151069		\$6.00	3.11 in [79.0 mm]	Swivel Base With Anti-Slip Plate	Any 15mm ball Threaded Rod	900 [1984]	n/a	n/a	1	Nylon	PDF
151070		\$6.00									PDF
151255		\$10.00	PDF								
151256		\$10.00	PDF								
151257		\$24.00	Die-cast zinc			PDF					
151258		\$24.00				PDF					
162933		\$12.50	See 2D drawing	Extended Swivel Base	Any 15mm ball Threaded Rod	1000 [2204]	n/a			Nylon	PDF
162934		\$27.00				3000 [6613]				Die-cast zinc	PDF



*T-Slot Nut also required.
 Load rating of a swivel foot assembly is based on the part with the lowest load rating, typically the threaded rod.
 Example:
 Threaded rod load rating = 210kg [463lb]
 Swivel base load rating = 3000kg [6614lb]
 Swivel foot assembly load rating = 210kg [463lb]

FATH® T-Slotted Rail Accessories

Bases - Continued

40 Series Bases - Continued												
Part Number	Part Image	Price	Diameter	Description	Fits	Load Rating kg [lb]	Recommended Screw Fastener (ADC Part Number)		Pack Quantity	Material	Drawing Link	
							Core Hole Attachment 1	*T-Slot Attachment 2				
162889		\$24.50	n/a	Foot Console	40 x 40mm, 40 x 80mm	n/a	n/a	n/a	1	Die-cast aluminum	PDF	
162890		\$25.50									161068	PDF
162960		\$47.00		Support Bracket	40 x 80mm, 80 x 80mm						M8-1.25 x 30mm (not sold by ADC)	PDF
162958		\$11.50		Floor Bracket	All 40 Series						161068	Anodized aluminum

*T-Slot Nut also required.

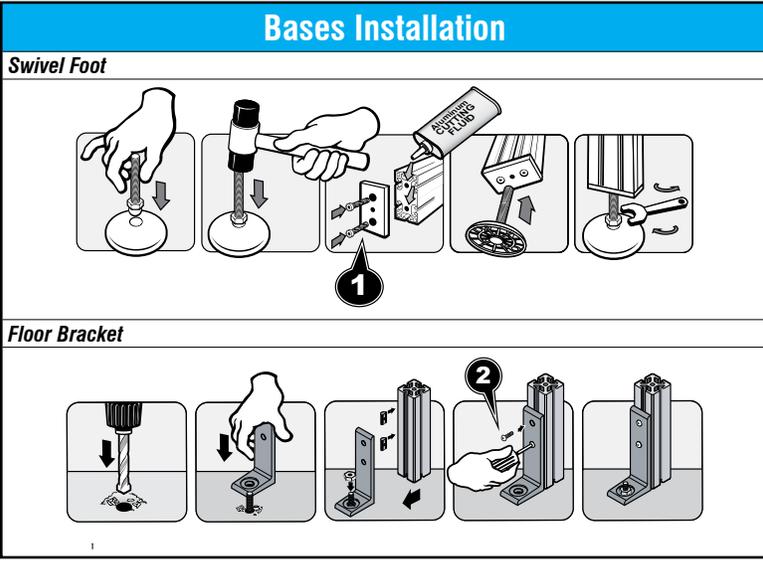

FATH® T-Slotted Rail Accessories

Bases

- Recommended ADC Fastener based on part features and extrusion core hole
- Material: varies by part



45 Series Bases

Fits Slot Size 10

45 Series (mm)

45x45 45x90 90x90


Part Number	Part Image	Price	Diameter	Description	Fits	Load Rating kg [lb]	Recommended Screw Fastener (ADC Part Number)		Pack Quantity	Material	Drawing Link								
							Core Hole Attachment 1	*T-Slot Attachment 2											
151259		\$20.50	n/a	M12-1.75 Transport/ Base Plate	45 x 90mm	n/a	161111 (2) included with kit	n/a	1	Die-cast zinc	PDF								
151260		\$25.00			90 x 90mm		161111 (4) included with kit				PDF								
162951		\$20.00		M16-2.0 Transport/ Base Plate	45 x 90mm		n/a				161111 (2) included with kit	n/a	1	Zinc plated steel	PDF				
162952		\$20.00													M20-2.5 Transport/ Base Plate	PDF			
162953		\$25.00		M16-2.0 Transport/ Base Plate	90 x 90mm										161111 (4) included with kit	PDF			
162954		\$25.00									M20-2.5 Transport/ Base Plate					PDF			
151231		\$4.50		M12-1.75 x 66mm Swivel Foot Threaded Rod with 15mm ball	Transport/Base Plate 151259 or 151260						770 [1698]**					n/a	n/a	1	Nylon
162938		\$6.50		M16-2.0 x 100mm Swivel Foot Threaded Rod with 15mm ball	Transport/Base Plate 162951 or 162953						1450 [3197]**				PDF				
162939		\$11.00		M20-2.5 x 150mm Swivel Foot Threaded Rod with 15mm ball	Transport/Base Plate 162952 or 162954						2430 [5357]**				PDF				
151068		\$4.00	1.57 in [39.0 mm]	Swivel Base With Anti-Slip Plate	Any 15mm ball Threaded Rod	900 [1984]		n/a	1	1	Die-cast zinc				PDF				
151071		\$9.50				3000 [6614]									PDF				

*T-Slot Nut also required.
 **Based on installation with Transport / Base Plate
 Load rating of a swivel foot assembly is based on the part with the lowest load rating, typically the threaded rod.
 Example:
 Threaded rod load rating = 210kg [463lb]
 Swivel base load rating = 3000kg [6614lb]
 Swivel foot assembly load rating = 210kg [463lb]

FATH® T-Slotted Rail Accessories

Bases - Continued

45 Series Bases - continued



Part Number	Part Image	Price	Diameter	Description	Fits	Load Rating kg [lb]	Recommended Screw Fastener (ADC Part Number)		Pack Quantity	Material	Drawing Link
							Core Hole Attachment 1	*T-Slot Attachment 2			
151072		\$17.00	3.11 in [79.0 mm]	Swivel Base With Anti-Slip Plate	Any 15mm ball Threaded Rod	3000 [6614]	n/a	n/a	1	Die-cast zinc	PDF
151073		\$17.00									PDF
151069		\$6.00									PDF
151070		\$6.00									PDF
151255		\$10.00	3.90 in [99.0 mm]			900 [1984]	n/a			Nylon	PDF
151256		\$10.00									PDF
151257		\$24.00	3.90 in [99.0 mm]			3500 [7716]	n/a		1	Die-cast zinc	PDF
151258		\$24.00									PDF
162933		\$12.50	See 2D drawing	Extended Swivel Base	Any 15mm ball Threaded Rod	1000 [2204]				Nylon	PDF
162934		\$27.00									PDF
162959		\$12.50	n/a	Floor Bracket	All 45 Series	n/a		161068		Anodized aluminum	PDF

*T-Slot Nut also required.
 **Based on installation with Transport / Base Plate
 Load rating of a swivel foot assembly is based on the part with the lowest load rating, typically the threaded rod.
 Example:
 Threaded rod load rating = 210kg [463lb]
 Swivel base load rating = 3000kg [6614lb]
 Swivel foot assembly load rating = 210kg [463lb]

FATH[®] T-Slotted Rail Accessories

Bases - Continued

