



Customer information packet

EM2516T-8

25HP, 3515RPM, 3PH, 60HZ, 256T, 3938M, OPSB, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	OPSB
Frame	256T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	25.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	200.0 V @ 60 HZ
Agency Approvals	CSA EEV CURUSEEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	65.000 A @ 200.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.7 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater

Part detail

Revision	Z
Type	AC
Mech. spec.	39K57
Base	
Status	PRD/A
Elec. spec.	39WGX813
Layout	39LYK057
Eff. date	06-11-2024
CD Diagram	CD0695
Poles	02
Leads	6#6
Proprietary	False
Created date	05-14-2012

High Voltage Full Load Amps	65.0 a
Insulation Class	F
Inverter Code	Inverter Ready
IP Rating	NONE
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	6 @ 6 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3938M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	21.69 IN
Power Factor	89
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3515 rpm
Speed Code	Single Speed
Starting Method	Part Winding
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2

None

Nameplate

NP3553L									
CAT.NO.	EM2516T-8								
SPEC	39K057X813								
HP	25								
VOLTS	200								
AMPS	65								
RPM	3515								
FRAME	256T		HZ	60		PH	3		
SF	1.15	CODE	G	DES	A	CLASS	F		
NEMA NOM. EFF	91.7	PF	89						
RATING	40C AMB-CONT								
CC	010A								
ENCL	OPSB	SER							
DE	6309		ODE	6208					
VPWM INVERTER READY									
CT30-60(2:1) VT3-60(20:1)									

Accessories

Part number	Description	Multiplier
39-3400	C FACE KIT	A8

AC Induction Motor Performance Data

Record # 38394

Typical performance - not guaranteed values

Winding: 39WGX813-R001				Type: 3938M		Enclosure: OPSB			
Nameplate Data				200 V, 60 Hz: Single Voltage Motor					
Rated Output (HP)		25		Full Load Torque		37.2 LB-FT			
Volts		200		Start Configuration		direct on line			
Full Load Amps		65		Breakdown Torque		148 LB-FT			
R.P.M.		3515		Pull-up Torque		54.9 LB-FT			
Hz		60 Phase		3		Locked-rotor Torque		77.2 LB-FT	
NEMA Design Code		B		KVA Code		G		Starting Current	453 A
Service Factor (S.F.)		1.15		No-load Current		19.5 A			
NEMA Nom. Eff.		91.7		Power Factor		89		Line-line Res. @ 25°C	0.0681 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		46°C			
S.F. Amps				Temp. Rise @ S.F. Load		57°C			
				Locked-rotor Power Factor		29			
				Rotor inertia		0.971 lb-ft²			

Load Characteristics 200 V, 60 Hz, 25 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	50	79	87	89	90	90	90
Efficiency	87.3	91.7	92.8	91.9	90.9	89.5	91.3
Speed	3578	3559	3539	3515	3490	3461	3500
Line amperes	30.1	36.3	50.1	65.3	81.9	99.4	75.3


ABB Motors and Mechanical Inc.


WINDING # 39WGX813

Typical performance - not guaranteed values.



25 HP 3 PH 60 HZ 3515 RPM 200 V 3938M

TORQUES (LB-FT): PO=148 PU=54.9 LR=77.2 LRA=453

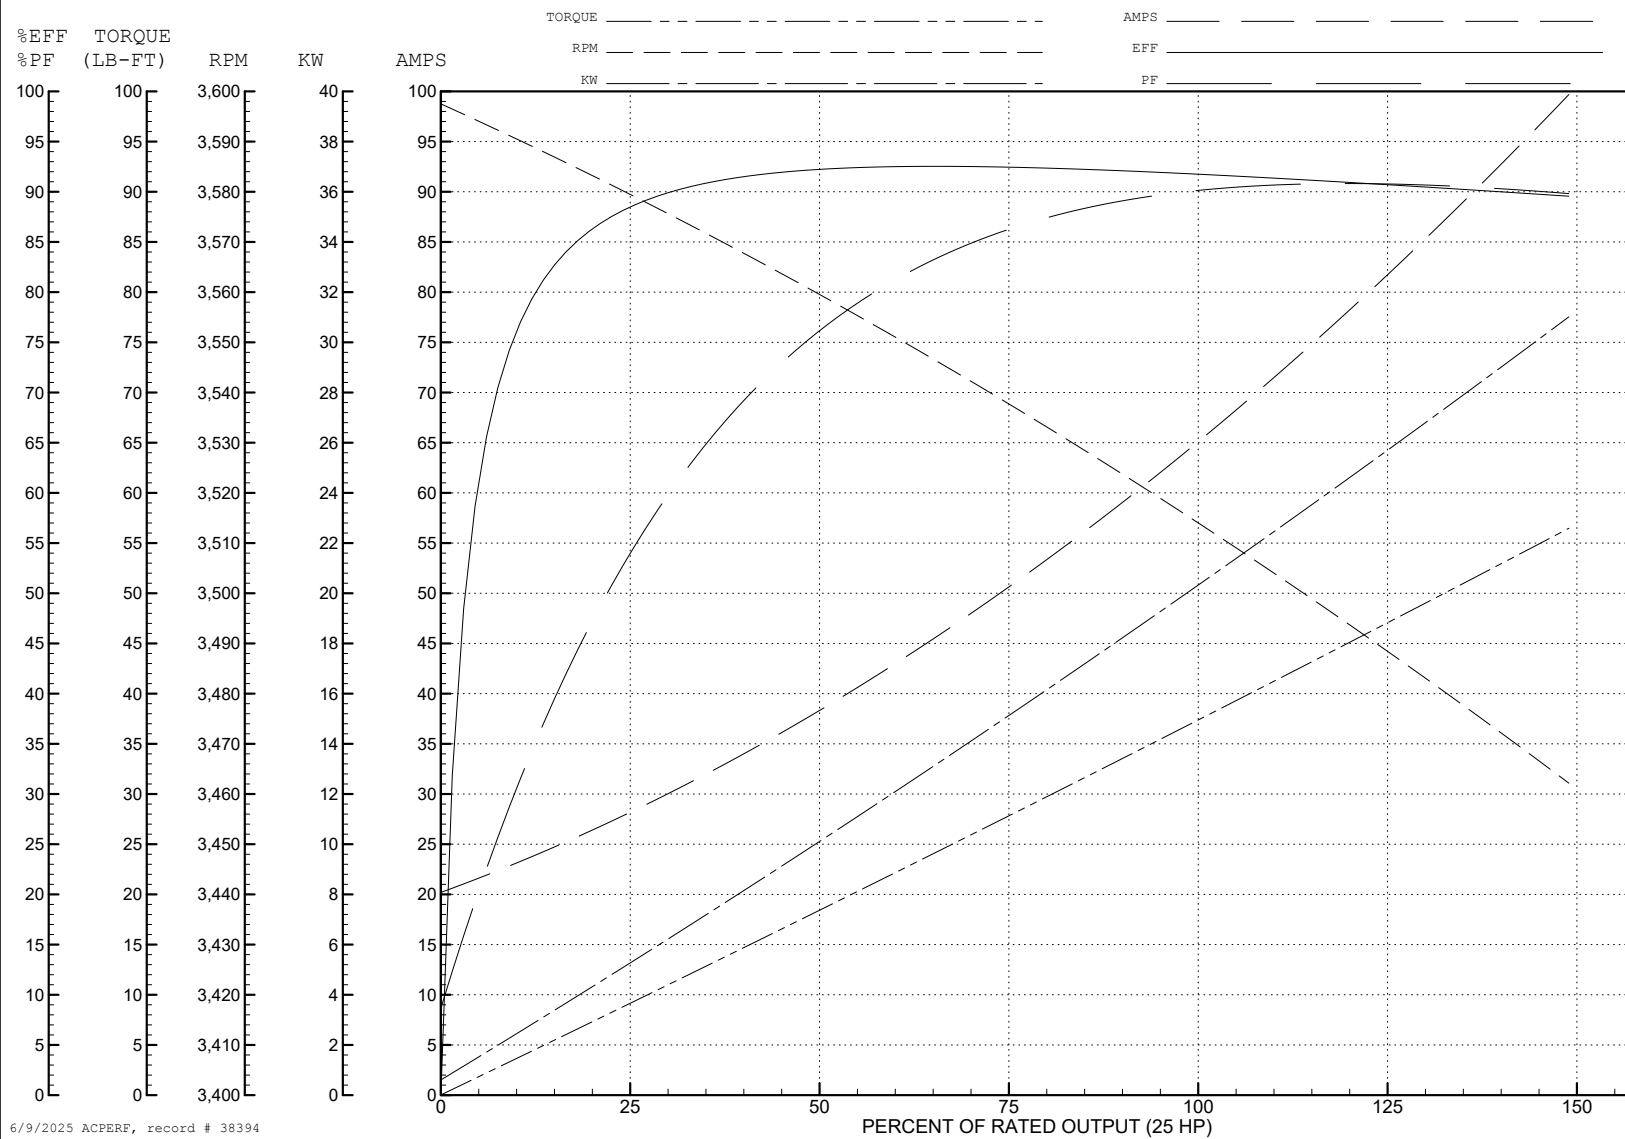


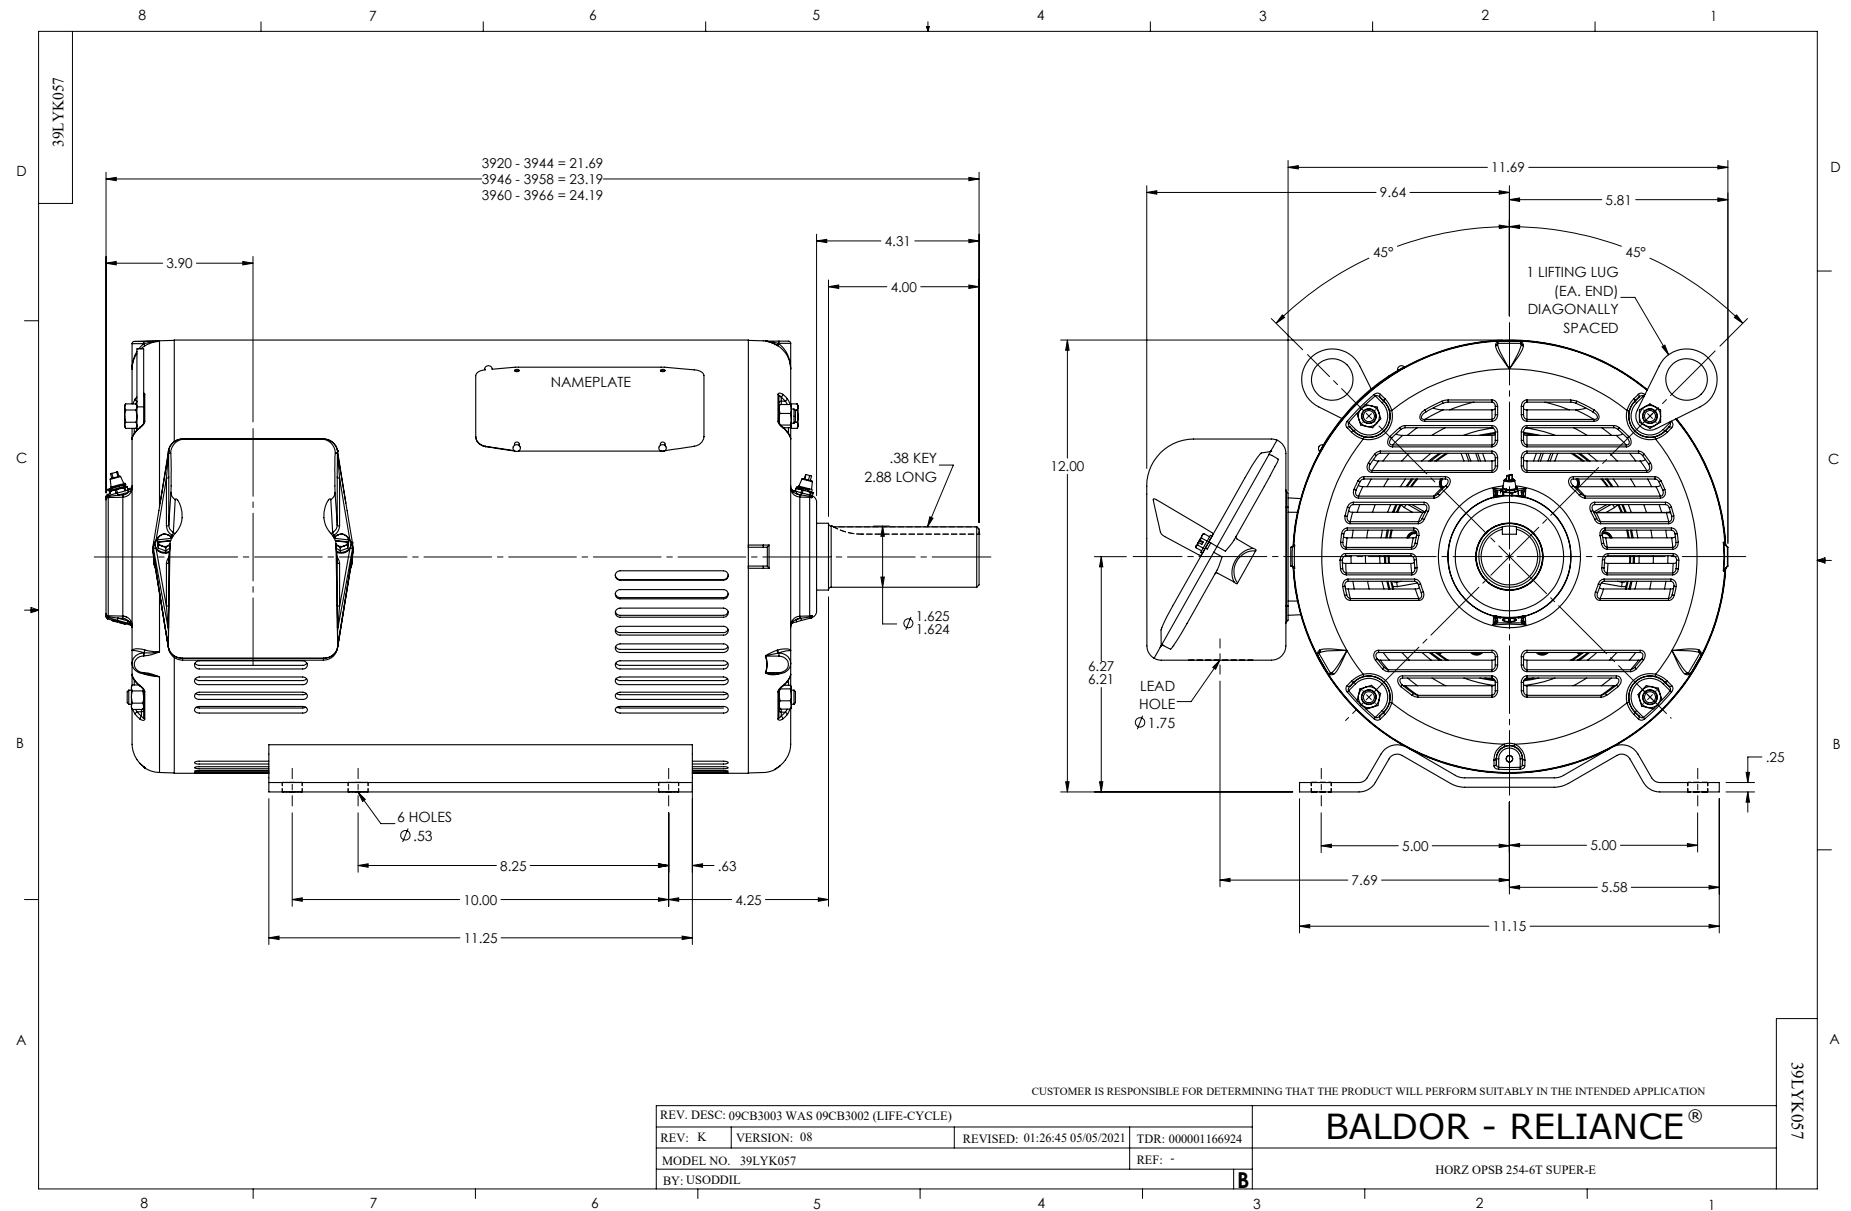


CD0695

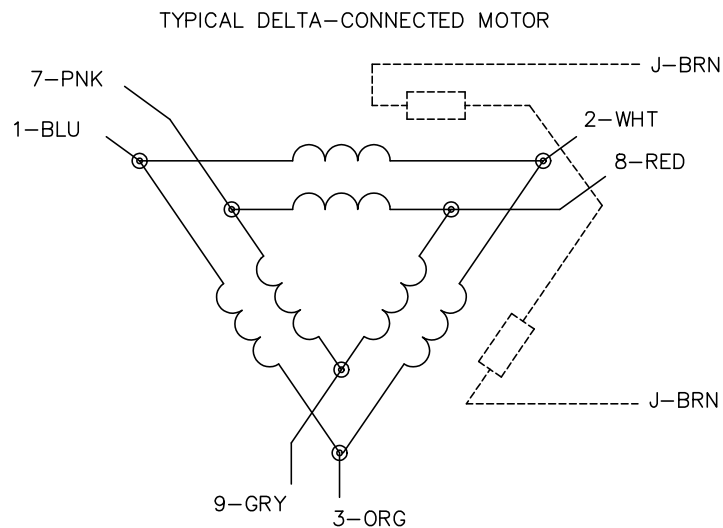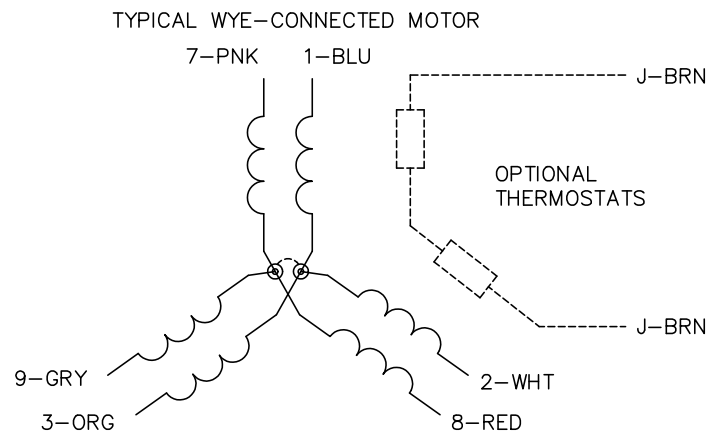

START CONNECTION



RUN CONNECTION



NOTES:

1. MOTOR MAY BE WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0695

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: C

BY: JLP

REVISED: 01/21/99 3:19

TDR: 0171435

S69000

FILE: AAA00005151

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, SV, 6 LEADS, PART WINDING START