

**BALDOR • RELIANCE**

---

# Customer information packet

## EM2542T-CI

50HP, 3540RPM, 3PH, 60HZ, 324TS, 1250M, OPEN, F

Class - None

Division - Not Applicable

## Specifications

Enclosure	OPEN
Frame	324TS
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	50.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA EEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	56.000 A @ 460.0 V 124.000 A @ 208.0 V 112.000 A @ 230.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	93.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard

## Part detail

Revision	U
Type	AC
Mech. spec.	12E01
Base	
Status	PRD/A
Elec. spec.	12WGY256
Layout	12LYE001
Eff. date	06-27-2024
CD Diagram	CD0180
Poles	02
Leads	9#6
Proprietary	False
Created date	03-08-2010

Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	56.0 a
Insulation Class	F
Inverter Code	Inverter Ready
IP Rating	NONE
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 6 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	1250M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	24.63 IN
Power Factor	89
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.875 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3540 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

<b>Vibration Sensor Indicator</b>	<b>No Vibration Sensor</b>
<b>Winding Thermal 1</b>	<b>None</b>
<b>Winding Thermal 2</b>	<b>None</b>

**Nameplate**

**NP3554LUA**

<b>CAT.NO.</b>	EM2542T-CI	<b>P/N</b>		<b>ENCL</b>	OPEN
<b>SPEC.</b>	12E001Y256G1	<b>CC</b>	010A	<b>FRAME</b>	324TS
<b>HP</b>	50	<b>CLASS</b>	F	<b>HZ</b>	60
<b>RPM</b>	3540	<b>PH</b>	3	<b>DES</b>	A
<b>VOLTS</b>	230/460	<b>CODE</b>	G	<b>ODE BRG</b>	6311
<b>AMPS</b>	112/56	<b>DE BRG</b>			6311
<b>RATING</b>	40C AMB-CONT	<b>NEMA-NOM-EFF</b>	93	<b>GREASE</b>	POLYREX EM
<b>PF</b>	89	<b>SER.F.</b>	1.15	<b>CT30-60(2:1) VT3-60(20:1)</b>	
<b>USABLE AT</b>	50HZ 50HP 190/380V 138/69A		SF 1.0		
<b>HTR-VOLTS</b>	<b>HTR-AMPS</b>	<b>MAX. SPACE HEATER TEMP.</b>			

**AC Induction Motor Performance Data**

Record # 53034

Typical performance - not guaranteed values

<b>Winding:</b> 12WGY256-R003		<b>Type:</b> 1250M		<b>Enclosure:</b> OPEN	
<b>Nameplate Data</b>			<b>460 V, 60 Hz: High Voltage Connection</b>		
<b>Rated Output (HP)</b>	50	<b>Full Load Torque</b>	74.1 LB-FT		
<b>Volts</b>	230/460	<b>Start Configuration</b>	direct on line		
<b>Full Load Amps</b>	112/56	<b>Breakdown Torque</b>	276 LB-FT		
<b>R.P.M.</b>	3540	<b>Pull-up Torque</b>	91.7 LB-FT		
<b>Hz</b>	60	<b>Phase</b>	3	<b>Locked-rotor Torque</b>	126 LB-FT
<b>NEMA Design Code</b>	A	<b>KVA Code</b>	G	<b>Starting Current</b>	383 A
<b>Service Factor (S.F.)</b>	1.15	<b>No-load Current</b>	16.6 A		
<b>NEMA Nom. Eff.</b>	93	<b>Power Factor</b>	89	<b>Line-line Res. @ 25°C</b>	0.117 Ω
<b>Rating - Duty</b>	40C AMB-CONT		<b>Temp. Rise @ Rated Load</b>	81°C	
<b>S.F. Amps</b>			<b>Temp. Rise @ S.F. Load</b>	100°C	
			<b>Locked-rotor Power Factor</b>	21	
			<b>Rotor inertia</b>	3.91 LB-FT <sup>2</sup>	

**Load Characteristics 460 V, 60 Hz, 50 HP**

<b>% of Rated Load</b>	<b>25</b>	<b>50</b>	<b>75</b>	<b>100</b>	<b>125</b>	<b>150</b>	<b>S.F.</b>
<b>Power Factor</b>	59	80	86	89	90	90	90
<b>Efficiency</b>	90.6	93.7	94.2	94	93.3	92.4	93.6
<b>Speed</b>	3584	3572	3560	3547	3535	3521	3540
<b>Line amperes</b>	21.6	31.4	43.1	56	69.8	83.7	64.3


ABB Motors and Mechanical Inc.

WINDING # 12WGY256

Typical performance - not guaranteed values.


50 HP 3 PH 60 HZ 3540 RPM 460 V 1250M

TORQUES (LB-FT): PO=276 PU=91.7 LR=126 LRA=383

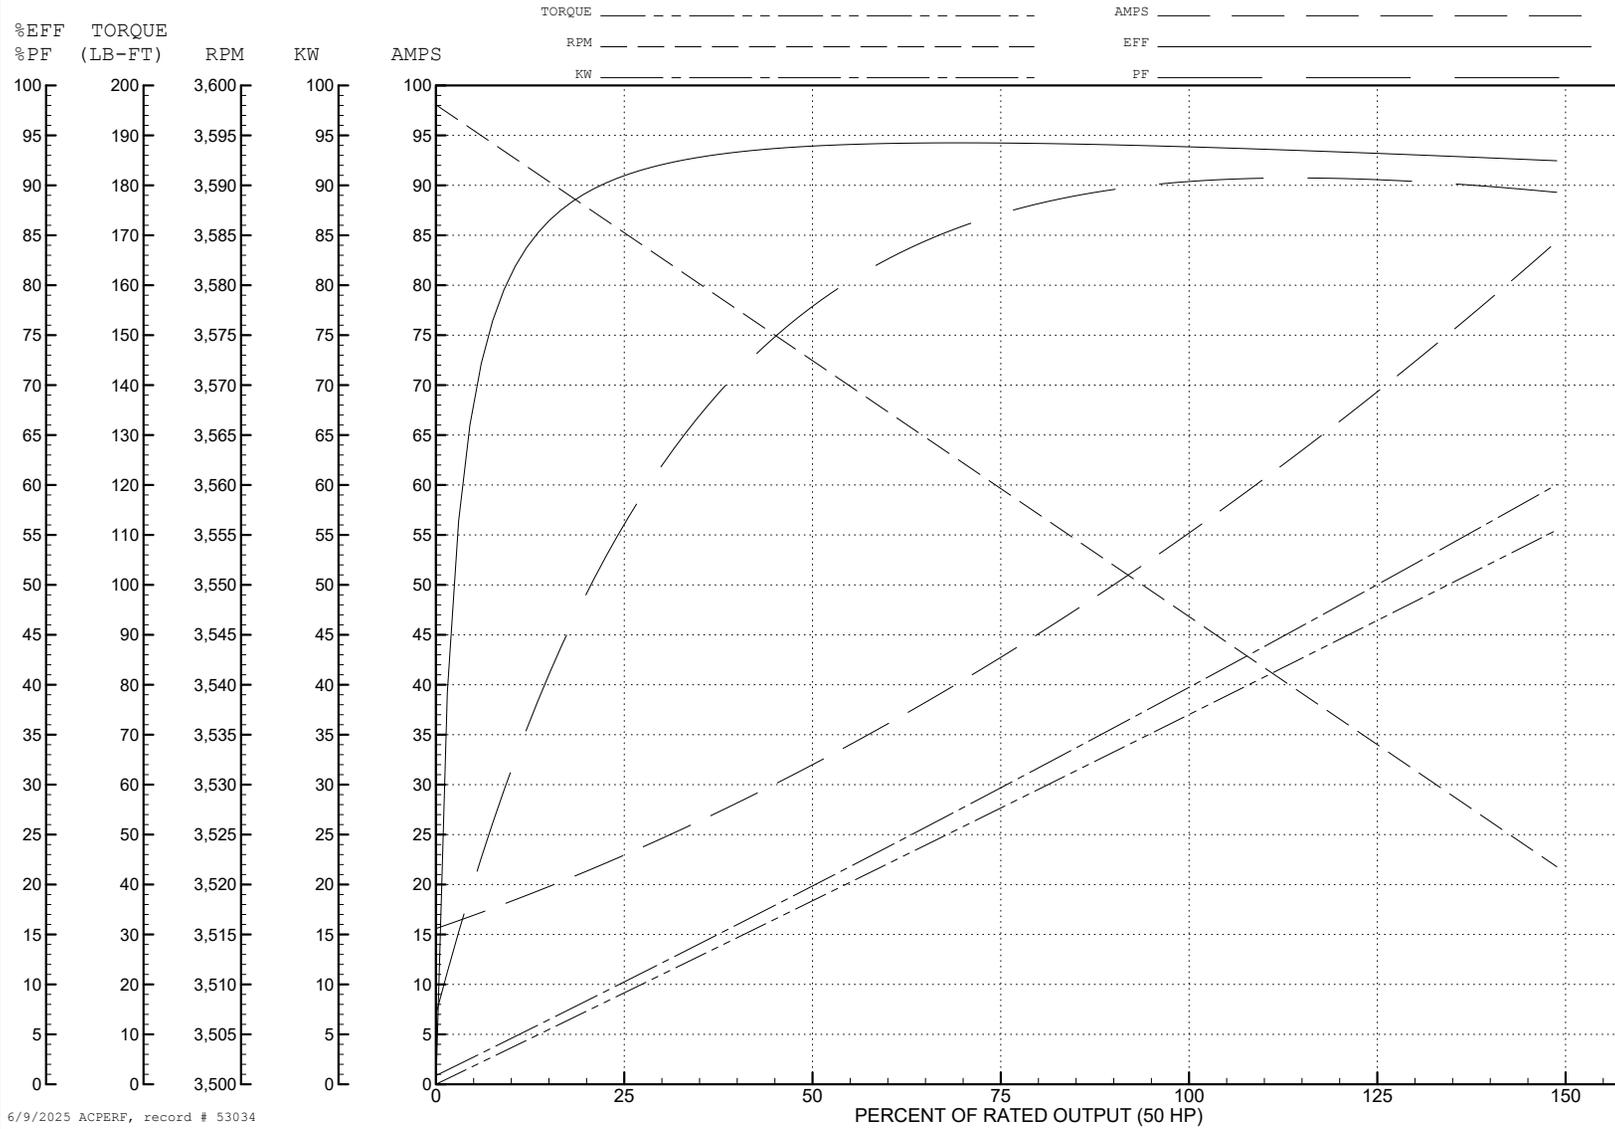





CD0180

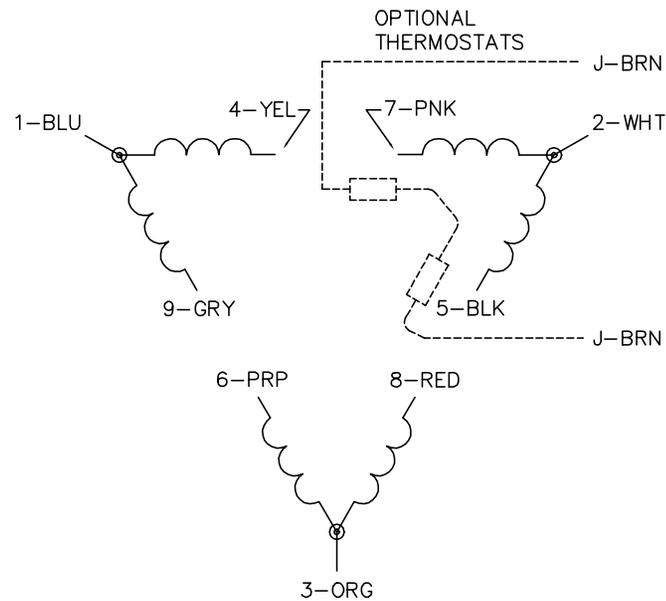

LOW VOLTAGE  
(2D)

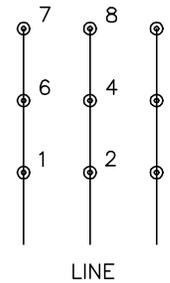

HIGH VOLTAGE  
(1D)

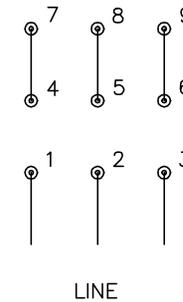

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: D	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\148	REVISED: 10: 25: 29 02/19/2019	BY: ENBRIRO
MTL: -	© □	

**BALDOR - RELIANCE®**

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1