

BALDOR • RELIANCE

Customer information packet

EM2551TS-12

75HP, 1775RPM, 3PH, 60HZ, 365TS, 4462M, OPSB, F

Specifications

Enclosure	OPSB
Frame	365TS
Frame Material	Steel
Frequency	60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	75.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA EEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	174.000 A @ 230.0 V 87.000 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	95.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	87.0 a

Part detail

Revision	U
Type	AC
Mech. spec.	44E018
Base	
Status	PRD/A
Elec. spec.	44WGW162
Layout	44LYE018
Eff. date	11-19-2024
CD Diagram	CD0104
Poles	04
Leads	12#8
Proprietary	False
Created date	08-06-2010

Insulation Class	F
Inverter Code	Inverter Ready
IP Rating	NONE
KVA Code	F
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	12 @ 8 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	4462M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	31.59 IN
Power Factor	87
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.875 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1775 rpm
Speed Code	Single Speed
Starting Method	Wye Start - Delta Run
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP2138LUA

CAT.NO.	EM2551TS-12	P/N		ENCLOSURE	OPSB
SPEC.	44E018W162G1	CC	010A	FRAME	365TS
HP	75	CLASS	F	HZ	60
RPM	1775	PH	3	DES	B
VOLT	230/460	KVA-CODE	F	ODE BRG	6312
AMP	174/87	DE BRG			6313
RATING	40C AMB-CONT	GREASE	POLYREX EM		
NEMA-NOM-EFF	95	PF	87	SER.F.	1.15
HTR-VOLTS	50Hz 75Hp 190/380V 208/104A			SF	1.0
HTR-AMPS					

AC Induction Motor Performance Data

Record # 31071

Typical performance - not guaranteed values

Winding: 44WGW162-R001		Type: 4462M		Enclosure: OPEN	
Nameplate Data			460 V, 60 Hz: High Voltage Connection		
Rated Output (HP)	75	Full Load Torque	222 LB-FT		
Volts	230/460	Start Configuration	direct on line		
Full Load Amps	174/87	Breakdown Torque	617 LB-FT		
R.P.M.	1775	Pull-up Torque	239 LB-FT		
Hz	60	Locked-rotor Torque	332 LB-FT		
NEMA Design Code	B	Starting Current	512 A		
Service Factor (S.F.)	1.15	No-load Current	26.4 A		
NEMA Nom. Eff.	95	Line-line Res. @ 25°C	0.0781 Ω		
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	30°C		
S.F. Amps		Temp. Rise @ S.F. Load	37°C		
		Locked-rotor Power Factor	26.3		
		Rotor inertia	11.7 LB-FT ²		

Load Characteristics 460 V, 60 Hz, 75 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	56	77	83	87	87	87	87
Efficiency	93.6	95.5	96	95.3	94.9	93.9	95.1
Speed	1794	1788	1782	1776	1769	1761	1772
Line amperes	34.1	48.2	66.2	87	106	128	97.8


ABB Motors and Mechanical Inc.

WINDING # 44WGW162

Typical performance - not guaranteed values.

75 HP 3 PH 60 HZ 1775 RPM 460 V 4462M

TORQUES (LB-FT): PO=617 PU=239 LR=332 LRA=512

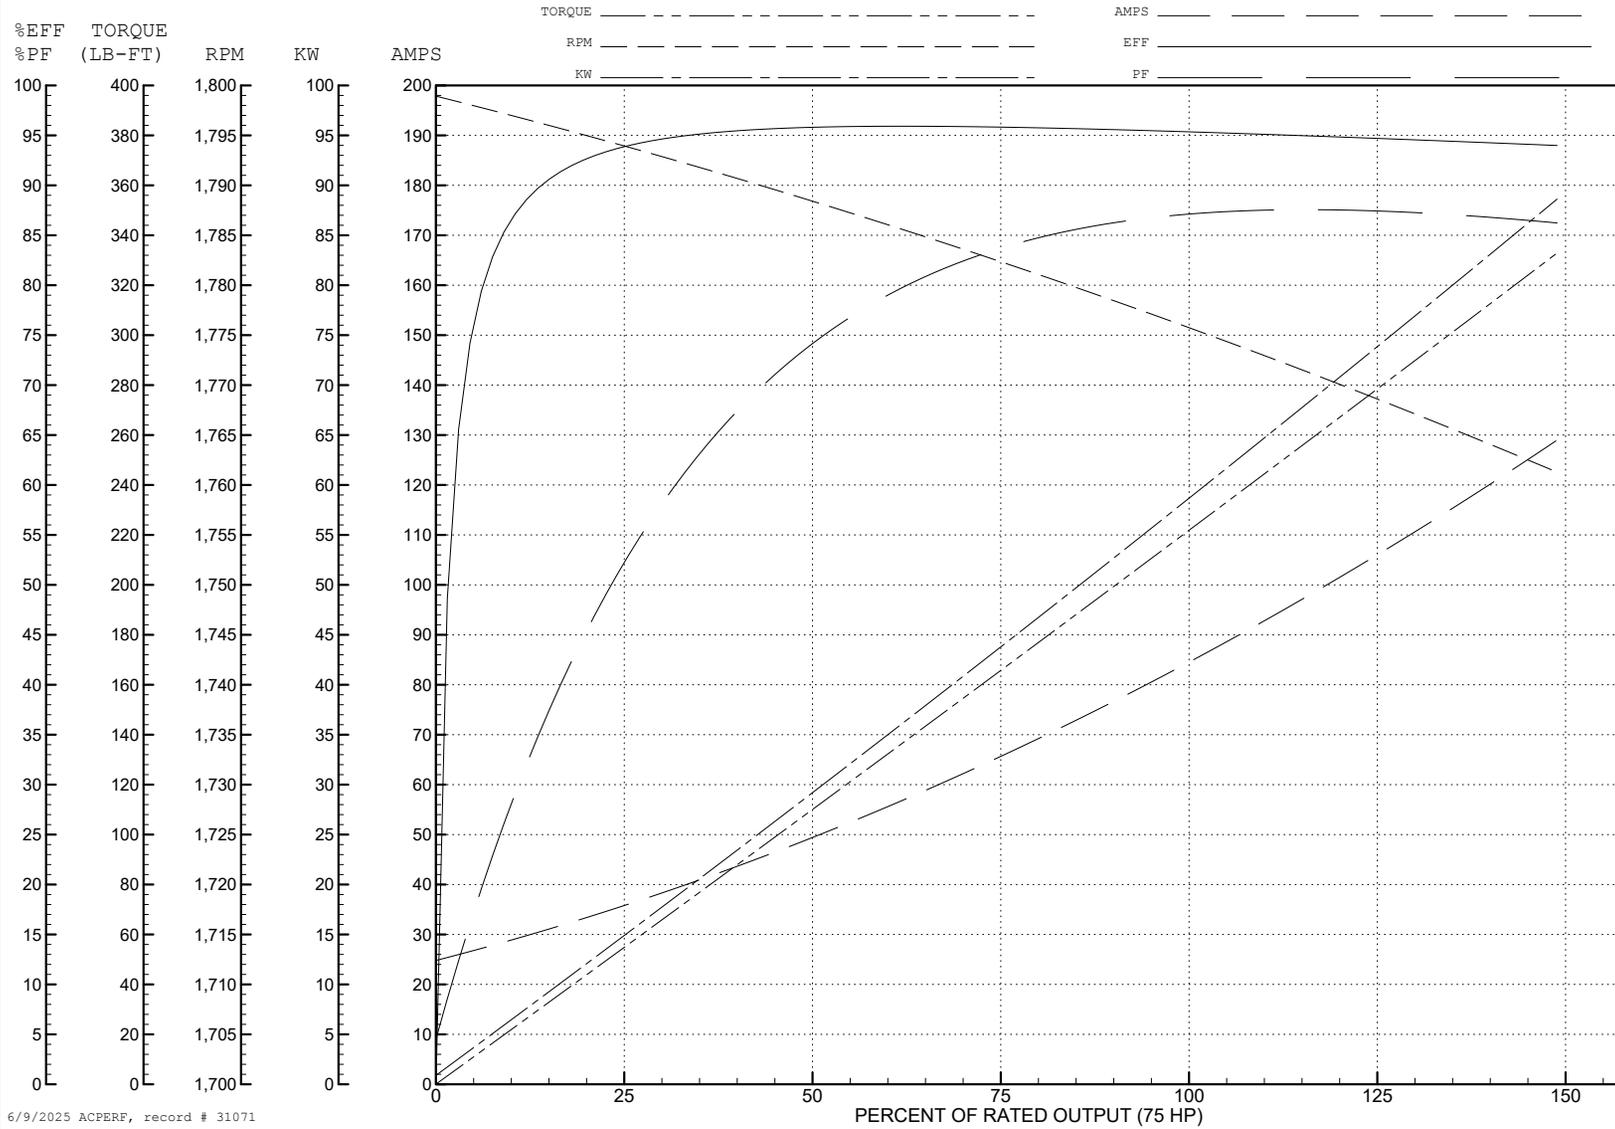

6/9/2025 ACPERF, record # 31071

