

**BALDOR • RELIANCE**

---

# Customer information packet

## EM4106T

20HP, 3520RPM, 3PH, 60HZ, 256T, 0936M, TEFC, F1

Class - None

Division - Not Applicable

## Specifications

Enclosure	TEFC
Frame	256T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	20.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA EEV CURUSEEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	46.000 A @ 230.0 V 50.000 A @ 208.0 V 23.000 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK

## Part detail

Revision	BC
Type	AC
Mech. spec.	09P11
Base	
Status	PRD/A
Elec. spec.	M-09WG-Z601
Layout	09LYP011
Eff. date	12-27-2024
CD Diagram	CD0005
Poles	02
Leads	9#12 NA NA,0# NA NA,0# NA NA,0# NA NA
Proprietary	False
Created date	06-09-2010

Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	23.0 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 12 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0936M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	23.36 IN
Power Factor	89
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	3520 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

<b>Vibration Sensor Indicator</b>	<b>No Vibration Sensor</b>
<b>Winding Thermal 1</b>	<b>None</b>
<b>Winding Thermal 2</b>	<b>None</b>

**Nameplate**

**NP3441LUA**

<b>CAT.NO.</b>	EM4106T						
<b>SPEC</b>	09P011Z601						
<b>HP</b>	20						
<b>VOLTS</b>	230/460						
<b>AMPS</b>	46/23						
<b>RPM</b>	3520						
<b>FRAME</b>	256T		<b>HZ</b>	60		<b>PH</b>	3
<b>SF</b>	1.15	<b>CODE</b>	H	<b>DES</b>	A	<b>CLASS</b>	F
<b>NEMA NOM. EFF</b>	91	<b>PF</b>	89				
<b>RATING</b>	40C AMB-CONT						
<b>CC</b>	010A						
<b>ENCL</b>	TEFC	<b>SER</b>					
<b>DE</b>	6309	<b>ODE</b>	6208				
<b>VPWM INVERTER READY</b>	SFA 52/26						
<b>CT6-60H(10:1)VT3-60H(20:1</b>	50Hz 20HP 190/380V 56/28A						SF1.0

**Accessories**

<b>Part number</b>	<b>Description</b>	<b>Multiplier</b>
09-1309	C FACE KIT	A8

**AC Induction Motor Performance Data**

Record # 31396

Typical performance - not guaranteed values

Winding: 09WGZ601-R001		Type: 0936M		Enclosure: TEFC	
<b>Nameplate Data</b>			<b>460 V, 60 Hz: High Voltage Connection</b>		
Rated Output (HP)	20	Full Load Torque	29.6 LB-FT		
Volts	230/460	Start Configuration	direct on line		
Full Load Amps	46/23	Breakdown Torque	111 LB-FT		
R.P.M.	3520	Pull-up Torque	39.1 LB-FT		
Hz	60	Locked-rotor Torque	49.6 LB-FT		
NEMA Design Code	A	Starting Current	161 A		
Service Factor (S.F.)	1.15	No-load Current	7.17 A		
NEMA Nom. Eff.	91	Line-line Res. @ 25°C	0.47592 Ω		
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	76°C		
S.F. Amps		Temp. Rise @ S.F. Load	95°C		
		Locked-rotor Power Factor	29		
		Rotor inertia	0.92 lb-ft <sup>2</sup>		

**Load Characteristics 460 V, 60 Hz, 20 HP**

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	58	78	86	89	90	90	90
Efficiency	88.9	92.2	92.4	91.7	90.7	89.2	91.1
Speed	3579.6	3561.5	3541.3	3519.5	3495.4	3467.8	3505
Line amperes	9	13	17.7	22.9	28.6	35	26.3


ABB Motors and Mechanical Inc.

WINDING # 09WGZ601


20 HP 3 PH 60 HZ 3520 RPM 460 V 0936M

Typical performance - not guaranteed values.


TORQUES (LB-FT): PO=111 PU=39.1 LR=49.6 LRA=161

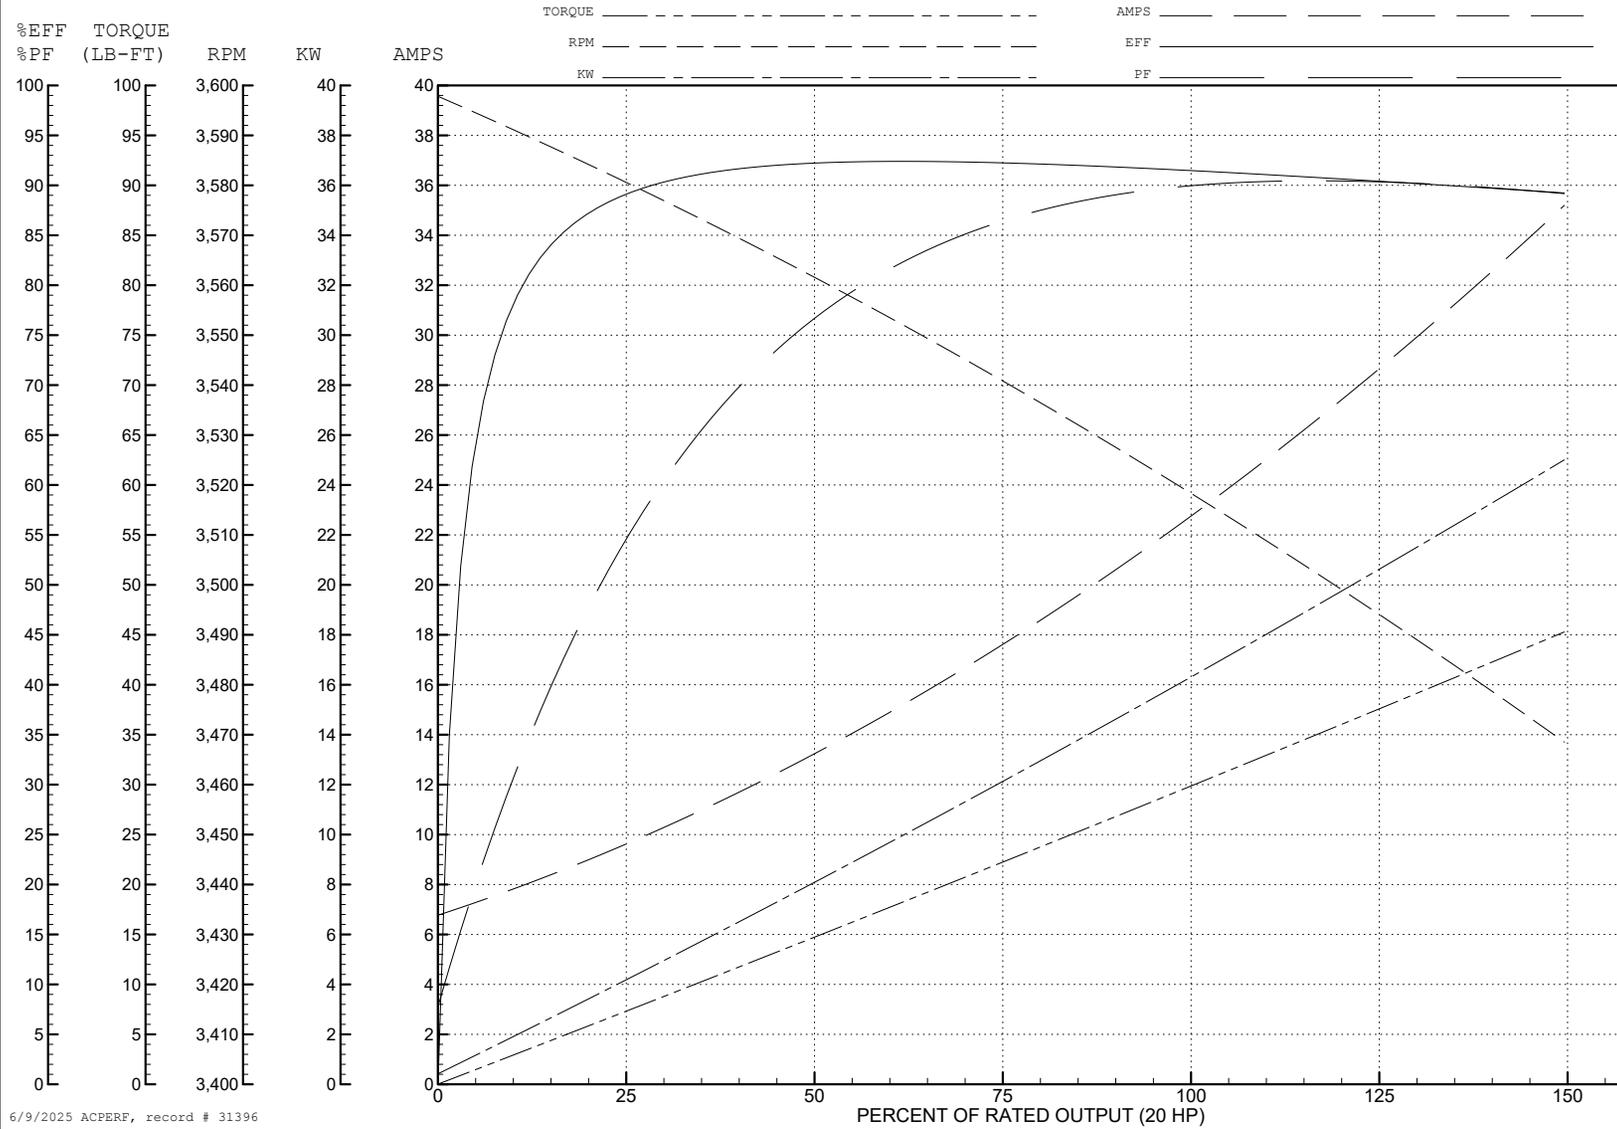


6/9/2025 ACPERF, record # 31396

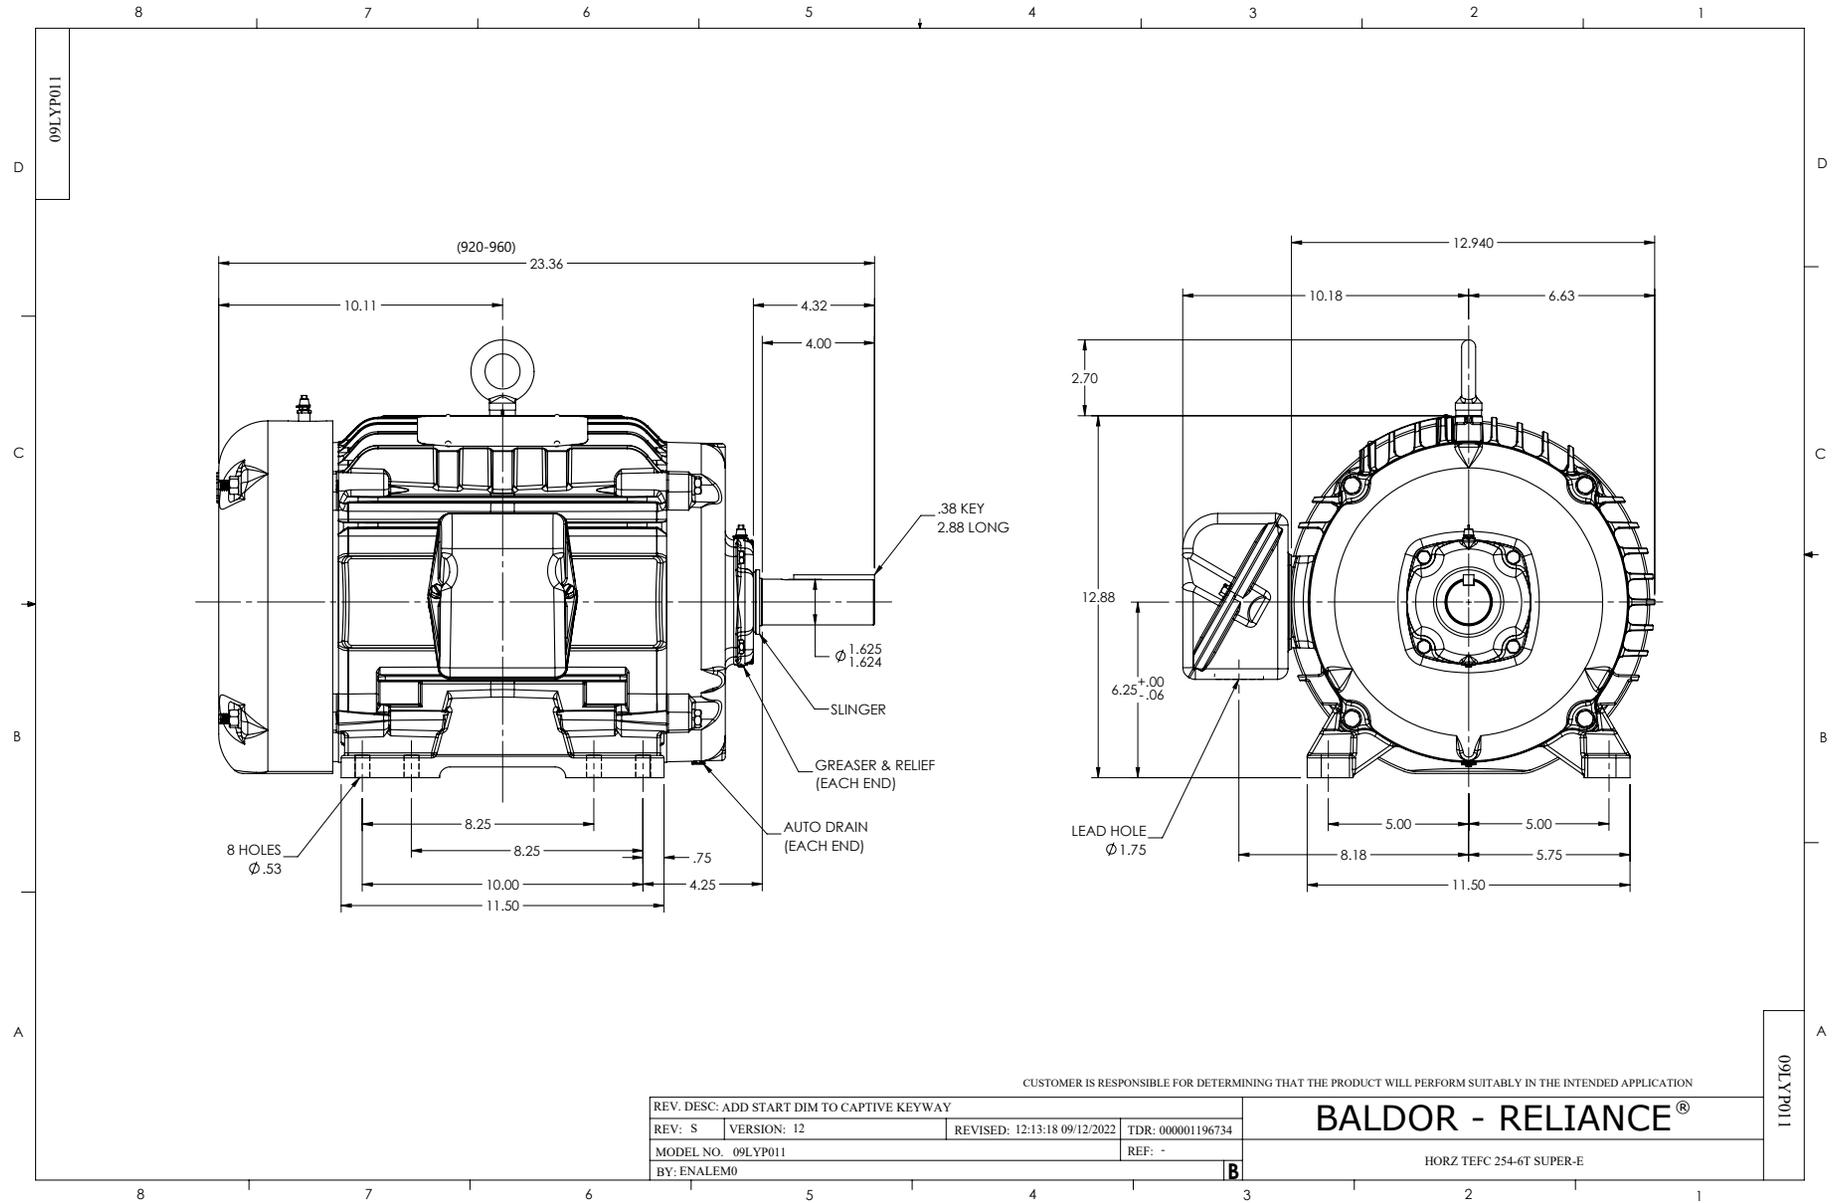

CD0005

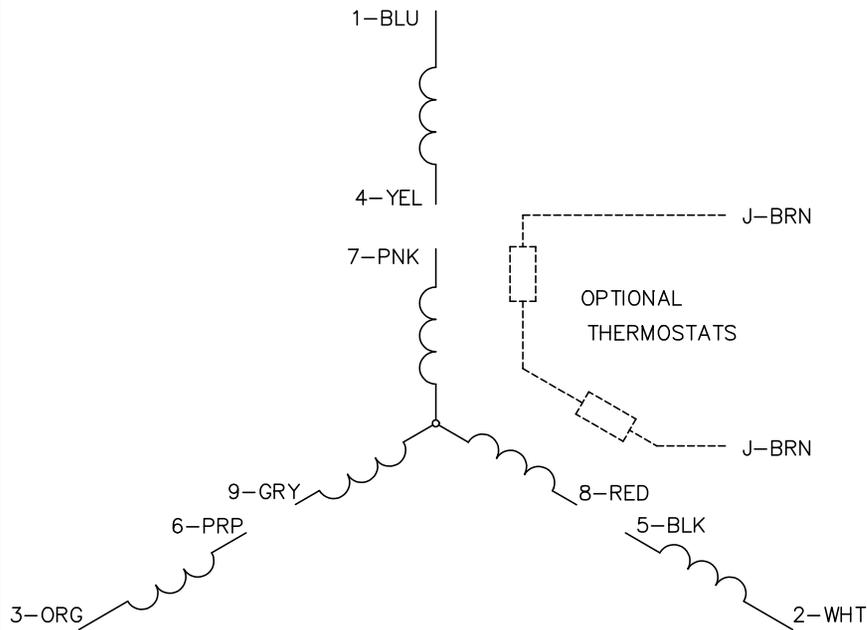


LOW VOLTAGE  
(2Y)

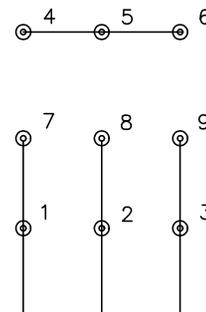

LINE

HIGH VOLTAGE  
(1Y)

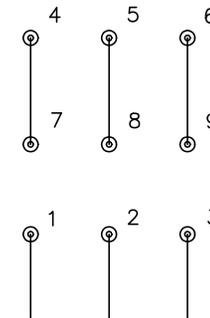

LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
S00000		FILE: AAA00005140	MDL: -
		MTL: -	

**BALDOR ELECTRIC Co.**

3PH, DV, 9 LEADS

CD0005