

**BALDOR • RELIANCE**

---

# Customer information packet

## L3515-50

2/1.5KW, 2900RPM, 1PH, 50HZ, 56, 3536LC, TEFC

Class - None

Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.

6/9/2025 3:57:21 AM

## Specifications

Enclosure	TEFC
Frame	56
Frame Material	Steel
Frequency	50.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	1.500 KW @ 50 HZ
Phase	1
Synchronous Speed @ Frequency	3000 RPM @ 50 HZ
Voltage @ Frequency	220.0 V @ 50 HZ
Agency Approvals	C UR US WEEE UKCA CURUS CE
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	8.300 A @ 220.0 V
Design Code	-
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	81.3 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	8.3 a

## Part detail

Revision	E
Type	AC
Mech. spec.	35E008
Base	
Status	PRD/A
Elec. spec.	35WGG772
Layout	35LYE008
Eff. date	05-07-2024
CD Diagram	CD0017A02
Poles	02
Leads	4#14 A PH
Proprietary	False
Created date	05-25-2023

<b>Insulation Class</b>	F
<b>Inverter Code</b>	Not Inverter
<b>KVA Code</b>	J
<b>Lifting Lugs</b>	No Lifting Lugs
<b>Locked Bearing Indicator</b>	No Locked Bearing
<b>Motor Lead Quantity/Wire Size</b>	4 @ 14 AWG, A PH
<b>Motor Lead Termination</b>	Flying Leads
<b>Motor Standards</b>	NEMA
<b>Motor Type</b>	3536LC
<b>Mounting Arrangement</b>	F1
<b>Number of Poles</b>	2
<b>Overall Length</b>	15.48 IN
<b>Power Factor</b>	98
<b>Product Family</b>	General Purpose
<b>Pulley End Bearing Type</b>	Ball
<b>Pulley Face Code</b>	Standard
<b>Pulley Shaft Indicator</b>	Standard
<b>Rodent Screen</b>	None
<b>RoHS Status</b>	ROHS NON-COMPLIANT
<b>Service Factor</b>	1.15
<b>Shaft Diameter</b>	0.625 IN
<b>Shaft Ground Indicator</b>	No Shaft Grounding
<b>Shaft Rotation</b>	Reversible
<b>Shaft Slinger Indicator</b>	No Slinger
<b>Speed</b>	2900 rpm
<b>Speed Code</b>	Single Speed
<b>Starting Method</b>	Direct on line
<b>Thermal Device - Bearing</b>	None
<b>Thermal Device - Winding</b>	None
<b>Vibration Sensor Indicator</b>	No Vibration Sensor
<b>Winding Thermal 1</b>	None
<b>Winding Thermal 2</b>	None

**Nameplate**

<b>NP1372L</b>										
<b>CAT.NO.</b>	L3515-50									
<b>SPEC.</b>	35E008G772G1									
<b>HP</b>	2/1.5KW									
<b>VOLTS</b>	220									
<b>AMP</b>	8.3									
<b>R.P.M. (1/MIN)</b>	2900									
<b>FRAME</b>	56		<b>HZ</b>	50		<b>PH</b>	1			
<b>SER.F.</b>	1.15	<b>CODE</b>	J	<b>DES</b>	-	<b>CL</b>	F			
<b>NEMA-NOM-EFF</b>	81.3	<b>PF</b>	98							
<b>RATING</b>	40C AMB-S1 CONT									
<b>CC</b>			IP54 KG30 IC411							
<b>DE</b>	6205	<b>ODE</b>	6203							
<b>ENCL</b>	TEFC	<b>SN</b>								

**Accessories**

<b>Part number</b>	<b>Description</b>	<b>Multiplier</b>
35-8762	C FACE KIT	A8
35EP1506A01SP	D-FLANGE KIT	A8

**AC Induction Motor Performance Data**

Record # 101543

Typical performance - not guaranteed values

Winding: 35WGG772-R001		Type: 3536LC	Enclosure: TEFC	
<b>Nameplate Data</b>			<b>220 V, 50 Hz: Single Voltage Motor</b>	
Rated Output (KW)	1.5	Full Load Torque	3.638 LB-FT	
Volts	220	Start Configuration	direct on line	
Full Load Amps	8.3	Breakdown Torque	10.6 LB-FT	
R.P.M.	2900	Pull-up Torque	8.15 LB-FT	
Hz	50 Phase	1	Locked-rotor Torque	9.96 LB-FT
NEMA Design Code	- KVA Code	J	Starting Current	67.6 A
Service Factor (S.F.)	1.15	No-load Current	1.35 A	
NEMA Nom. Eff.	81.3 Power Factor	98	Line-line Res. @ 25°C	0.93974 Ω A Ph 2.4693 Ω B Ph
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	50°C	
S.F. Amps		Temp. Rise @ S.F. Load	61°C	

**Load Characteristics 220 V, 50 Hz, 1.5 KW**

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	94	97	98	98	98	98	98
Efficiency	66.1	80	83.7	84.5	83.2	81	83.7
Speed	2977.1	2957.6	2938.9	2906.2	2878.2	2848	2889
Line amperes	2.78	4.42	6.24	8.26	10.4	12.9	9.54


ABB Motors and Mechanical Inc.

WINDING # 35WGG772


Typical performance - not guaranteed values.

1.5 KW 1 PH 50 HZ 2900 RPM 220 V 3536LC


TORQUES (LB-FT): PO=10.6 PU=8.15 LR=9.96 LRA=67.6

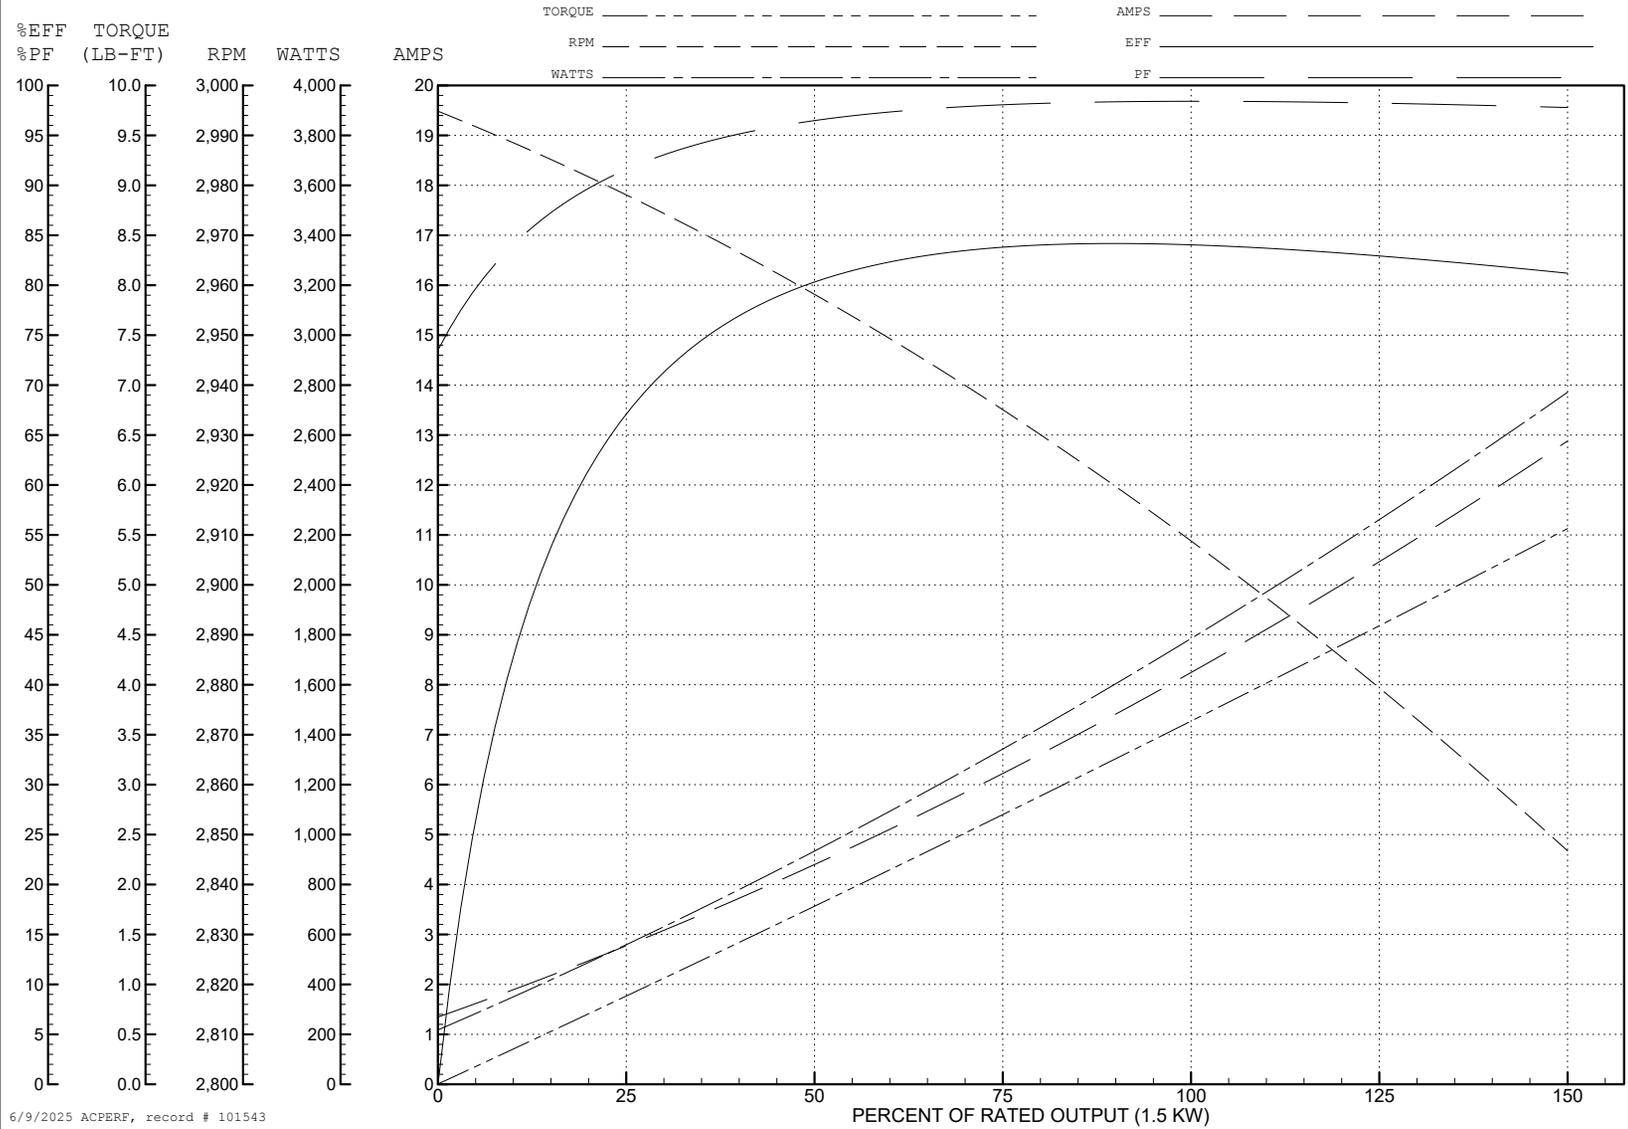

6/9/2025 ACPERF, record # 101543

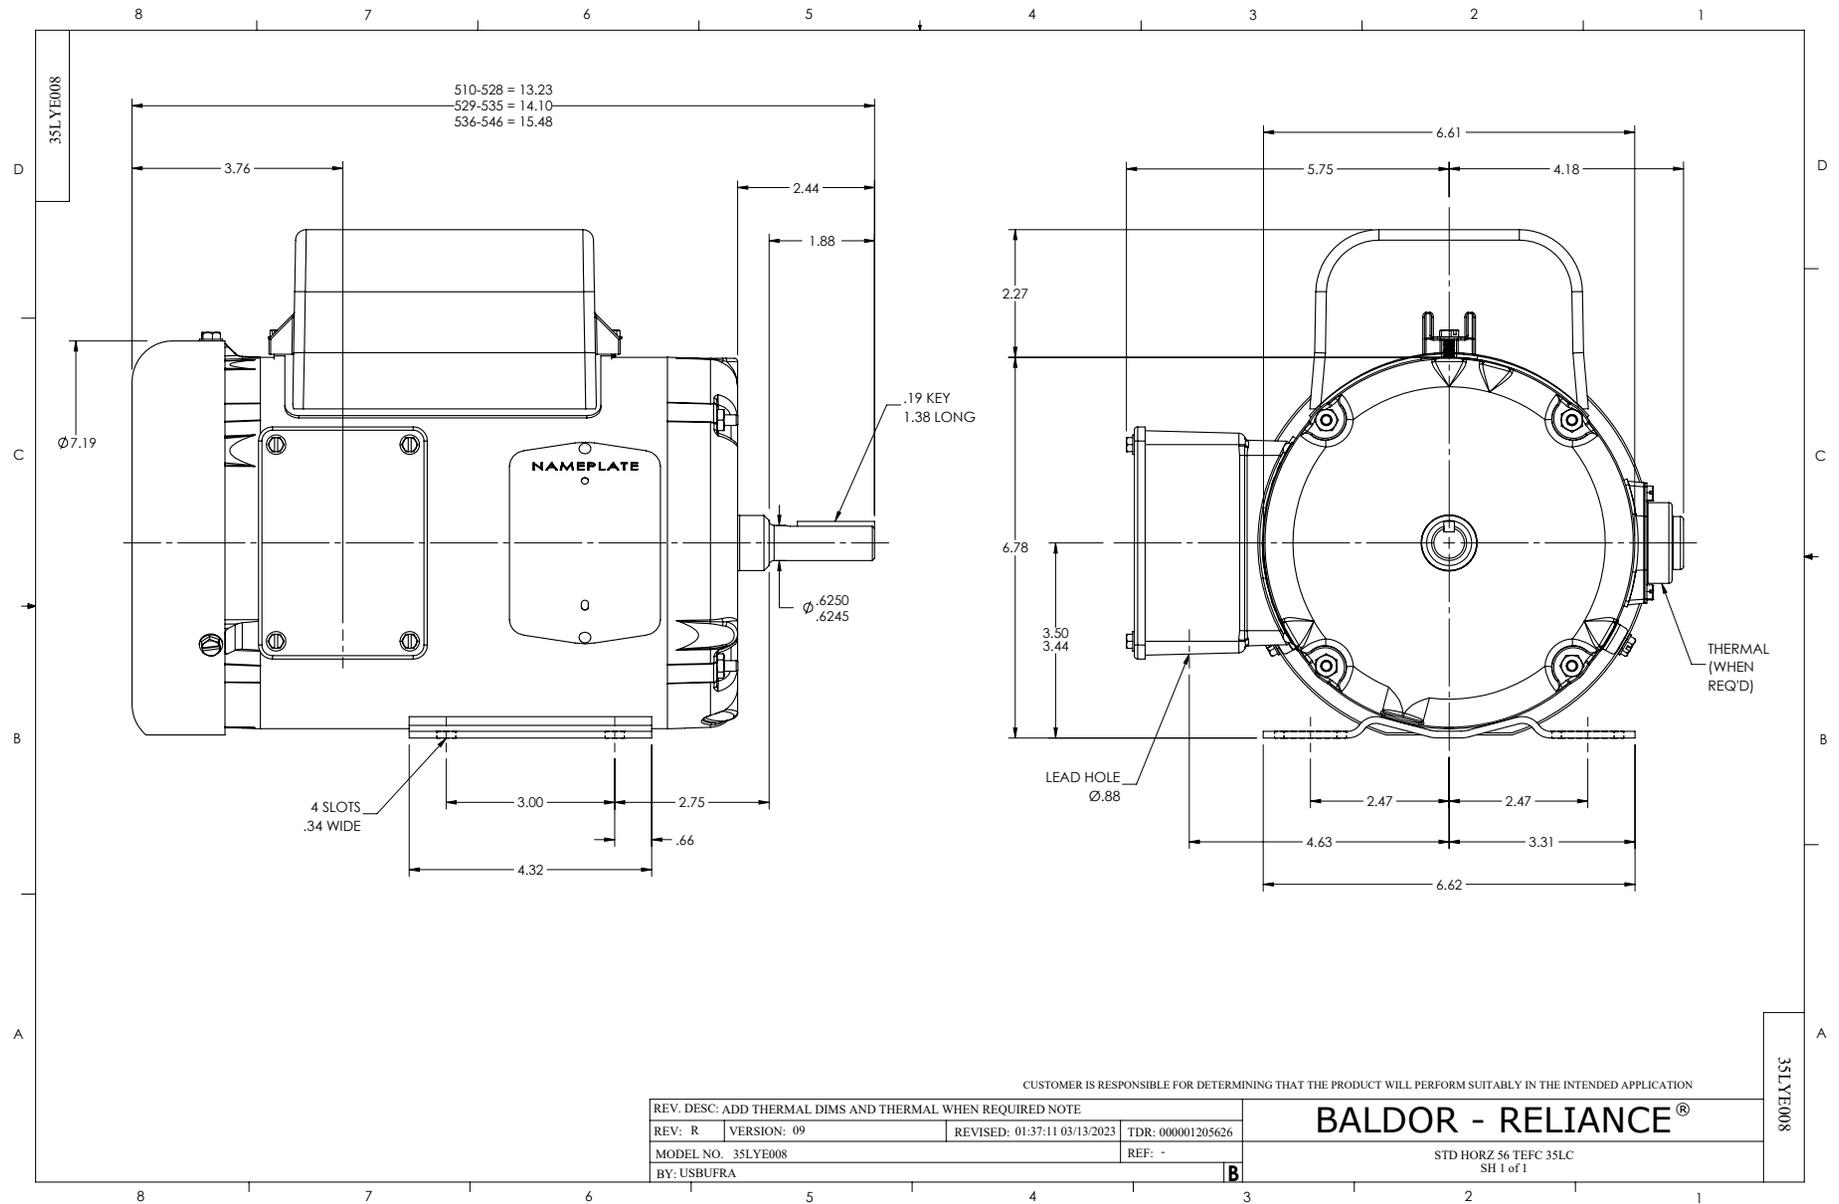

CD0017A02

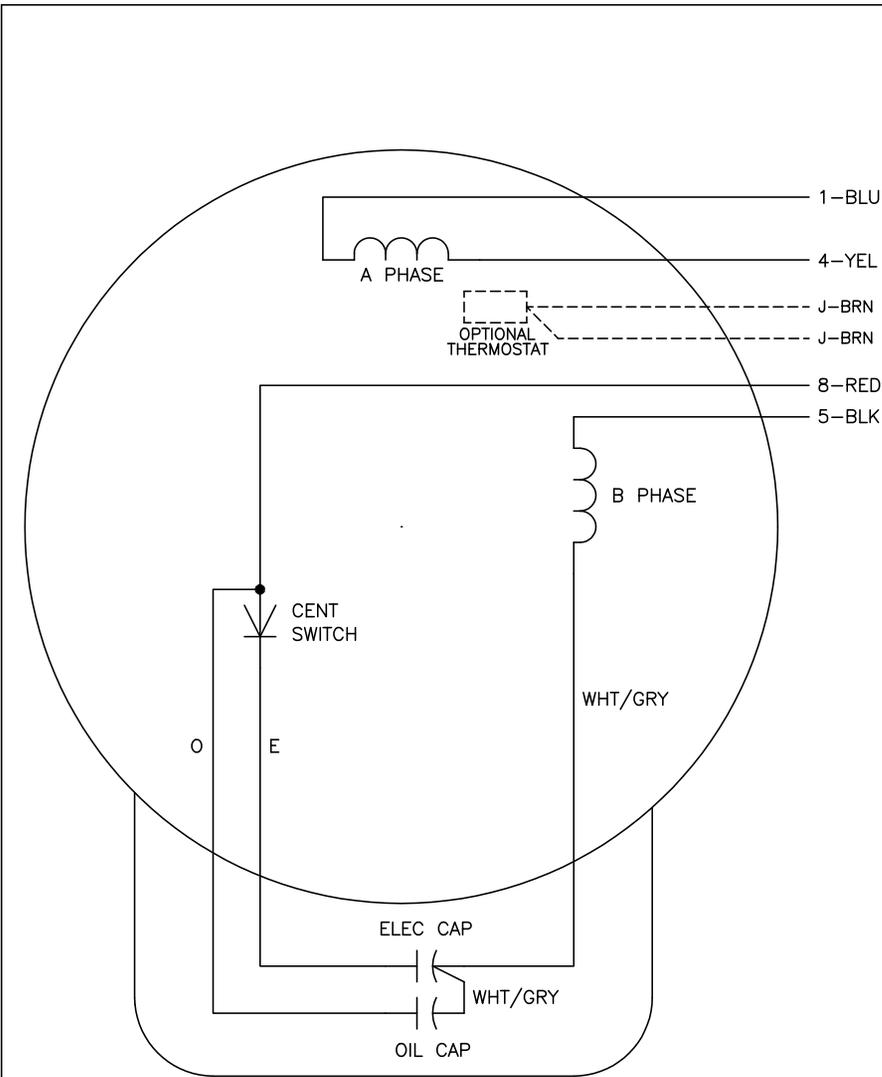

	LINE A	LINE B
STD	1,8	4,5
OPP	1,5	4,8

**NOTES:**

1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
2. OPTIONAL THERMOSTAT IS PROVIDED WHEN SPECIFIED.
3. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0017A02

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: B	BY: JLP	REVISED: 04/09/99 11:30	TDR: 0178636
CD0017A02		FILE: AAA00007514	MDL: -
		MTL: -	

**BALDOR ELECTRIC Co.**

TYPE LC, SV, REV, 4 LEADS