

BALDOR • RELIANCE

Customer information packet

M3532

, RPM, 3PH, HZ, 56, 3516M, TEFC, F1, N

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	56
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Phase	3
Agency Approvals	UR CSA
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
Insulation Class	F
Inverter Code	Inverter Duty
IP Rating	NONE
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3516M
Mounting Arrangement	F1

Part detail

Revision	H
Type	AC
Mech. spec.	35A011
Base	
Status	PRD/A
Elec. spec.	35WGG345
Layout	35LYA011
Eff. date	07-31-2024
CD Diagram	CD0005
Poles	08
Leads	9#18
Proprietary	False
Created date	02-23-2023

Number of Poles	8
Overall Length	12.23 IN
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L									
CAT.NO.	M3532								
SPEC.	35A011G345G1								
HP	.25								
VOLTS	208-230/460								
AMP	2-2.2/1.1								
RPM	870								
FRAME	56		HZ	60		PH	3		
SER.F.	1.35	CODE	R	DES	B	CLASS	F		
NEMA-NOM-EFF	55	PF	39						
RATING	40C AMB-CONT								
CC									
DE	6205	ODE	6203						
ENCL	TEFC	SN							
	SFA 2-2.2/1.1								

Accessories

Part number	Description	Multiplier
35-8762	C FACE KIT	A8
35EP1506A01SP	D-FLANGE KIT	A8

AC Induction Motor Performance Data

Record # 87800

Preliminary Data Sheet

Winding: 35WGG345-R003		Type: 3516M		Enclosure: TEFC	
Nameplate Data			460 V, 60 Hz: High Voltage Connection		
Rated Output (HP)	.25	Full Load Torque	1.5 LB-FT		
Volts	208-230/460	Start Configuration	direct on line		
Full Load Amps	2-2.2/1.1	Breakdown Torque	8.6 LB-FT		
R.P.M.	870	Pull-up Torque	4.9 LB-FT		
Hz	60	Locked-rotor Torque	5.3 LB-FT		
NEMA Design Code	B	Starting Current	4.7 A		
Service Factor (S.F.)	1.35	No-load Current	1.04 A		
NEMA Nom. Eff.	55	Line-line Res. @ 25°C	54 Ω		
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	54°C		
S.F. Amps	2-2.2/1.1	Temp. Rise @ S.F. Load	59°C		
		Locked-rotor Power Factor	69.8		
		Rotor inertia	0.116 lb-ft ²		

Load Characteristics 460 V, 60 Hz, 0.25 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	21	27	33	39	44	50	48
Efficiency	27.7	42.1	50.5	56.6	60.3	62.1	63.6
Speed	895	890	884	878	871	861	863
Line amperes	1.03	1.04	1.04	1.06	1.09	1.13	1.02


ABB Motors and Mechanical Inc.

WINDING # 35WGG345


0.25 HP 3 PH 60 HZ 870 RPM 460 V 3516M

Typical performance - not guaranteed values.

TORQUES (LB-FT): PO=8.6 PU=4.9 LR=5.3 LRA=4.7

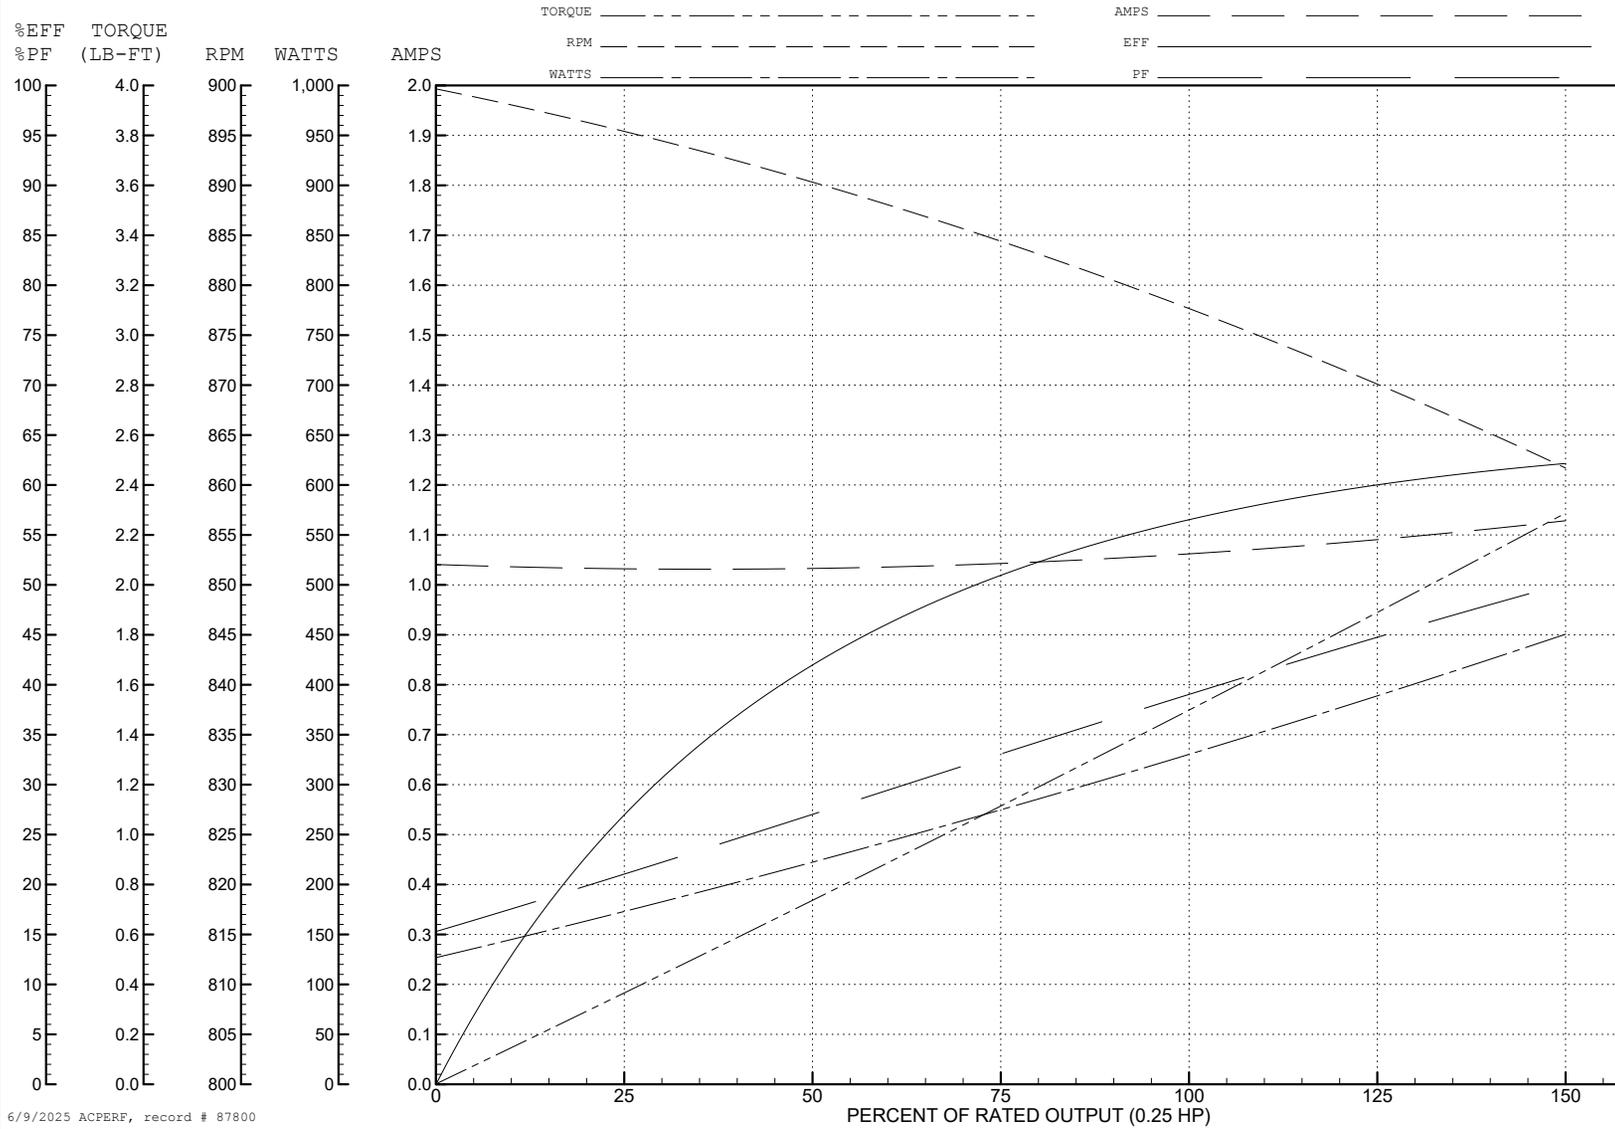


6/9/2025 ACPERF, record # 87800

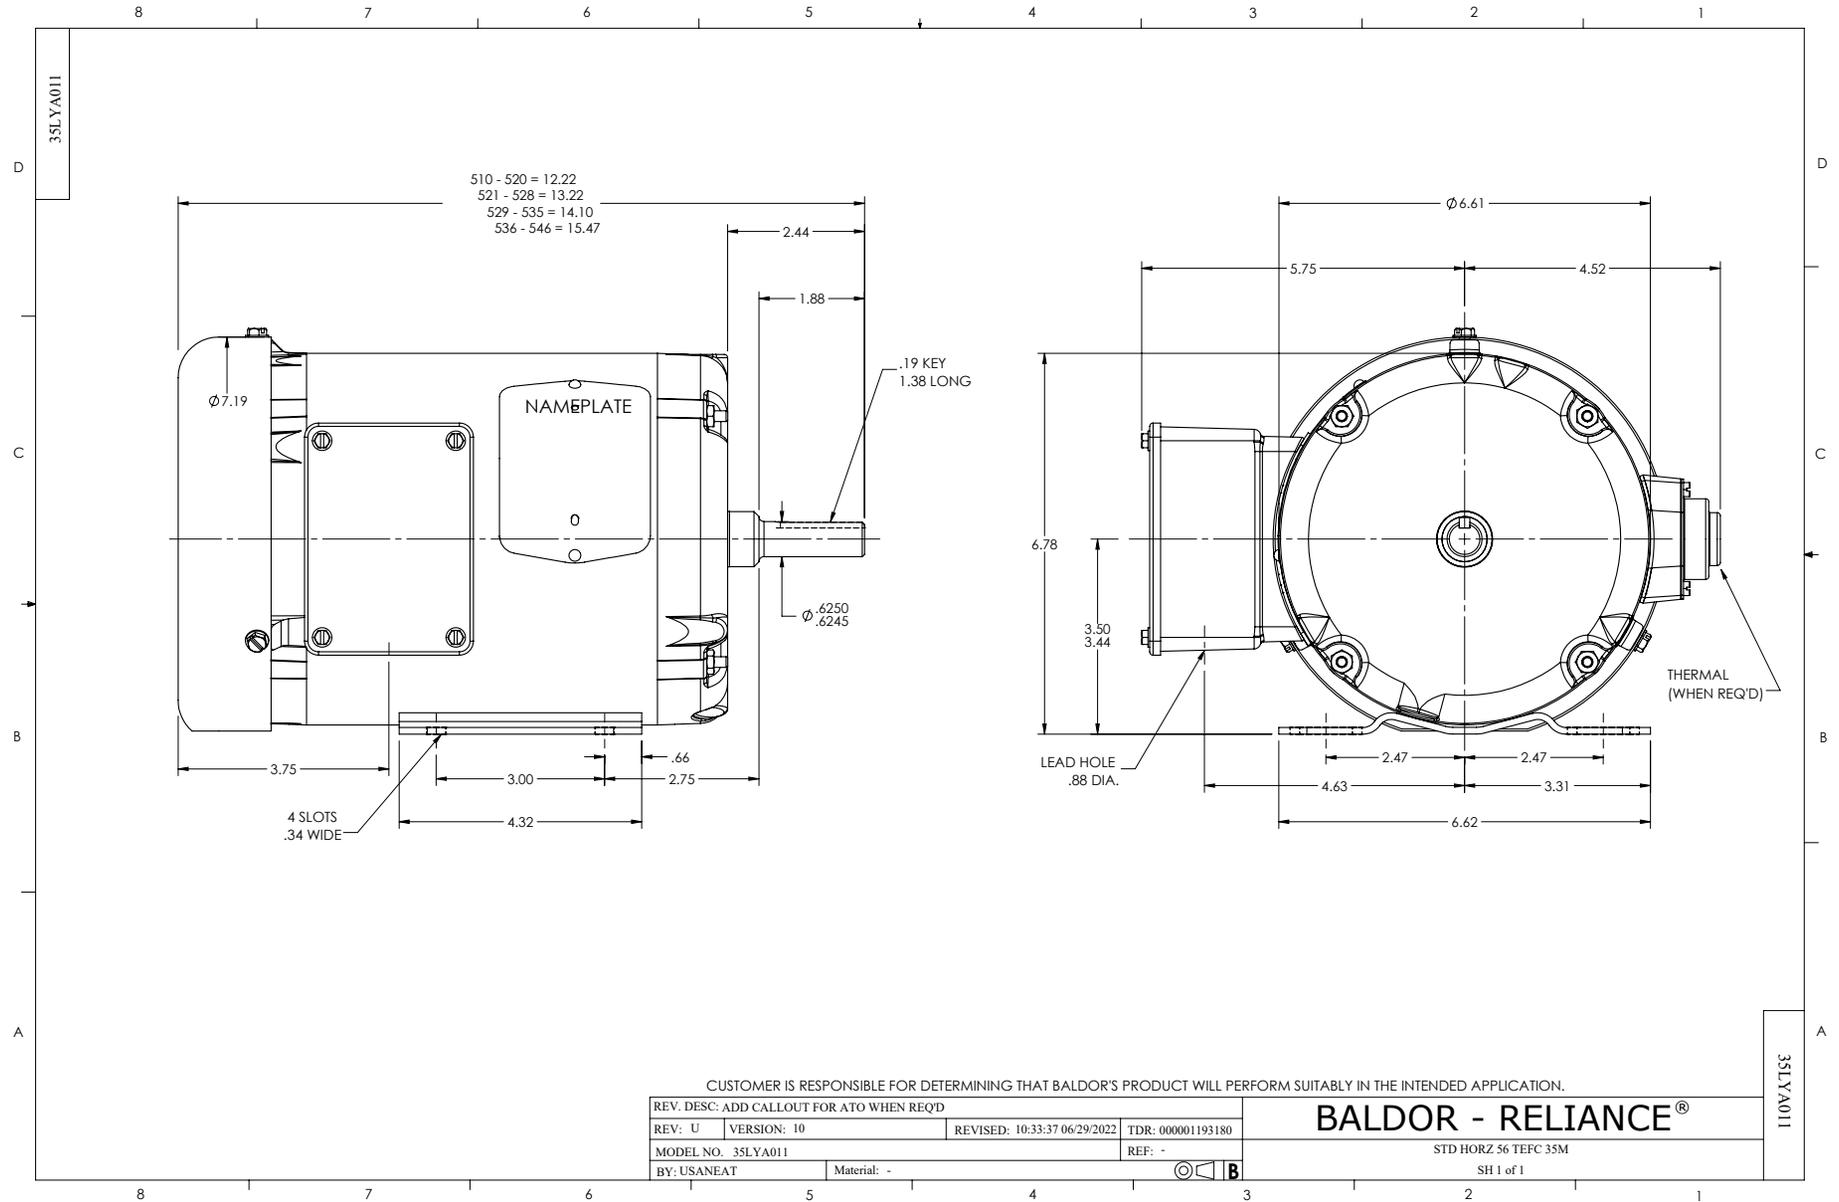

CD0005



LOW VOLTAGE
(2Y)

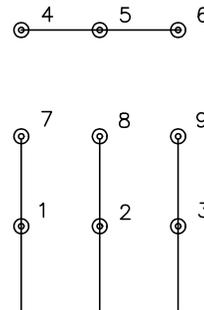

LINE

HIGH VOLTAGE
(1Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
S00000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS