


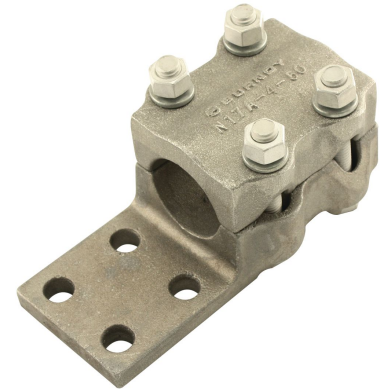

Substation - Aluminum Bolted Terminal

By Burndy
Catalog # [NA46ACG1](#)

Substation Connectors

Application

Substation

Specifications

Certification - ETL	No
Certification - UL Recognized	No
Standards - RoHS Compliance Status	CM
Certification - cULus	No
UL Listed	No
Certification - CSA Approved	No

Conductor

Number Of Conductors	1
Conductor - Connection Combination	Cable to Flat
Conductor Type	• AL Tube Std-Size • CU Tube Std-Size

Configuration

Physical Attribute - Pad Orientation	Straight
Physical Attribute - Pad Configuration	3 x 3 - 4 holes
Physical Attribute - Pad Alignment	Offset
Physical Attribute - Number of Holes	4
Connector Type	Terminal

Dimensions

Dimension - Pad Width inch	3.00 in
Package Height	0.000 in
Dimension - Height mm	85.1 mm
Dimension - Hole Size fraction	9/16
Dimension - Height inch	3.35 in

Package Weight	0.000 lb.
Dimension - Width mm	83 mm
Dimension - Width inch	3.27 in
Package Length	0.000 in
Dimension - F Width Center to Center inch	1.75 in
Package Width	0.000 in
Dimension - L Length Overall mm	179 mm
Dimension - B Length inch	3.74 in
Dimension - D inch	3.00 in
Dimension - N inch	0.62 in
Dimension - Length Overall inch	7.04 in

Force Related

Installation Torque Recommended in-lb	480 LBS/in
---------------------------------------	------------

General

Plated	N
Material - Hardware	Aluminum
One Wrench Installation	Y
Clamping Element Design	Body and Cap
UPC	781810428962
Material	Aluminum Alloy
Plating Type	Unplated
UPC 12 Digit	781810428962
UPC 14 Digit GTIN	00781810428962

Logistics

Pallet Quantity	1
Carton Quantity	1

Product Assets

[Catalog \[English\]](#)