


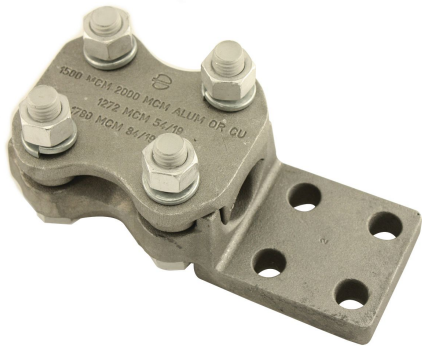

Substation - Aluminum Bolted Terminal

By Burndy
Catalog # [NAR486A44N](#)

Substation Connectors

Application

Substation

Specifications

Certification - ETL	No
Certification - UL Recognized	No
Standards - RoHS Compliance	EX
Status	
Certification - cULus	No
UL Listed	No
Certification - CSA Approved	No

Conductor

Number Of Conductors	1
Conductor - Connection Combination	Cable to Flat
Conductor - AL Str Size	2000 kcmil 2250 kcmil 2300 kcmil 2500 kcmil
Conductor - AL Str Size Range	2000 kcmil-2500 kcmil
Conductor Type	- AL C Str-Size - ACSR C Str-Size

Configuration

Physical Attribute - Pad Orientation	Straight
Physical Attribute - Pad Configuration	4 x 4 - 4 holes
Physical Attribute - Pad Alignment	Offset
Physical Attribute - Number of Holes	4
Connector Type	Terminal

Dimensions

Dimension - Pad Width inch	4.00 in
Package Height	0.000 in

Dimension - Height mm	106.4 mm
Dimension - Hole Size fraction	9/16
Dimension - Height inch	4.19 in
Package Weight	0.000 lb.
Dimension - Width mm	105 mm
Dimension - Width inch	4.12 in
Package Length	0.000 in
Dimension - F Width Center to Center inch	1.75 in
Package Width	0.000 in
Dimension - L Length Overall mm	202 mm
Dimension - B Length inch	4.62 in
Dimension - D inch	4.00 in
Dimension - N inch	1.12 in
Dimension - Length Overall inch	7.94 in

Force Related

Installation Torque	480 LBS/in
Recommended in-lb	

General

Plated	N
Material - Hardware	Aluminum
One Wrench Installation	Y
Clamping Element Design	Body And Cap
UPC	781810196618
Material	Aluminum Alloy
Plating Type	Unplated
UPC 12 Digit	781810196618
UPC 14 Digit GTIN	00781810196618

Logistics

Pallet Quantity	360
Carton Quantity	4

Product Assets

[Catalog \[English\]](#)