




Substation - Aluminum Bolted T Connector

By Burndy
Catalog # [NNTR42A36A](#)

Cast Al Alloy T-Connector, Bolted, Cable to Cable, 600-900 kcmil(Al/Cu), 477-795 kcmil(ACSR)(Run), 350-600 kcmil(Al/Cu), 336.4-477 kcmil(ACSR)(Tap)

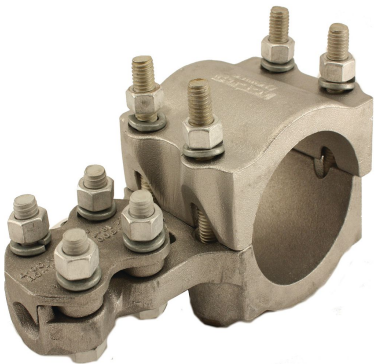

Application

Substation

Specifications

Certification - UL Recognized	No
Certification - cULus	No
Certification - ETL	No
Standards - RoHS Compliance	CM
Status	
UL Listed	No
Certification - CSA Approved	No

Conductor

Conductor - AL Str Run Range	600 kcmil-900 kcmil
Conductor - AL Str Run	600 kcmil 636 kcmil 650 kcmil 700 kcmil 715 kcmil 750 kcmil 795 kcmil 800 kcmil 874 kcmil 900 kcmil
Conductor - AL Str Tap Range	350 kcmil-600 kcmil
Conductor - AL Str Tap	350 kcmil 397 kcmil 400 kcmil 450 kcmil 477 kcmil 500 kcmil 550 kcmil 556 kcmil 600 kcmil
Conductor - ACSR Str Run Range	477.0 (18/1) Pelican kcmil-795 (54/7) Condor kcmil
Conductor - ACSR Str Run	477.0 (18/1) Pelican kcmil 477.0 (24/7) Flicker kcmil 477.0 (26/7) Hawk kcmil 477. (30/7) Hen kcmil 500.0 (30/7) Heron kcmil 556.5 (24/7) Parakeet kcmil 556.5 (26/7) Dove kcmil 556.5 (30/7) Eagle kcmil 605 (24/7) Peacock kcmil

Conductor - ACSR Str Tap Range	605 (26/7) Squab kcmil 605 (30/19) Teal kcmil 636 (24/7) Rook kcmil 636 (26/7) Grosbeak kcmil 636 (30/19) Egret kcmil 666.6 (24/7) Flamingo kcmil 715.5 (54/7) Crow kcmil 715.5 (24/7) Stilt kcmil 715.5 (26/7) Starling kcmil 715.5 (30/19) Redwing kcmil 795 (54/7) Condor kcmil
Conductor - ACSR Str Tap	336.4 (18/1) Merlin kcmil-477.0 (18/1) Pelican kcmil
Conductor - Connection Combination	336.4 (18/1) Merlin kcmil 336.4 (26/7) Linnet kcmil 336.4 (30/7) Oriole kcmil 397.5 (18/1) Chickadee kcmil 397.5 (24/7) Brant kcmil 397.5 (26/7) Ibis kcmil 397.5 (30/7) Larkspur kcmil 477.0 (18/1) Pelican kcmil Cable to Cable

Configuration

Physical Attribute - Number of Tap Conductors	1
Physical Attribute - Number of Run Conductors	1
Connector Type	T-Connector

Dimensions

Package Height	0.000 in
Dimension - Height mm	79.5 mm
Dimension - Height inch	3.13 in
Dimension - Height fraction	3-1/8 in
Package Weight	0.000 lb.
Package Length	0.000 in
Package Width	0.000 in
Dimension - L Length Overall mm	168 mm
Dimension - B Length fraction	3-1/2 in
Dimension - Width mm	70 mm
Dimension - Width inch	2.75 in
Dimension - B Length inch	3.50 in
Dimension - Length BB inch	3.25 in

Dimension - Length Overall inch	6.63 in	Plated UPC Type Material Plating Type UPC 12 Digit UPC 14 Digit GTIN	N 781810004005 Bolted Tees Aluminum Alloy Unplated 781810004005 00781810004005
Force Related			
Installation Torque Recommended in-lb	300 LBS/in		
General		Product Assets	
Material - Hardware	Aluminum	Catalog [English]	
One Wrench Installation	Y		



A Hubbell brand