


Aluminum

SH Type Channel


- Material: Aluminum

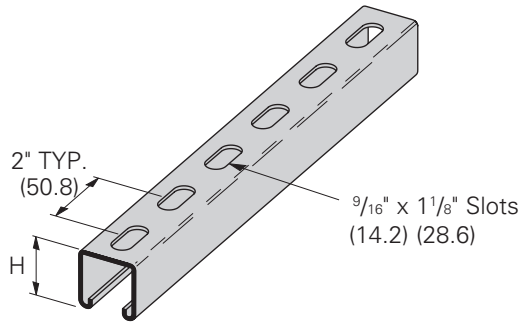

Part No.	Thickness in. mm	H in. mm	Wt./C Lbs./Ft.kg/m
B12SH AL	.105 (2.6)	2 ⁷ / ₁₆ " (61.9)	.83 (1.23)
B22SH AL	.105 (2.6)	1 ⁵ / ₈ " (41.3)	.63 (.93)
B54SH AL	.080 (2.0)	1 ³ / ₁₆ " (20.6)	.34 (.50)

H-17/8 Type Channel


- Material: Aluminum

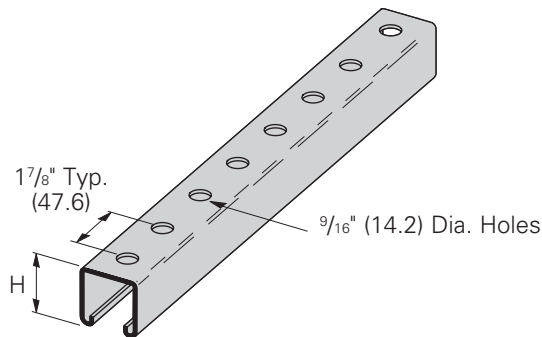

Part No.	Thickness in. mm	H in. mm	Wt./C Lbs./Ft.kg/m
B12H17/8 AL	.105 (2.6)	2 ⁷ / ₁₆ " (61.9)	.86 (1.28)
B22H17/8 AL	.105 (2.6)	1 ⁵ / ₈ " (41.3)	.66 (.98)
B54H17/8 AL	.080 (2.0)	1 ³ / ₁₆ " (20.6)	.37 (.55)

KO6 Type Knockout Channel


- Material: Aluminum

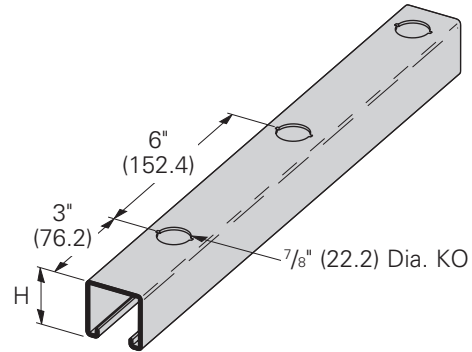

Part No.	Thickness in. mm	H in. mm	Wt./C Lbs./Ft.kg/m
B12KO6 AL	.105 (2.6)	2 ⁷ / ₁₆ " (61.9)	.86 (1.28)
B22KO6 AL	.105 (2.6)	1 ⁵ / ₈ " (41.3)	.66 (.98)
B54KO6 AL	.080 (2.0)	1 ³ / ₁₆ " (20.6)	.37 (.56)

B2000 Series Rigid Conduit Clamps

- Safety Factor of 5
- Machine Screw and Square Nut included
- Pipe clamp material 5052-H32

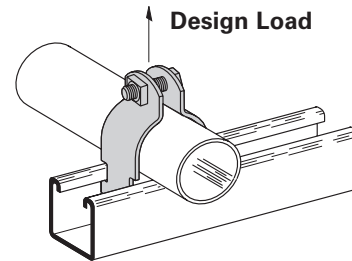

Part No.	Conduit or Pipe Size in. mm	Material Thickness in. mm	Design Load Lbs. kN	Wt./C Lbs. kg
B2001 AL	³ / ₈ " (10)	.063 (1.6)	180 (.80)	4 (1.8)
B2008 AL	¹ / ₂ " (15)	.063 (1.6)	180 (.80)	4 (1.8)
B2009 AL	³ / ₄ " (20)	.080 (2.0)	270 (1.20)	6 (2.7)
B2010 AL	1" (25)	.080 (2.0)	270 (1.20)	7 (3.2)
B2011 AL	1 ¹ / ₄ " (32)	.080 (2.0)	270 (1.20)	8 (3.6)
B2012 AL	1 ¹ / ₂ " (40)	.100 (2.5)	360 (1.60)	11 (5.0)
B2013 AL	2" (50)	.100 (2.5)	360 (1.60)	12 (5.4)
B2014 AL	2 ¹ / ₂ " (65)	.100 (2.5)	360 (1.60)	13 (5.9)
B2015 AL	3" (80)	.100 (2.5)	360 (1.60)	16 (7.2)
B2016 AL	3 ¹ / ₂ " (90)	.125 (3.2)	450 (2.00)	22 (10.0)
B2017 AL	4" (100)	.125 (3.2)	450 (2.00)	24 (10.9)
B2018 AL	4 ¹ / ₂ " (115)	.125 (3.2)	450 (2.00)	26 (11.8)
B2019 AL	5" (125)	.125 (3.2)	450 (2.00)	27 (12.2)
B2020 AL	6" (150)	.125 (3.2)	450 (2.00)	33 (14.9)

Reference page 218 for general fitting specifications. Other channel combinations available-see steel section for styles.