

For
**PTW,
ETW
Series**




Nominal Torque Output:

8135 Nm

Square Drive Range:

1 - 1 1/2 inch

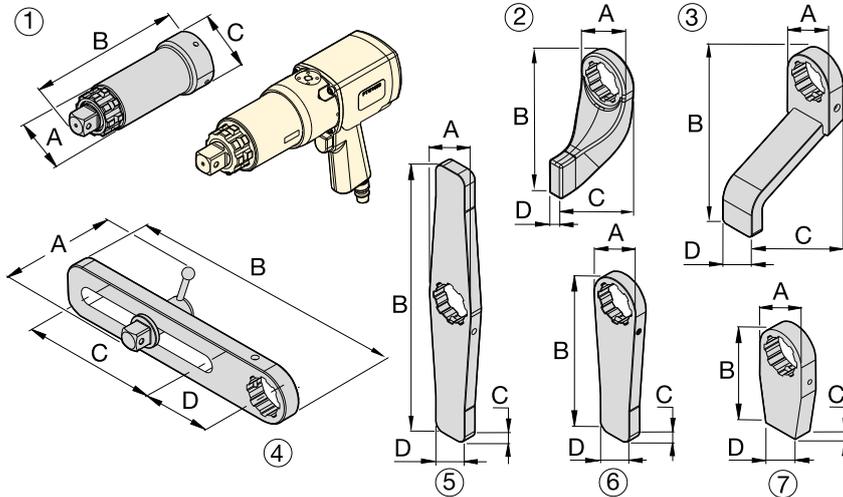

BSH-Series Sockets

Heavy-Duty Impact Sockets for power driven torquing equipment.

Page: **198**



PTW and ETW-Accessories

Enerpac offers the following accessories to support a wide variety of applications in industries such as mining, power generation and oil & gas. For additional custom accessories not pictured here, please contact Enerpac.

Optional Accessories								
For use with PTW and ETW1000, 2000, 3000-models				Dimensions (mm)				
Nr.	Description	Model Nr.	Application	A	B	C	D	
1	Extended Drive, 6 inch (152 mm)	ED6TWS	Nose extension, primarily for truck wheel bolts	62	206	73	-	
1	Extended Drive, 12 inch (305 mm)	ED12TWS	Nose extension, primarily for truck wheel bolts	62	384	73	-	
1	Extended Drive, 18 inch (457 mm)	ED18TWS	Nose extension, primarily for truck wheel bolts	62	511	73	-	
2	Standard Reaction Arm	RATWS	Standard arm included with PTW and ETW model	76	172	102	21	
3	Extended Reaction Arm	ERATWS	Long plate for use with deep well sockets	73	150	202	51	
4	Sliding Reaction Arm	SLRATWS	For widely spaced and uneven bolt centers	112	381	203	102	
5	Double Straight Reaction Arm	DSATWS	Reduces time to reposition arm *	73	406	19	102	
6	Straight Reaction Arm	SRATWS	Long plate for wide spaced reaction points	73	240	19	51	
7	Blank Reaction Arm **	BLTWS	Weldable blank for custom applications **	72	151	25	51	
For use with PTW and ETW6000-models								
1	Extended Drive 6 inch (152 mm)	ED6TWL	Nose extension, primarily for truck wheel bolts	84	232	102	-	
1	Extended Drive 12 inch (305 mm)	ED12TWL	Nose extension, primarily for truck wheel bolts	84	384	102	-	
2	Standard Reaction Arm	RATWL	Standard arm included with PTW and ETW model	102	229	146	32	
3	Extended Reaction Arm	ERATWL	Long plate for use with deep well sockets	102	254	184	64	
4	Sliding Reaction Arm	SLRATWL	For widely spaced and uneven bolt centers	152	419	190	114	
5	Double Straight Arm	DSATWL	Reduces time to reposition arm *	102	508	32	57	
6	Straight Reaction Arm	SRATWL	Long plate for wide spaced reaction points	102	305	32	57	
7	Blank Reaction Arm **	BLTWL	Weldable blank for custom applications **	102	152	32	57	

* Time to reposition arm when repeatedly moving from tightening to loosening.

** WARNING: Blank reaction arms must be heat treated to HRc 38-42 prior to use.