

Non-Metallic Raceway, Latching WallTrak,
WallTRAK2, Base and Cover, 7' Length

By Hubbell Premise Wiring
Catalog # [PW2BC7](#)

Non-Metallic Raceway Latching WallTrak, WallTRAK2,Base and
Cover, 7'

Features

- UL Listed and CSA Certified to 600 volts
- Single and two channel latching raceways are dual-rated for both power and data applications, reducing inventory requirements

Application

7' Base and Cover

Performance

Environmental - Flame Rating - UL94V-0, Environmental -
Temperature Range - -25.6° to 158° F

Specifications


Non Hazardous Location	Non Hazardous
Industry Standard(s)	• CSA Standard C22.2 no. 62 • E118895 / E119190 • UL Standard UL 5A
EU RoHS Indicator	Yes

Configuration

Knockouts	None
-----------	------

Dimensions

Width	2.12 in
-------	---------

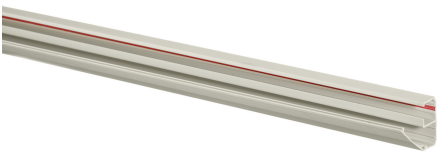

Length	7 ft
--------	------

General

Item Type	PW2, 2-Channel WallTrak-Latching
Construction Type	Extruded Plastic
Enclosure Type	Base and Cover
Series	NEMA 1 Rating
Cover Type	PW2
Material	Removable
Specifications	Thermoplastic

- Crush Resistance - 300 lbs.
- Impact Resistance - 5 ft. lbs.
- Length - 7 ft. (2.1m)
- Material - UV Stabilized PVC

UPC	783585090627
Style	Two Channel, Latching
Color	Office White

Logistics

Carton Quantity	70
-----------------	----

Product Assets

- [Catalog \[English\]](#)
- [Catalog \[English\]](#)
- [Catalog Page \[English\]](#)
- [Catalog Page \[English\]](#)