

## Accessories

### OPTIMYZER<sup>®</sup>

## Low Bay Replacement Lens

# HUBBELL

### Features

- 360° Lens for low bay applications
- 3 to 1 radius-to-mounting height, 8' to 16' sensor mounting height

### Ordering Information

| Description                        | Device Color | UPC Number   | Catalog Number |
|------------------------------------|--------------|--------------|----------------|
| 360° Lens for low bay applications | White        | 783585564845 | LBRL360        |

### Listings

cULus Listed


### Specifications

|          |                                             |
|----------|---------------------------------------------|
| Casing   | High-impact injection-molded thermoplastic  |
| Size     | 3.25" Diameter x 1.25 height                |
| Weight   | 0.8 oz                                      |
| Mounting | Insert and twist clockwise on sensor's face |

### Performance

#### Environment

|                       |                               |
|-----------------------|-------------------------------|
| Operating Location    | Indoor use only               |
| Operating temperature | 32°F to 149°F (-40°C to 65°C) |
| Relative humidity     | 0% to 95%                     |

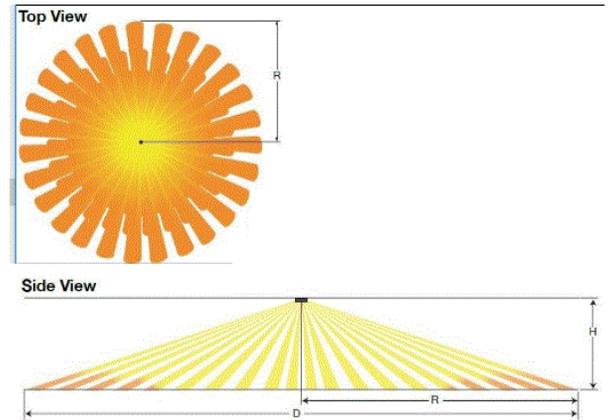

### Online Resources

eCatalog  
Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

