




MCX24 - MCX Series - Aluminum Cable Connector 3/4" NPT Barrier 45°

By Killark
Catalog # [MCX24](#)

MCX Series - Aluminum Cable Connector 3/4" NPT Barrier 45°

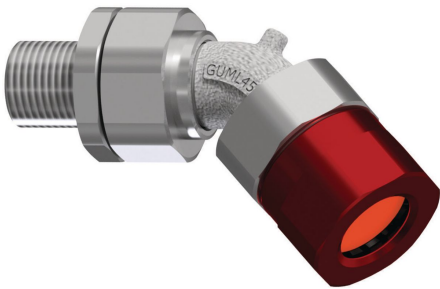

Features

- 360° armor grounding spring is reusable
- Provides a barrier seal between the individual insulated cores within the cable
- Assembly of the cable gland compresses and distributes the compound evenly to create a barrier seal at the point of entry into the enclosure
- Provides a cable retention and low smoke fume, zero halogen seal onto the cables outer sheath
- Copper free aluminum construction for harsh corrosive and hazardous areas
- Patent pending combination union elbow that allows proper 360° alignment where space is limited
- Compact 45° bend for optimized wiring configurations
- Armor is terminated prior to bend allowing for minimal bending radius
- Backnut is anodized RED to indicate Hazardous area product

Specifications

Hazardous Rating(s)	• Class I, Divisions 1 & 2, Groups A, B, C, D • Class II, Divisions 1 & 2, Groups E, F, G • Class III, Divisions 1 & 2
---------------------	--

EU RoHS Indicator	• Class I, Zones 1 & 2, Groups IIC, IIB, IIA
Nema Rating	• Zone 20
Buy America(n) Qualified	Contact Manufacturer 3, 4, 4X
	Contact Manufacturer

Conductor

Cable Range	.73 - 1.03 in
-------------	---------------

Dimensions

Hub Size	3/4"
----------	------

General

Type	Cable Gland
Series	MCX Series
Material	Aluminum, Copper Free (less than 4/10 of 1%)
UPC	783936154176
Style	45 Degree

Product Assets

- [Catalog \[English\]](#)
- [Installation Manual \[English\]](#)
- [Installation Manual \[English\]](#)