


PRODUCT INFORMATION PACKET



Model No: 5K49MN4620

Catalog No: K607

Severe Duty Motor, 0.75 HP, 3 Ph, 60 Hz, 230/460 V, 1800 RPM, 56C Frame, TEFC

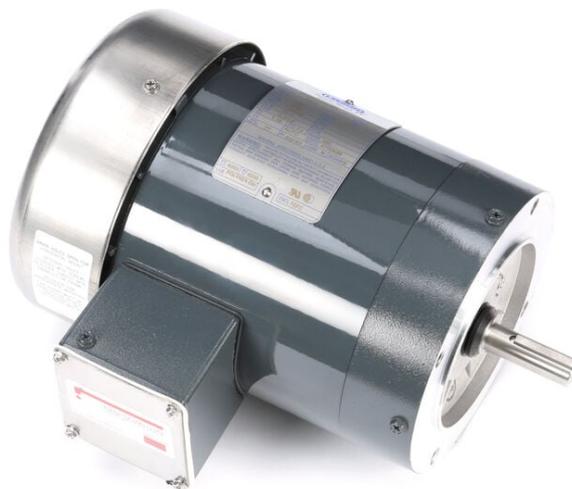

Regal and LEESON are trademarks of Regal Rexnord Corporation or one of its affiliated companies.
©2025 Regal Rexnord Corporation, All Rights Reserved. MC017097E





Nameplate Specifications

Phase	3	Output HP	0.75 Hp
Output KW	0.56 kW	Voltage	230/460 V
Speed	1725 rpm	Service Factor	1.15
Frame	56C	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	Automatic	Efficiency	77 %
Ambient Temperature	40 °C	Frequency	60 Hz
Current	3.0/1.5 A	Power Factor	62
Duty	Continuous	Insulation Class	F
Design Code	B	KVA Code	N
Drive End Bearing Size	6205	Opp Drive End Bearing Size	6203
UL	Recognized	CSA	Y
CE	N	IP Code	56
Number of Speeds	1		

Technical Specifications



Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	4	Rotation	Reversible
Resistance Main	17.08 Ohms	Mounting	Round
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	NEMA 56	Overall Length	11.69 in
Frame Length	5.50 in	Shaft Diameter	0.625 in
Shaft Extension	2.06 in	Assembly/Box Mounting	F1 ONLY
Outline Drawing	028716ME-550	Connection Drawing	005010.20ME

4

3

2

1

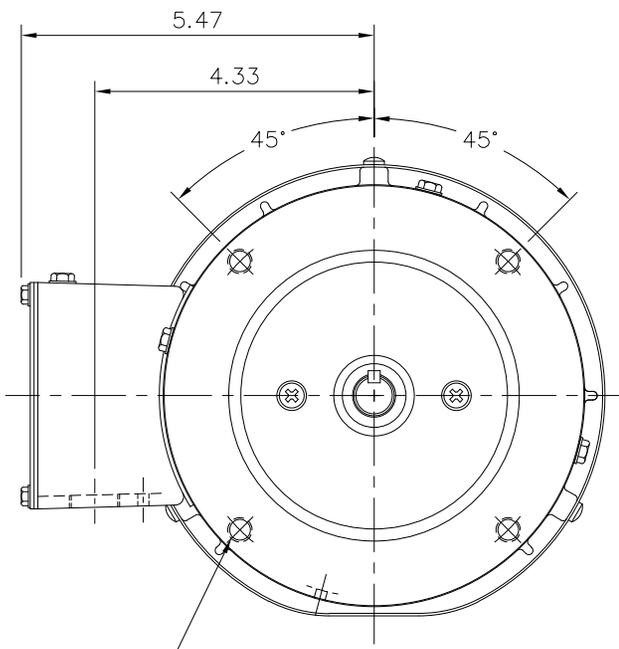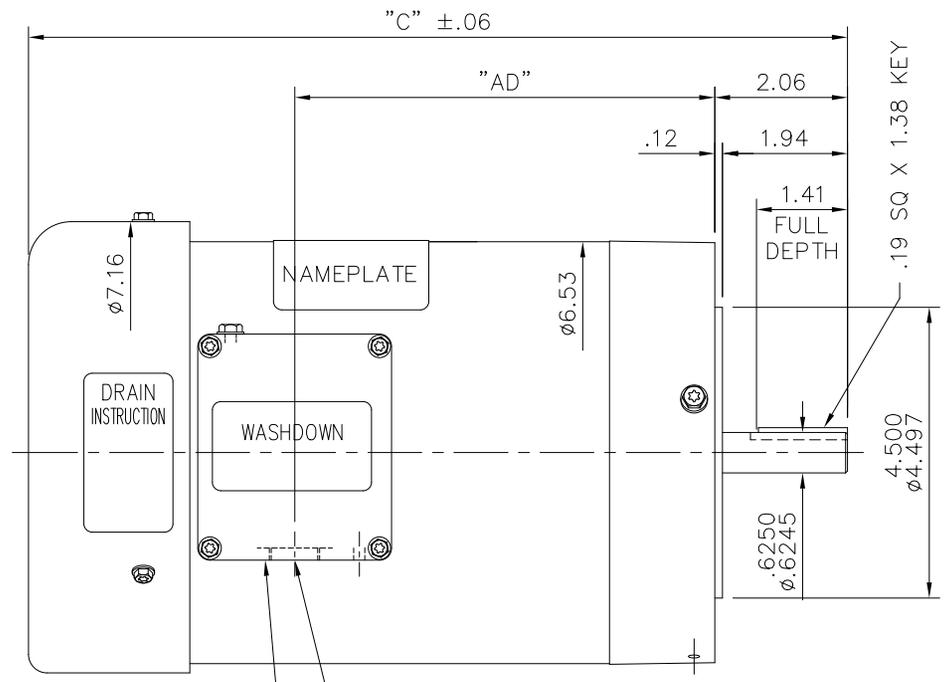

(4) 3/8-16 UNC-2B X .56 DEEP ON A Ø5.875 B.C.

DECAL- CONNECTION & T'STAT. UNDER COVER (WHEN REQ'D)

(1) 1/2-14 NPT (PLUGGED)

SPECIAL FEATURES:

- 1) SHAFT SEALS & V-RING
- 2) DRAIN HOLES IN BOTH ENDBELLS & CONDUIT BOX
- 3) GASKETS THROUGHOUT
- 4) STAINLESS STEEL SHAFT, HARDWARE & NAMEPLATE

DASH NO.	"C"	"AD"
450	10.69	4.50
500	11.19	5.00
550	11.69	5.50
600	12.19	6.00
650	12.69	6.50

MAXIMUM FACE RUNOUT .004 T.I.R.
 MAXIMUM PILOT ECCENTRICITY .004 T.I.R.
 PERMISSIBLE SHAFT RUNOUT .002 T.I.R.

DRAWING REVISION C	REVISION BY KVDG	REV DATE/ DATE 07/31/2025	TOLERANCES (EXCEPT AS NOTED): DEC. INCH mm ANGLE .X ±0.1 [±3] ±7'30" .XX ±0.03 [±0.8] .XXX ±0.005 [±0.13] .XXXX ±0.0005 [±0.013] REMOVE BURRS & BREAK SHARP EDGES: .003/.015 [.08/.38] X 45° CORNER FILLETS: R.02 [.5] MACHINED SURFACES: 125/3.2 INCH/mm	DRAWN BY LST	Regal Beloit America, Inc.	
REQUEST NUMBER ECR-0244746	APPROVED BY DS	DATE 07/31/2025		DATE 07/09/2009		
REQUEST NUMBER DESCRIPTION UPDATED FROM MARATHON TO RRX TEMPLATE				APPROVED BY	DESCRIPTION OUTLINE - 56C FRAME TEFC - "C" FRAME	
COPYRIGHT (PER REVISION DATE) REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED. PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF REGAL BELOIT AMERICA, INC. (OWNER) AND CONTAINS OWNER'S PROPRIETARY INFORMATION. ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED, BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.				DATE	MAT'L	PROCESS/FINISH
			REFERENCE 112644	THIRD ANGLE PROJECTION	SIZE A	DRAWING NUMBER 028716ME


4

3


2

1

VIEW FROM OUTSIDE OF MOTOR AT SWITCH END.

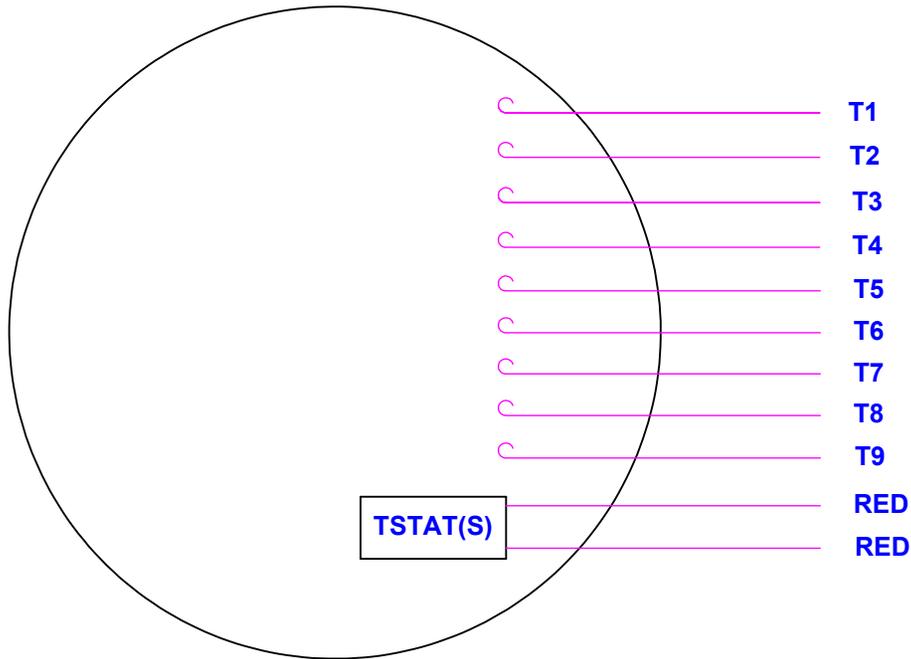

LINE LEADS

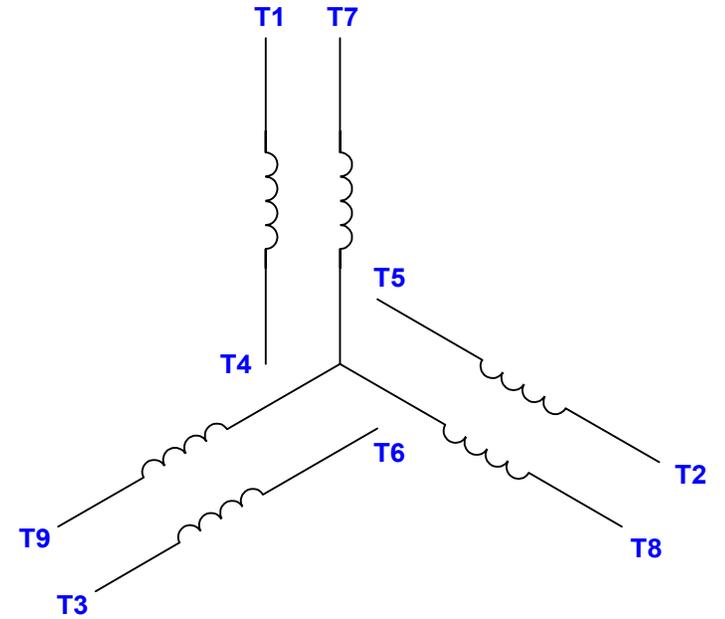

VOLTAGE	L1	L2	L3	JOIN & INSULATE
HIGH	T1	T2	T3	(T4, T7) (T5, T8) (T6, T9)
LOW	T1, T7	T2, T8	T3, T9	T4, T5, T6

RBC PROPRIETARY AND CONFIDENTIAL INFORMATION
 This document is the property of REGAL BELOIT CORPORATION ("RBC") including its subsidiaries and divisions and contains proprietary information of RBC. This document is loaned on the express condition that neither it nor the information contained therein shall be disclosed to others without the express written consent of RBC, and that the information shall be used by the recipient only as approved expressly by RBC. This document shall be returned to RBC upon its request. This document may be subject to certain restrictions under U.S. export control laws and regulations.

				TOLERANCES UNLESS SPECIFIED		DRAWN RDW 04/13/04	
				DEC	INCHES	CHK	
				.X	±.1	APPR	
				.XX	±.01	SCALE 1:1	
1	CHG FROM MARATHON TO RRX TEMPLATE AS PER ECR-0237142	KVDG 09/19/24	DS	.XXX	±.005	REF	
--	REDRAWN IN SOLIDWORKS	VJB 02/08/11		.XXXX	±.0005	MAT'L DECAL - 004014 (TSTAT) - 080582	
NO	REVISION	BY & DATE	CHK	ANG	±1/2°	PAGE OF	
THIRD ANGLE PROJECTION			RFP	PREV		SIZE	DRAWING NO
			NETWORK FILE NAME		00501020ME	A	005010-20ME
							REV
							1



Regal Beloit America, Inc.

TITLE EXTERNAL WIRING DIAGRAM
3 PHASE



DATA VOLTS: 460

CERTIFICATION DATA SHEET

CUSTOMER:		CUSTOMER P.O. #:	
ORDER #:		REFERENCE MODEL #:	5K49MN4620
CONN. DIAGRAM:	005010.20ME	CAT #:	K607
OUTLINE:	028716ME-550	CUSTOMER PART #:	
WINDING:	T634377 NONE 3	MOUNTING:	F1 ONLY
SPEED:			

TYPICAL MOTOR PERFORMANCE DATA

HP	KW	SYNC RPM	FL RPM	FRAME	ENCLOSURE	TYPE	KVA CODE	DESIGN
0.75	0.56	1800	1749	56	TEFC	NA	N	B

PH	HZ	VOLTS	AMPS	START TYPE	DUTY	INSL	S.F.	AMB	ELEV.
3	60	230/460	2.9/1.45	ACROSS THE LINE	CONT	F	1.15	40	3300

F.L. EFF	77.6	3/4 LD EFF	76.0	1/2 LD EFF	70.9	GTD EFF	0.0	ELECT. TYPE	SQ CAGE IND RUN
F.L. PF	62.4	3/4 LD PF	53.5	1/2 LD PF	41.5				

F.L. TORQUE	LR AMPS @ 460 V	L.R. TORQUE	B.D. TORQUE	F.L. RISE (°C)
575 LB-FT	10.5	2,653 LB-FT 461%	3,005 LB-FT 523%	45

@ 3 FT.	POWER	ROTOR WK ²	MAX. LOAD WK ²	SAFE STALL TIME	STARTS/HOUR	MOTOR WGT
999 dBA	1008 dBA	0.07 LB-FT ²	0.1 LB-FT ²	0 SEC.	0	0 LB.

***** SUPPLEMENTAL INFORMATION *****

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	MOTOR ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
STANDARD	STANDARD	ROUND	HORIZONTAL	NO	NONE	NO	NONE	GRAY - EPOXY

BEARINGS		GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT MATERIAL	FRAME MATERIAL
DE BALL	ODE BALL	POLYREX EM	STANDARD 56	NONE	NONE	1144 STRESSPROOF (C-223)	ROLLED STEEL
6205	6203						

THERMOSTATS	PROTECTORS	WDG RTD's	BRG RTD's	THERMISTORS	CONTROL	SPACE HEATERS
NONE	AUTOMATIC	NONE	NONE	NONE	FALSE	NA

R1 (ohms/ph)	R2 (ohms/ph)	X1 (ohms/ph)	X2 (ohms/ph)	Xm (ohms/ph)	VIBRATION (in/sec)	FLOAT
0	0	0	0	0	0.080	ODE

* N O T E S *	INVERTER TORQUE: NONE	
	INV. HP SPEED RANGE: NONE	
	ENCODER: NONE	
	NONE PPR	

PREPARED BY: FAREEDA DUDEKULA DATE: 9/19/2018	BRAKE: NONE	
	NONE NONE	
	FT-LB: NA	
	VOLTAGE: NONE HZ:	
FORM: 3531 REV_4 2/27/06		UL: X-GE-INS, CONST, AUTO PRT UL REC

Data Sheet

Date: 12/13/2018
 Customer: _____
 Attention: _____
 Submitted by: FAREEDA DUDEKULA



5K49MN4620

Submittal

Data @ 460 V

Motor Load Data

Load	0%	25%	50%	75%	100%	115%	125%	LR
Current (Amps)	1.12	1.17	1.21	1.31	1.45	1.53	1.60	10.5
Torque (ft-lb)	0.00	144	288	433	575	10,361	721	2,653
RPM	1800	1780	1773	1762	1749	1,744	1736	0
Efficiency (%)		43.5	70.9	76.0	77.6	78.6	79.5	
P.F. (%)	11.4	35.1	41.5	53.5	62.4	65.5	68.6	0.0

Motor Speed Data

	LR	Pull-Up	BD	Rated	Idle
Speed (RPM)	0	900	1656	1749	1800
Current (Amps)	10.5	9.7	6.3	1.45	1.12
Torque (ft-lb)	2,653	2,622	3,005	575	0.00

Information Block

HP	0.8			
Sync. RPM	1800			
Frame	56			
Enclosure	TEFC			
Construction	TF			
Voltage	230/460 V			
Frequency	60 Hz			
Design	B			
LR Code letter	N			
Service Factor	1.15			
Temp Rise @ FL	45 °C			
Duty	CONT			
Ambient	40 °C			
Elevation	1,000 feet			
Rotor/Shaft wk ²	0.07 Lb-Ft ²			
Ref Wdg	T634377 NONE			
Sound Pressure @ 1M	999 dBA			
VFD Rating	NONE			
Outline Dwg	028716ME-550			
Conn. Diag	005010.20ME			
Additional Specifications:				
0				
0				
EQUIV CKT (OHMS / PHASE)				
R1	R2	X1	X2	Xm
0.0000	0.0000	0.0000	0.0000	0.0000

