

PRODUCT INFORMATION PACKET



Model No: M1135245.00
Catalog No: M1135245.00
Parallel Shaft Gearmotor, 0.25 HP, 12 V, 62 RPM, 34 Frame, TENV



Regal and LEESON are trademarks of Regal Rexnord Corporation or one of its affiliated companies.
©2025 Regal Rexnord Corporation, All Rights Reserved. MC017097E





Nameplate Specifications

Output HP	0.25 Hp	Output KW	0.19 kW
Voltage	12 V	Speed	62 rpm
Service Factor	1.0	Frame	34
Enclosure	Totally Enclosed Non Ventilating	Thermal Protection	No Protection
Efficiency	62.3 %	Ambient Temperature	40 °C
Current	21.0 A	Duty	Continuous
Insulation Class	F	Drive End Bearing Size	6201
Opp Drive End Bearing Size	608	UL	Recognized
CSA	Y	CE	N

Technical Specifications

Rotation	Reversible	Mounting	Special
Shaft Type	Parallel	Overall Length	13.31 in
Frame Length	6.06 in	Shaft Diameter	0.750 in
Shaft Extension	1.625 in	Torque	220 LB-IN
Outline Drawing	M1030807-M1135245	Connection Drawing	M100514301


This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:04/08/2025

ERROR: syntaxerror
OFFENDING COMMAND: --nostringval--

STACK:

-dictionary-
/Pscript_WinNT_Compat
-dictionary-

D.C. MOTORS

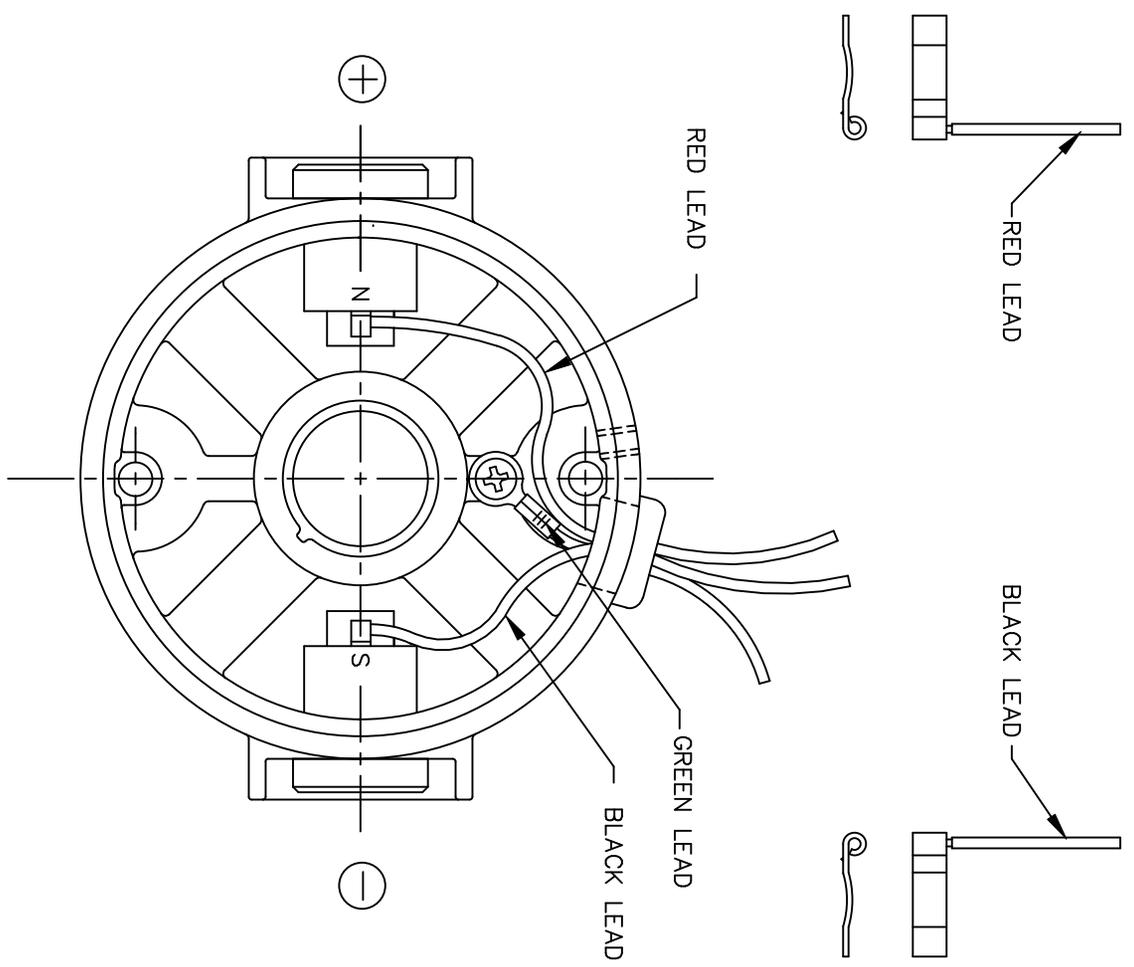

EXTERNAL CONNECTIONS FOR CW ROTATION
 VIEWING LEAD END OF MOTOR WITH RED LEAD
 POSITIVE AND BLACK LEAD NEGATIVE (-)
 FOR CCW ROTATION REVERSE POLARITY

				TOLERANCES UNLESS OTHERWISE SPECIFIED		LEESON ELECTRIC CORPORATION			
				DECIMALS					
03	CORRECTED "N" AND "S", ECR 80000 (PER B.C.)	VS	08/15/02	.00	± .01	DRAWN DWF 3/26/93	TITLE CONNECTION DIAGRAM		
02	ROTATED DETAIL VIEWS OF LEADS	SAD	2/4/98	.000	± .005	CH'K'D.			
01	REVERSE ROTATION WAS CW	SPV	6/3/94	.0000	± .0005	APPR.	MAT'L.		
NO.	REVISION	BY	DATE	FRACTIONS	± 1/64	SCALE 1=1			
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED				ANGLES	± 1/2'	REF. M1005124	FINISH LEESON	SIZE A	DRAWING NO.
				INCH/MM		FMF M1125046	STOCK		M1005143-01

```
ERROR: syntaxerror  
OFFENDING COMMAND: --nostringval--
```


```
STACK:
```

```
/p2e  
-savelevel-
```

LEESON ELECTRIC CORPORATION

TYPICAL PERFORMANCE CURVE FOR DIRECT CURRENT PERMANENT MAGNET MOTOR

Model No. <u>CM34D25NZ156</u>	Catalog No. <u>M1135245.00</u>	
HP <u>0.250</u>	RPM <u>62</u>	DC Volts <u>12.0</u>
F.F. <u>1.00</u>	Encl <u>TENV</u>	N.P. FLA <u>21.00</u>
Max. Amb. <u>40.0 Deg C</u>	Insul. <u>F</u>	Type <u>DN</u>
	Frame <u>34</u>	S.F. <u>1.00</u>
		Duty <u>Cont</u>

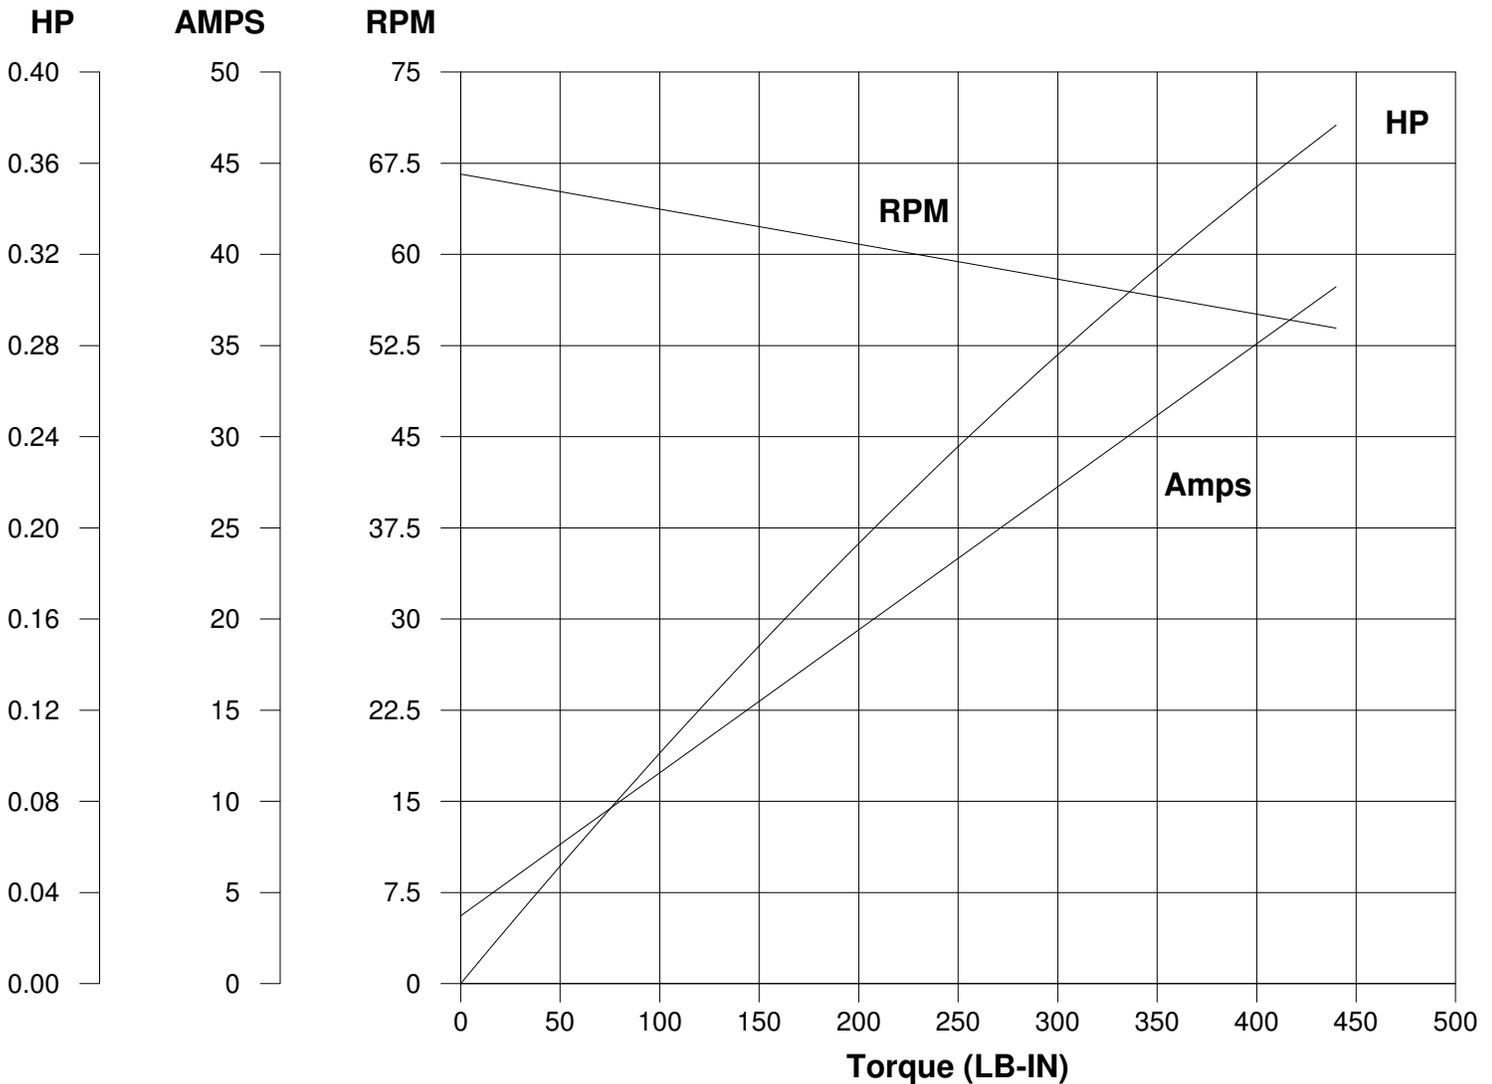

Ra 0.05300 Ohms
La 0.1200 mHenrys
Ja 0.6440 LB-IN²
Ke 3.908 V/KRPM

Kt 0.3304 LB-IN/AMP
Imax 344.8 AMPS Allowed
FL Torque 220.0 LB-IN
FL EFF 62.30 %

Winding W- MD342107-1 **Prepared by** V. Boehlen **Date** 10-26-2005