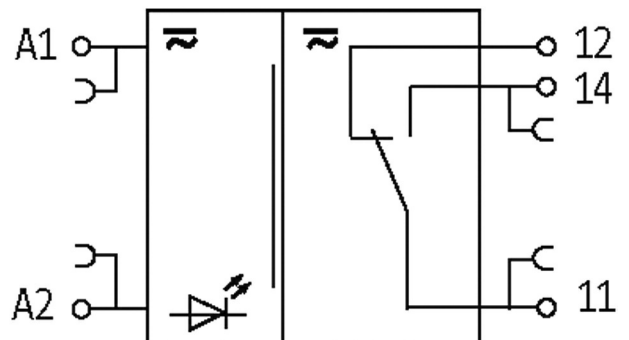
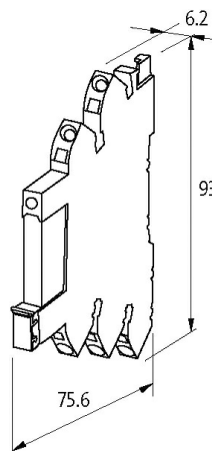


MIRO 6.2 PLUGGABLE COMPL.MODULE OUTPUT RELAY

IN: 24 VAC/DC - OUT: 250 VAC/30VDC / 6 A

1 NO/NC contact
 6 A
 24 V AC/DC
 Spring clamp terminals

Illustration

Product may differ from Image

Approvals

**Input**

Connection voltage - current	24 V AC/DC (19.2...28.8 V AC/DC) - 12 mA
LED display	LED (green)

Output

Switching voltage	max. 250 V AC/30 V DC
Switching current per output	max. 6 A
Min. load current	100 mA
Power rating (voltage dependent)	max. 1500 VA/180 W
Switching frequency	max. 10 Hz
Contact material	Ag Sn O ₂
Energize/release/contact bounce time	8/4/- ms

Utilization category

AC-12	6 A (24/110/230 V AC)
AC-15	3 A (24/110 V AC); 1.5 A (230 V AC)
DC-13	1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC)

General data

Test isolation voltage	250 V
Mech./ elect. life	10 000 000 switching cycles (NO) 30 000; (NC) 10 000, load dependent
Protection	IP20
Mounting method	DIN-rail mountable (EN 60715)
Dimensions H×W×D	93×6.2×75.6 mm
Temperature range	-25...+60 °C

Commercial data

country of origin	CN
customs tariff number	85364900
EAN	4048879021432
eClass	27371601
Packaging unit	1