

**M12 female 0° with cable**

PVC 8x0.25 gy 55m

Female straight


M12, 8-pole

Art-No. 7005 - M12 Lite - (plastic hexagonal screw) on request  
with cable sleeves



Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Further cable lengths on request.

**Illustration**

Female

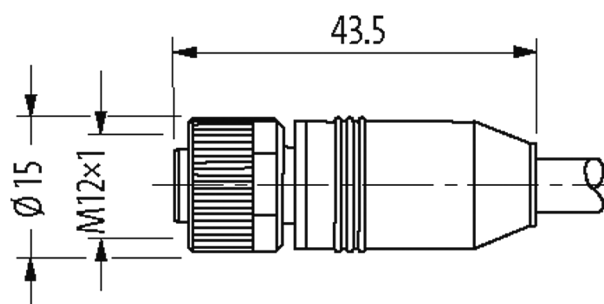

Product may differ from Image

**Approvals**

\* only for products with UL/CSA approved cable

cCSAus

**Form**

Form

17041

**Cables**

|                                    |                                                                                                          |
|------------------------------------|----------------------------------------------------------------------------------------------------------|
| No./diameter of wires              | 8× 0.25 mm <sup>2</sup>                                                                                  |
| Wire isolation                     | PVC (bl, wh, gn, ye, gr, pk, rd, br)                                                                     |
| Material (jacket)                  | PVC                                                                                                      |
| Outer Ø                            | 6.0 mm ±5%                                                                                               |
| Bend radius (moving)               | 12× outer Ø                                                                                              |
| Temperature range (fixed)          | -40...+70 °C                                                                                             |
| Temperature range (mobile)         | -5...+70 °C                                                                                              |
| Cable identification               | 293                                                                                                      |
| Approval (cable)                   | CE conform                                                                                               |
| Cable weight [g/m]                 | 58,30                                                                                                    |
| Material (wire)                    | Cu wire, bare                                                                                            |
| Resistor (core)                    | max. 78 Ω/km (20 °C)                                                                                     |
| Single wire Ø (core)               | 0.15 mm                                                                                                  |
| Construction (core)                | 14× 0.15 mm (multi-strand wire class 5)                                                                  |
| Diameter (core)                    | 8× 0.25 mm <sup>2</sup>                                                                                  |
| AWG                                | similar to AWG 24                                                                                        |
| Material (wire isolation)          | PVC                                                                                                      |
| Material property (wire isolation) | CFC-, cadmium-, silicone- and lead-free                                                                  |
| Shore hardness (wire isolation)    | 90 ±3 A                                                                                                  |
| Wire-Ø incl. isolation             | 1.2 mm ±5%                                                                                               |
| Color/numbering of wires           | br, wh, rd, bl, pk, gr, ye, gn                                                                           |
| Stranding combination              | 8 wires twisted around central filler                                                                    |
| Shield                             | no                                                                                                       |
| Material (jacket)                  | PVC                                                                                                      |
| Material property (jacket)         | CFC-, cadmium-, silicone- and lead-free, matt, low-adhesion, machine easy to process, abrasion-resistant |
| Shore hardness (jacket)            | 78 ±3 A                                                                                                  |
| Outer-Ø (jacket)                   | 6.0 mm ±5%                                                                                               |
| Color (jacket)                     | gray                                                                                                     |
| chemical resistance                | good resistance to oil, gasoline and chemicals                                                           |
| thermal resistance                 | flame retardant DIN VDE 0482 Teil 332-1-2 / IEC 60332-1-2                                                |
| Nominal voltage                    | 300/300 V AC                                                                                             |
| Test voltage                       | 2000 V AC                                                                                                |
| Temperature range (fixed)          | -40...+70 °C                                                                                             |
| Temperature range (mobile)         | -5...+70 °C                                                                                              |
| Bend radius (moving)               | 12× outer Ø                                                                                              |
| Jacket Color                       | gray                                                                                                     |

**Technical Data**

|                                    |                                                                  |
|------------------------------------|------------------------------------------------------------------|
| Operating voltage                  | max. 30 V AC/DC                                                  |
| Operating voltage (only UL listed) | max. 30 V AC/DC                                                  |
| Rated surge voltage                | 0.8 kV                                                           |
| Operating current per contact      | max. 2 A                                                         |
| Material group                     | IEC 60664-1, category I                                          |
| Coding                             | A-coded                                                          |
| Locking of ports                   | Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing |
| Compression gland                  | M12 (SW13)                                                       |
| Protection                         | IP65, IP66K, IP67 inserted and tightened (EN 60529)              |
| Locking material                   | Zinc die casting, matte nickel plated                            |
| Material                           | PUR                                                              |

**General data**

|                  |   |
|------------------|---|
| Pollution Degree | 3 |
|------------------|---|

|                       |                                          |
|-----------------------|------------------------------------------|
| Temperature range     | -25...+85 °C, depending on cable quality |
| Standards             | DIN EN 61076-2-101 (M12)                 |
| Commercial data       |                                          |
| country of origin     | CZ                                       |
| customs tariff number | 85444290                                 |
| EAN                   | 4048879715836                            |
| eClass                | 27279218                                 |
| Packaging unit        | 1                                        |
| Sketch                |                                          |



Product may differ from Image