


**M12 MALE 0° / M12 FEMALE 0°**

PVC 8x0,25 GRAY, 4m

Male straight – female straight  
M12 – M12, 8-pole  
Art-No. 7005 - M12 Lite - (plastic hexagonal screw) on request  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.  
Further cable lengths on request.

**Link to Product**

**Illustration**

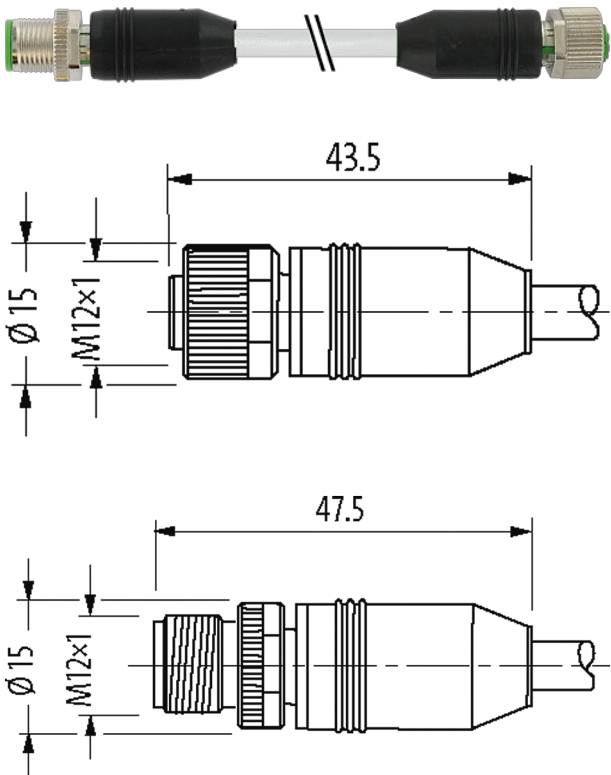

Product may differ from Image

**Approvals**



**Form**

Form 48001

**General data**

|                            |                          |
|----------------------------|--------------------------|
| Standards                  | DIN EN 61076-2-101 (M12) |
| Mounting method            | inserted, tightened      |
| Material (contact)         | Copper alloy             |
| Material (contact surface) | Au                       |
| Material (gasket)          | FKM                      |

|                   |                                          |
|-------------------|------------------------------------------|
| Pollution Degree  | 3                                        |
| Temperature range | -25...+85 °C, depending on cable quality |

#### Cables

|                                    |                                                                                                          |
|------------------------------------|----------------------------------------------------------------------------------------------------------|
| No./diameter of wires              | 8 × 0.25 mm <sup>2</sup>                                                                                 |
| Wire isolation                     | PVC (bl, wh, gn, ye, gr, pk, rd, br)                                                                     |
| Material (jacket)                  | PVC                                                                                                      |
| Outer Ø                            | 6.0 mm ±5%                                                                                               |
| Bend radius (moving)               | 12 × outer Ø                                                                                             |
| Temperature range (fixed)          | -40...+70 °C                                                                                             |
| Temperature range (mobile)         | -5...+70 °C                                                                                              |
| Cable identification               | 293                                                                                                      |
| Approval (cable)                   | CE conform                                                                                               |
| Cable weight [g/m]                 | 58,30                                                                                                    |
| Material (wire)                    | Cu wire, bare                                                                                            |
| Resistor (core)                    | max. 78 Ω/km (20 °C)                                                                                     |
| Single wire Ø (core)               | 0.15 mm                                                                                                  |
| Construction (core)                | 14 × 0.15 mm (multi-strand wire class 5)                                                                 |
| Diameter (core)                    | 8 × 0.25 mm <sup>2</sup>                                                                                 |
| AWG                                | similar to AWG 24                                                                                        |
| Material (wire isolation)          | PVC                                                                                                      |
| Material property (wire isolation) | CFC-, cadmium-, silicone- and lead-free                                                                  |
| Shore hardness (wire isolation)    | 90 ±3 A                                                                                                  |
| Wire-Ø incl. isolation             | 1.2 mm ±5%                                                                                               |
| Color/numbering of wires           | br, wh, rd, bl, pk, gr, ye, gn                                                                           |
| Stranding combination              | 8 wires twisted around central filler                                                                    |
| Shield                             | no                                                                                                       |
| Material (jacket)                  | PVC                                                                                                      |
| Material property (jacket)         | CFC-, cadmium-, silicone- and lead-free, matt, low-adhesion, machine easy to process, abrasion-resistant |
| Shore hardness (jacket)            | 78 ±3 A                                                                                                  |
| Outer-Ø (jacket)                   | 6.0 mm ±5%                                                                                               |
| Color (jacket)                     | gray                                                                                                     |
| chemical resistance                | good resistance to oil, gasoline and chemicals                                                           |
| thermal resistance                 | flame retardant DIN VDE 0482 Teil 332-1-2 / IEC 60332-1-2                                                |
| Nominal voltage                    | 300/300 V AC                                                                                             |
| Test voltage                       | 2000 V AC                                                                                                |
| Temperature range (fixed)          | -40...+70 °C                                                                                             |
| Temperature range (mobile)         | -5...+70 °C                                                                                              |
| Bend radius (moving)               | 12 × outer Ø                                                                                             |
| Jacket Color                       | gray                                                                                                     |

#### Technical Data



|                                    |                         |
|------------------------------------|-------------------------|
| Operating voltage                  | max. 30 V AC/DC         |
| Operating voltage (only UL listed) | 30 V AC/DC              |
| Rated surge voltage                | 0.8 kV                  |
| Operating current per contact      | max. 2 A                |
| No. of poles                       | 8                       |
| Material group                     | IEC 60664-1, category I |
| Coding                             | A-coded                 |
| LED display                        | no                      |

|                                           |                                                                  |
|-------------------------------------------|------------------------------------------------------------------|
| Locking of ports                          | Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing |
| Compression gland                         | M12 (SW13)                                                       |
| Protection                                | IP65, IP66K, IP67 inserted and tightened (EN 60529)              |
| Material                                  | PUR                                                              |
| Locking material                          | Zinc die casting, matte nickel plated                            |
| suitable for corrugated tube (internal Ø) | without                                                          |

Commercial data

|                       |               |
|-----------------------|---------------|
| country of origin     | CZ            |
| customs tariff number | 85444290      |
| EAN                   | 4048879471930 |
| eClass                | 27279218      |
| Packaging unit        | 1             |

Sketch

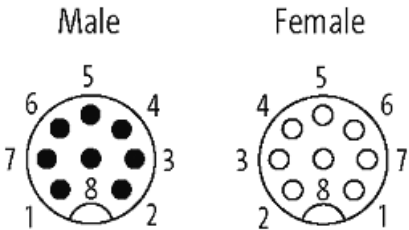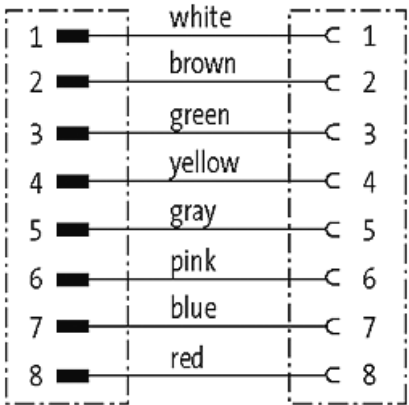

Product may differ from Image