





Interlocking Rubber Mat Niru® Cushion-Ease® GSII™ 856S

Product Images



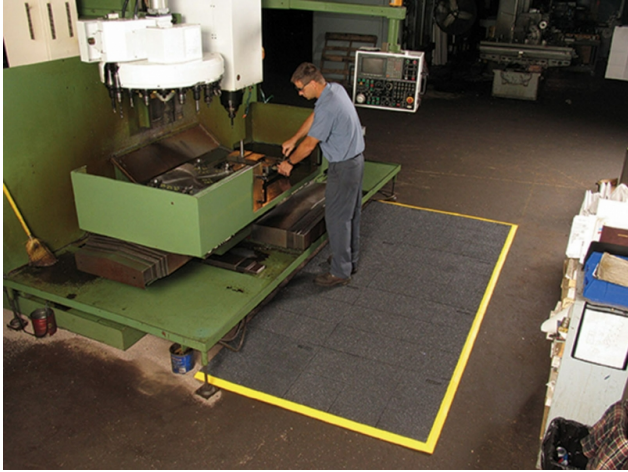

Short Description

- Resilient rubber compound and unique multi-nib support design offers exceptional fatigue relief
- Solid top design with an anti-slip surface texture is easy to clean
- Easy to snap-together system for on-site custom work station platforms
- Nitrile provides highest level of resistance to chemicals, oils and greases
- GSII™ offers the ultimate in durability, performance and traction in harsh environments
- Compatible with any Cushion-Ease® family mats
- 551 M.D. Ramp System® and 552 extra wide M.D.-X Ramp System™ available

Description

Niru® Cushion-Ease® GSII™ Solid is a high performance interlocking anti-fatigue matting system made with a resilient rubber compound with a solid top anti-slip surface texture and a multi-nib backing for comfort and

ergonomic support of the mat. Made of 100% nitrile rubber compound that provides the highest resistance to chemicals, cutting fluids, animal fats, oils and greases. GSII™ has a silicon carbide grit surface for extreme traction in the harshest of work environments. Niru® Cushion-Ease® GSII™ Solid mold has been engineered to produce a mat that is functional, comfortable and durable. All Cushion-Ease® series mats have a male/female interlocking system for individual workstations, long runs, unique configurations and wall-to-wall floors. Also compatible with NoTrax® M.D. Ramp System® for easy on-site custom configurations and trip-resistant platforms.

Specifications

Model No	856S0033BL
Color	Black
Dimensions	3ft x 3ft
Thickness	3/4in
UPC	662641769151
Available Colors	Black
Overall Thickness	3/4
Standard sizes	3'x3'
Group	Ergonomic, Anti-fatigue & Safety Matting
Environment	Wet/Dry and Oily Areas
Special Characteristics	Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals
Recommended Use	For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms
Special Remarks	GSII™ excels in the harshest industrial environments because it resists the chemicals, oils, and greases that cause traditional rubber matting to breakdown.
Surface	Grip Step II®
Edges	Attachable beveled edges are available
Usage Intensity	Heavy duty
Custom Description	Available #551 M.D. Ramp System® or #552 M.D.-X Ramp System™ attachable ramps
Installation	Interlocking mats allow on-site customization. Square snap-together units can be assembled effortlessly.
Material Specifications	100% Nitrile rubber
Process	Compression Molding
Pallet Quantity	36
Weight Lbs/sqft	3.2

Thickness Inch	3/4in
Fire Rating US	Pass
REACH Compliant	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Anti-Fatigue Rating	Best
Slip Resistance Rating	Superior
Wear Resistance Rating	Superior

Prop 65

⚠️WARNING: This product can expose you to chemicals including diisodecyl phthalate which is known to the State of California to cause birth defects or reproductive harm, and beryllium which are known to the State of California to cause cancer. For more information, visit www.P65Warnings.ca.gov. For more information, visit www.P65Warnings.ca.gov.