

# ReeR Safegate Light Curtains – Body Protection

Safegate Type 4 access control barriers provide the ideal solution for protection in a wide range of high-risk industrial applications, in particular those requiring a high level of integration of the muting functions. Safegate greatly simplifies seamless integration of muting sensors with light curtain access control barriers

Hardware configuration  
with integrated status and muting lamp




SMO-3B, SMO-4B, SMO-3B-TRX, SMO-4B-TRX


Hardware or software configuration with  
integrated status and muting lamp



SMPO-3B, SMPO-4B, SMPO-3B-TRX, SMPO-4B-TRX

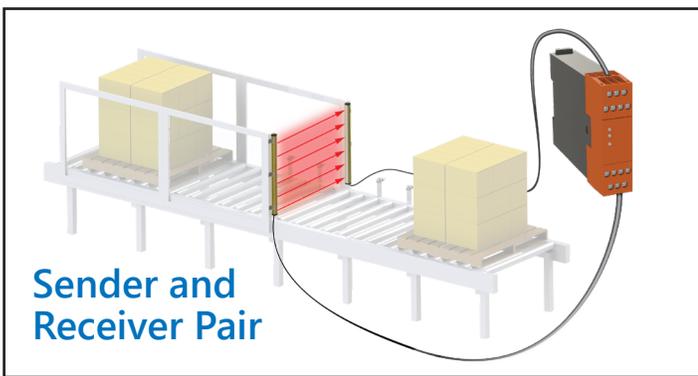


SMO-3B, SMO-4B, SMPO-3B, SMPO-4B

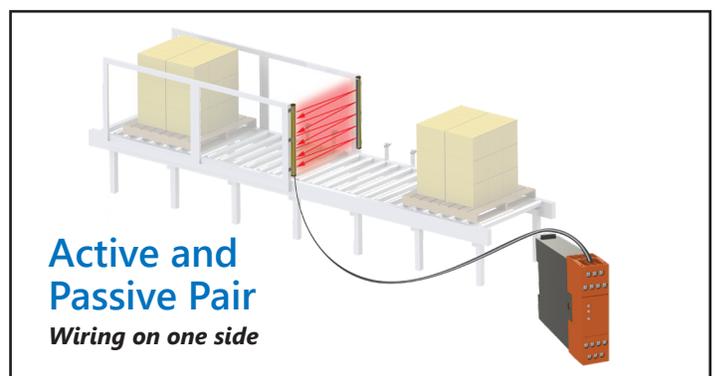


SMO-3B-TRX, SMO-4B-TRX, SMPO-3B-TRX, SMPO-4B-TRX

One way (2 sensor) crossed

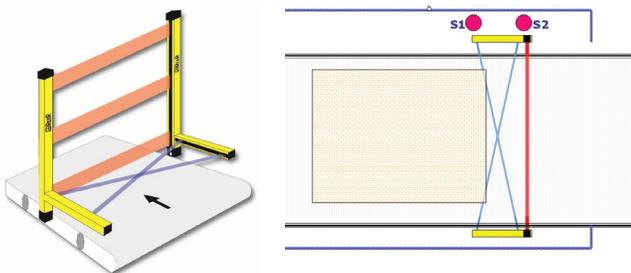


MA-L2X, MZ-L2XP, MZ-L2XP-TRX

One way (2 sensor) parallel

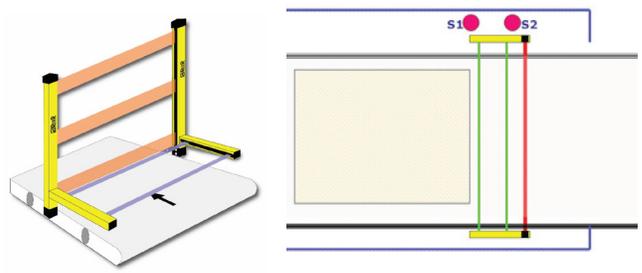


MA-L2P-TRX, MZ-L2XP, MZ-L2XP-TRX

Two way (2 sensor) crossed

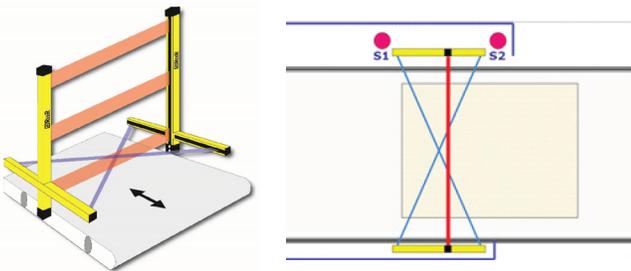

MA-T2X, MZ-T2X, MZ-T2X-TRX

Two way (4 sensor) parallel

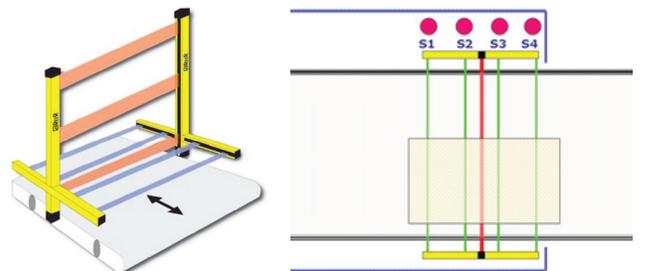


MA-T4P-TRX, MZ-T4P, MZ-T4P-TRX

# ReeR Safegate Light Curtains – Body Protection

## With Muting Arm/Brackets

**Muting Arms:**  
[MA-L2X](#)  
[MA-T2X](#)  
[MA-L2P-TRX](#)  
[MA-T4P-TRX](#)  
 or  
**Muting Brackets:**  
[MZ-L2XP](#)  
[MZ-T2X](#)  
[MZ-T4P](#)  
[MZ-L2XP-TRX](#)  
[MZ-T2X-TRX](#)  
[MZ-T4P-TRX](#)

**Cable**  
 M12 12-pin cable  
 (See recommended items for cabling)

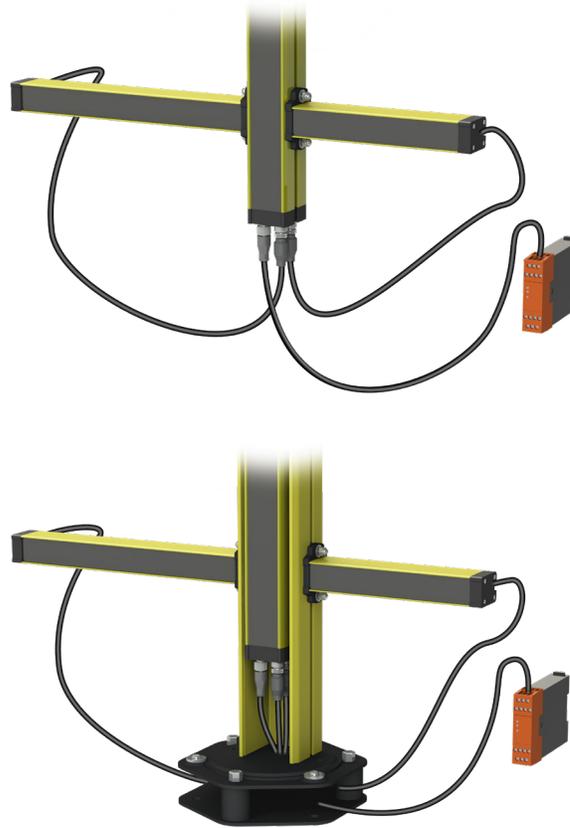

**Light Curtains:**  
[SMO-3B](#)  
[SMO-4B](#)  
[SMPO-3B](#)  
[SMPO-4B](#)  
[SMO-3B-TRX](#)  
[SMO-4B-TRX](#)  
[SMPO-3B-TRX](#)  
[SMPO-4B-TRX](#)  
 If a TRX light curtain is selected, then the muting arms/brackets part number should end in TRX as well.


**Protective Columns (optional)**  
[FMC-SGB3](#) (for SMxO-3B or SMxO-3B-TRX)  
[FMC-SGB4](#) (for SMxO-4B or SMxO-4B-TRX)  
**Protective Column Base:**  
 (Required with Protective Column)  
[FMC-CB](#) (shown)  
 or  
[FMC-CBL](#) (not shown)

## With Muting Photocells

**Photo Cells**  
[M5-A](#)  
[M5-B](#)  
[M-TRX-A](#)  
[M-TRX-B](#)

**Y-Splitters**  
[CSY12TX](#)  
[CSY12RX](#)

**Cable**  
 M12 12-pin cable  
 (See recommended items for cabling)

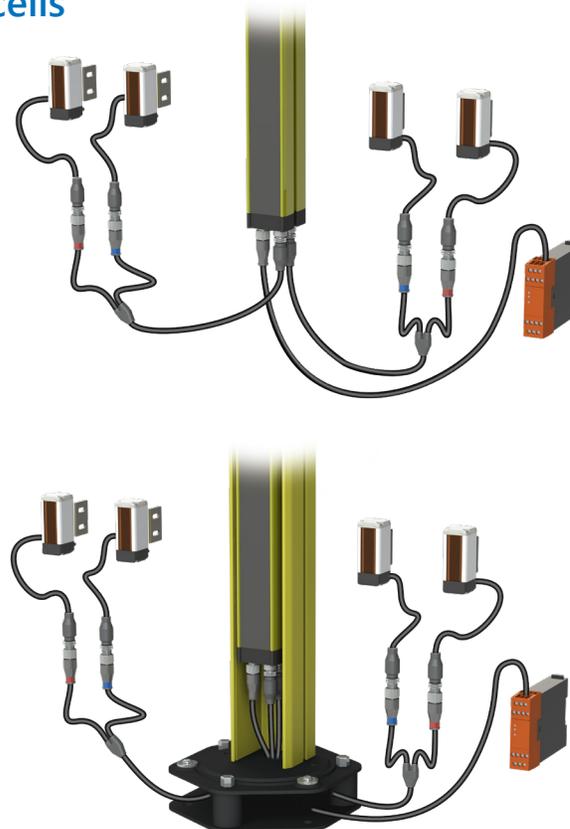

**Light Curtain:**  
[SMO-3B](#)  
[SMO-4B](#)  
[SMPO-3B](#)  
[SMPO-4B](#)  
[SMO-3B-TRX](#)  
[SMO-4B-TRX](#)  
[SMPO-3B-TRX](#)  
[SMPO-4B-TRX](#)  
 If a TRX light curtain is selected, then the muting arms/brackets part number should end in TRX as well.

**Protective Columns (optional)**  
[FMC-SGB3](#) (for SMxO-3B or SMxO-3B-TRX)  
[FMC-SGB4](#) (for SMxO-4B or SMxO-4B-TRX)  
**Protective Column Base:**  
 (Required with Protective Column)  
[FMC-CB](#) (shown)  
 or  
[FMC-CBL](#) (not shown)

# ReeR Muting and Automation Photocells

ReeR Muting and Automation Photocells – Selection Chart					
Part Number	Price	Number of Beams	Sensing Range	Coding	Dimensional Drawing
<b>Emitter/Receiver Versions</b>					
<b>M5-A</b>	\$165.00	5	0 to 3.5 m [0 to 11.48 ft]	A	<a href="#">PDF</a>
<b>M5-B</b>	\$162.00	5	0 to 3.5 m [0 to 11.48 ft]	B	<a href="#">PDF</a>
<b>Reflector Versions</b>					
<b>M-TRX-A</b>	\$120.00	1	0 to 5 m [0 to 16.40 ft]*	A	<a href="#">PDF</a>
<b>M-TRX-B</b>	\$122.00	1	0 to 5 m [0 to 16.40 ft]*	B	<a href="#">PDF</a>




**M5-A / M5-B**


\* Dependent on type of reflector used (see specifications below)

ReeR Muting and Automation Photocells – Specifications			
Model	Micron M5 Emitter	Micron M5 Receiver	M-TRX-A / M-TRX-B
<b>Power Supply</b>	24VDC ± 20%		
<b>Power Consumption at 24VDC</b>	1W		0.2 W
<b>Number of Beams</b>	5		1
<b>Working Range</b>	0-3.5 m [0 to 11.48 ft]		0 to 2.5 m [0 to 8.20 ft] with C3F10 reflector 0 to 3.5 m [0 to 11.48 ft] with C3F8 reflector 0 to 3 m [0 to 9.84 ft] with CD8 reflector
<b>Beams Pitch</b>	10mm [0.39 in]		NA
<b>Immunity to Ambient Light</b>	>10,000 lx (solar)		NA
<b>Emission Angle</b>	±5°	±5°	±5°
<b>Emission Wavelength</b>	940nm (modulated infrared)	-	660nm (modulated red)
<b>Response Time</b>	<10ms	<10ms	65ms
<b>Output</b>	-	PNP 100mA max / dark-on	PNP 100mA max / dark-on
<b>Connections</b>	Pigtail 90cm [2.95 ft] with M12 5 pin connector	Pigtail 90cm [2.95 ft] with M12 5 pin connector	Pigtail 90cm [2.95 ft] with M12 5 pin connector
<b>MTTF<sub>d</sub></b>	414.02 years	414.02 years	1759.31 years
<b>Operating Temperature</b>	-30 to +55°C [-22 to 131°F] (with no condensation)	-30 to +55°C [-22 to 131°F] (with no condensation)	-30 to +55°C [-22 to 131°F] (with no condensation)
<b>Protection Degree</b>	IP65		
<b>Dimensions</b>	Width	28mm [1.10 in]	28mm [1.10 in]
	Depth	30mm [1.18 in]	30mm [1.18 in]
	Height	70mm [2.76 in]	70mm [2.76 in]


**Emitter**



**Receiver**



**TRX**




M5 Emitter				
Pin	Color	Signal	Description	
1	Brown	24VDC	24VDC power supply	
2	White	DISABLE	0VDC=ENABLE	24VDC=DISABLE
3	Blue	0VDC	0VDC power supply	
4	Black	NA	Not connected	
5	Gray	PE	Ground connection	

M5 Receiver				
Pin	Color	Signal	Description	
1	Brown	24VDC	24VDC power supply	
2	White	NA	Not connected	
3	Blue	0VDC	0VDC power supply	
4	Black	OUT	0VDC=Area Free	24VDC=Area Obstructed
5	Gray	PE	Ground connection	

M TRX				
Pin	Color	Signal	Description	
1	Brown	24VDC	24VDC power supply	
2	White	NA	Not connected	
3	Blue	0VDC	0VDC power supply	
4	Black	OUT	0VDC=Area Free	24VDC=Area Obstructed
5	Gray	PE	Ground connection	

**Emitter/Receiver Application**

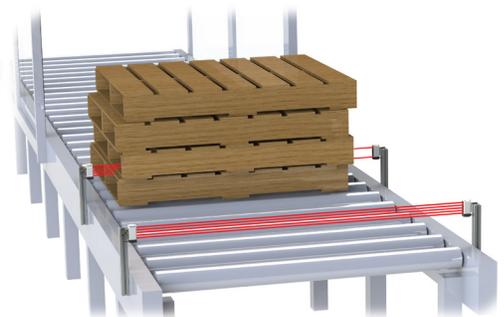

M5 photocells have five beams that are sent out by the emitter. If any one of the five beams is blocked, then the receiver's status signal will change to signify that there is an object in front of the photocell. This is particularly useful when there is a need to detect irregularly shaped items.

# ReeR Safegate Light Curtain Accessories

Safegate Light Curtains Accessories Overview				
Part Number	Price	Description	Use With	Dimensional Drawing
<b>Reflectors</b>				
<a href="#"><b>C3F10</b></a>	\$15.00	ReeR reflector, rectangular, 30 x 116 mm [1.18 x 4.57 in].	<a href="#">M-TRX-A</a> or <a href="#">M-TRX-B</a>	<a href="#">PDF</a>
<a href="#"><b>C3F8</b></a>	\$26.50	ReeR reflector, rectangular, 30 x 78 mm, [1.18 x 3.07 in] with bracket.	<a href="#">M-TRX-A</a> or <a href="#">M-TRX-B</a>	<a href="#">PDF</a>
<a href="#"><b>CD8</b></a>	\$14.50	ReeR reflector, round, 84mm [3.31 in].	<a href="#">M-TRX-A</a> or <a href="#">M-TRX-B</a>	<a href="#">PDF</a>
<b>Mounting Brackets</b>				
<a href="#"><b>SFB-4SG</b></a>	\$57.00	ReeR mounting bracket, replacement, standard, zinc plated steel. Package of 4. Mounting hardware included.	ReeR Safegate Light Curtains	<a href="#">PDF</a>
<a href="#"><b>SFB-6SG</b></a>	\$85.00	ReeR mounting bracket, replacement, standard, zinc plated steel. Package of 6. Mounting hardware included.	ReeR Safegate Light Curtains	<a href="#">PDF</a>
<b>Cables</b>				
<a href="#"><b>CS12USB</b></a>	\$45.00	ReeR programming cable, USB Type A male to 5-pin M12 quick-disconnect, 5-pole, PVC jacket, black, 6.5 ft [2m] cable length.	SMPO models	NA
<a href="#"><b>CSY12RX</b></a>	\$53.00	ReeR muting receiver cable, 5-pin M12 quick-disconnect to (2) 5-pin M12 quick-disconnects, 5-pole, 24 VDC, PVC jacket, black, 1.3 ft [400mm] cable length, IP67.	ReeR Safegate Light Curtains	NA
<a href="#"><b>CSY12TX</b></a>	\$53.00	ReeR muting emitter cable, 5-pin M12 quick-disconnect to (2) 5-pin M12 quick-disconnects, 5-pole, 24 VDC, PVC jacket, black, 1.3ft [400mm] cable length, IP67.	ReeR Safegate Light Curtains	NA



**C3F10**



**SFB-4SG / SFB-6SG**



**CSY12TX / CSY12RX**



**C3F8**



**CD8**



**CS12USB**

**When four M5 muting sensors are installed with a ReeR Safegate light curtain, CSY12TX and CSY12RX Y-splitters will be required.**

## Pinouts

