

## Load ring VLBG 4t M27 with bolt

Artikel-Nr: 7983658




- **Lifting points pivots 360°. Suspension ring pivots 180°**
- **Captive but exchangeable ICE-Bolt** made out of patented steel with special corrosion protection Corrud-DT. Non-hazardous deep temperature usage down to -60°; higher toughness and therefore higher bending strength as well as less wear occurrence. Original ICE-Bolt is available as a spare part. Clear marking at the bolt head: RUD, ICE, thread size, batchno., class of strength.
- **Clamping spring** works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lifting mean possible respectively flat design if turned down.
- **Clear marking of the minimum WLL** for all loading directions.
- Available as:
  - Standard Metric Thread (DIN EN 13)
  - Metric Fine Thread (DIN EN 13)
  - Coarse Pitch Thread UNC (ANSI B1.1)
  - Fine Thread UNF (ANSI B1.1)
- Variable bolt lengths available for tapped or through holes.
- corresponds with the test criteria: "GS-HM-36"
- Quick and easy installation with just one bolt connection.
- Assembly with flat / ring wrench or allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

## Load ring VLBG 4t M27 with bolt

Artikel-Nr: 7983658

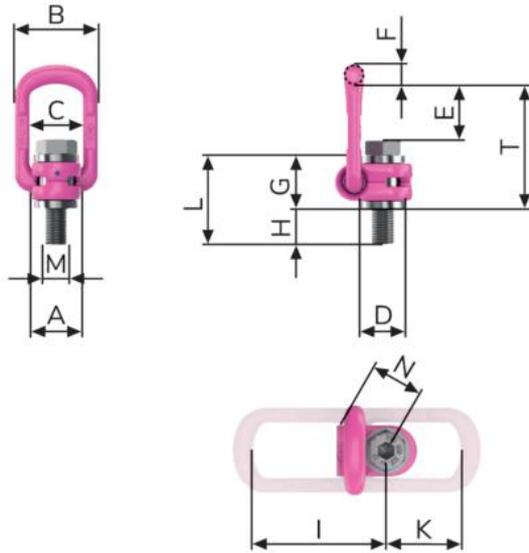

<b>weight</b>	3.07 kg	7.39 lbs
<b>Nominal WLL</b>	4000 kg	8820 lbs
<b>T</b>	147 mm	5-25/32"
<b>A</b>	60 mm	2-3/8"
<b>B</b>	103 mm	4-1/16"
<b>C</b>	65 mm	2-9/16"
<b>D</b>	60 mm	2-3/8"
<b>E</b>	69 mm	2-23/32"
<b>F</b>	22,5 mm	7/8"
<b>G</b>	61 mm	2-13/32"
<b>H</b>	39 mm	1-9/16"
<b>I</b>	151 mm	5-15/16"
<b>K</b>	80 mm	3-1/8"
<b>L</b>	100 mm	3-15/16"
<b>M</b>	M27 mm	M27
<b>N</b>	67 mm	2-5/8"