

PowerPoint WPP-S-0,63t

Artikel-Nr: 7990721




Weldable universal hook connection for ring assemblies, round slings, wire ropes, hook assemblies

- Can be combined with most commercial lifting means without additional connecting element.
- Double ball bearing is the optimal solution for turning and flipping operations under full load.
- Lifting points pivots 360°.
- Parallel to the weld-on surface under nominal WLL.
- Large distance between bolt-on surface and load to avoid damage.
- Ideal connection link for crossbar construction.
- Lowest kinking possibility due to cardan joint.
- Clear marking of the minimum WLL for all loading directions.
- Requirements of the DIN 18800 are fulfilled by the weld arrangement (circular fillet weld), this means non occurrence of contact/crevice corrosion due to the endless weld seam (therefore suitable for outdoor constructions). The circular weld seam Kehlnaht 4 requires only a small welding volume.
- Compact design and high wear resistance due to the usage of high tensile material. ●Material of weld-on-block 1.6541 (23MnNiCrMo52) (please observe user instruction).
- The WLL statement corresponds to the minimum WLL in all loading directions. Higher WLL possible when location and installation is optimised (compare WLL chart).
- Significant product characteristics of the WPP-S, WPP-B, WPP-VIP, WPPH-S, WPPH-B and WPPH-VIP are subject to property right claims.
- Component according to the test criteria of DGUV "GS-HM-36".
- Simple and fast welding installation.

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

PowerPoint WPP-S-0,63t

Artikel-Nr: 7990721

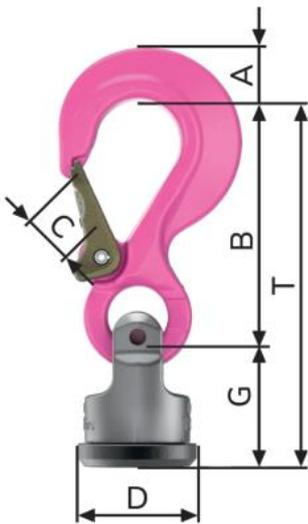

weight	0.38 kg	0.84 lbs
Nominal WLL	630 kg	1390 lbs
T	115 mm	4-1/2"
A	13 mm	1/2"
B	75 mm	2-15/16"
C	18 mm	23/32"
D	40 mm	1-9/16"
G	40 mm	1-9/16"