Load ring VLBG-Z 20t 2"-4 1/2 UNC with RUD-bolt

Artikel-Nr: 8504258

- **Lifting points pivots 360°. Suspension ring pivots 180°**
- **Captive but exchangeable RUD-Bolt** with special corrosion protection Corrud-DT. Original RUD-Bolt is available as a spare part. Clear marking at the bolt head: RUD, thread size, batchno., class of strength.
- **Clamping spring** works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lifting mean possible respectivley flat design if turned down.
- **Clear marking of the minimum WLL** for all loading directions.
- Available as:
  - Standard Metric Thread (DIN EN 13)
  - Metric Fine Thread (DIN EN 13)
  - Coarse Pitch Thread UNC (ANSI B1.1)
  - Fine Thread UNF (ANSI B1.1)
- Variable bolt lengths available for tapped or through holes.
- Component according to the test criterias of DGUV “GS-HM-36”.
- Quick and easy installation with just one bolt connection.
- Assembly with flat / ring wrench or allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
  Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Load ring VLBG-Z 20t 2"-4 1/2 UNC with RUD-bolt

Artikel-Nr: 8504258

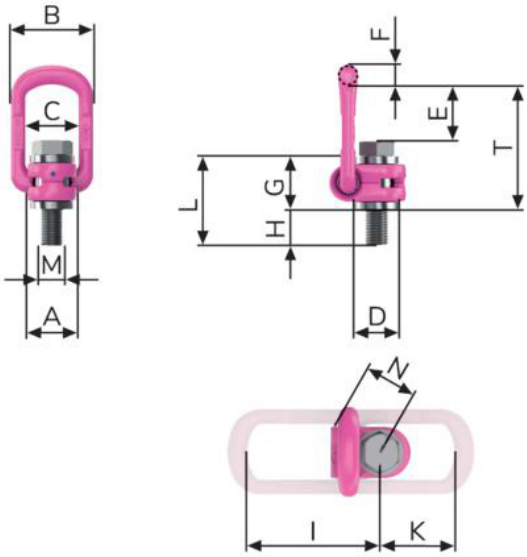

I	230 mm	9-1/16"
K	130 mm	5-1/8"
L	156 mm	6-5/32"
M	2"-4 1/2 UNC mm	2"-4 1/2 UNC
N	100 mm	3-15/16"
weight	11.77 kg	25.95 lbs
Nominal WLL	20000 kg	44090 lbs
T	222 mm	8-3/4"
A	95 mm	3-3/4"
B	156 mm	6-5/32"
C	100 mm	3-15/16"
D	95 mm	3-3/4"
E	105 mm	4-1/8"
F	36 mm	1-27/64"
G	87 mm	3-7/16"
H	69 mm	2-23/32"