

Enclosures **New Sentry Series**

PVC Enclosure 5 x 5 x 2 Inches New Sentry Series with Opaque Lift Off Cover



**Catalog
Number**

J552PVC

UPC


785928500404

DESCRIPTION

5H x 5W x 2D Inches New Sentry Series PVC Enclosures are corrosion resistant, watertight PVC enclosures featuring simple screw down covers. Each enclosure is assembled with a PVC gasket and a screwdown lift-off cover and 4 captive brass cover screws.

APPLICATION

- Designed for general electrical; electronic applications; and any application that has associated environmental concerns
- Thermoplastic PVC junction enclosure designed for general purpose and industrial applications; including outdoor landscaping; agricultural; marinas; car washes; and residential.
- Well-suited for extremely wet applications and corrosive environments both indoor and outdoor
- Small footprint and extra deep features allow use in tight or dense spaces

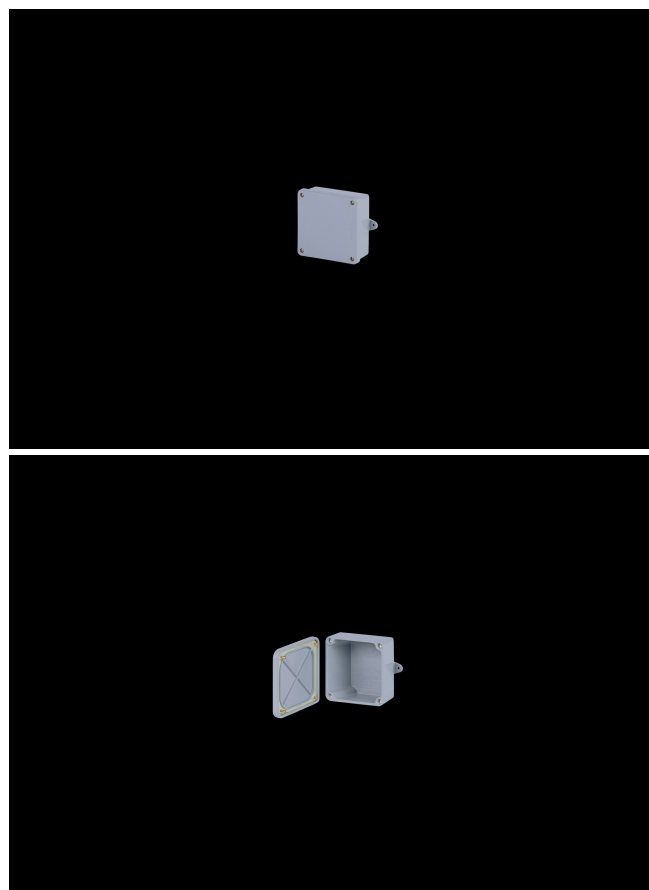

FEATURES

- Corrosion resistant PVC material
- Memory retaining seamless PVC gasket
- Threaded inserts and captive brass cover screws
- Corrosion resistant PVC material
- Integral mounting feet available on some models

General Information

Color	Gray
Cover Type	Opaque
Mounting Type	Wall Mount
Material	PVC
Back Panel Screw Size	
Cover Screw Size	#8-32
Cover Screw Recommended Torque	16-20 in-lbs
Cover Screw Material	Brass
Mounting Foot Screw Size	10-16 Hi-Lo
Installation Mounting Torque	30 in-lbs Max
Metal Inserts	Brass
Gasket Material	PVC Seamless
Country of Origin	USA

DIMENSIONS

Height (in)	5
Width (in)	5
Depth (in)	2.33
Height (mm)	127
Width (mm)	127
Depth (mm)	59.182
Usable Depth (in)	1.85
Usable Depth (mm)	47

STANDARDS

NEMA 10250; UL 50; UL 50e; UL Listed File #E190960
UL508A

CSA Std. C22.2	File 207025
----------------	-------------

Type	1; 2; 3; 4; 4X; 12; 13
------	------------------------

Temperature Range °F	-4°F to +140°F
----------------------	----------------

Temperature Range °C	-20°C to +60°C
----------------------	----------------

Flammability Rating	UL94-V0
---------------------	---------

Outdoor Exposure UL746c	(f1) Rated
-------------------------	------------