

Enclosures **New Sentry Series**

PVC Enclosure 8 x 8 x 4 Inches New Sentry Series with Opaque Lift Off Cover



**Catalog
Number**

J884PVC

UPC


785928500701

DESCRIPTION

8H x 8W x 4D Inches New Sentry Series PVC Enclosures are corrosion resistant, watertight PVC enclosures featuring simple screw down covers. Each enclosure is assembled with a PVC gasket and a screwdow lift-off cover and 4 captive brass cover screws.

APPLICATION

- Designed for general electrical; electronic applications; and any application that has associated environmental concerns
- Thermoplastic PVC junction enclosure designed for general purpose and industrial applications; including outdoor landscaping; agricultural; marinas; car washes; and residential.
- Well-suited for extremely wet applications and corrosive environments both indoor and outdoor
- Small footprint and extra deep features allow use in tight or dense spaces

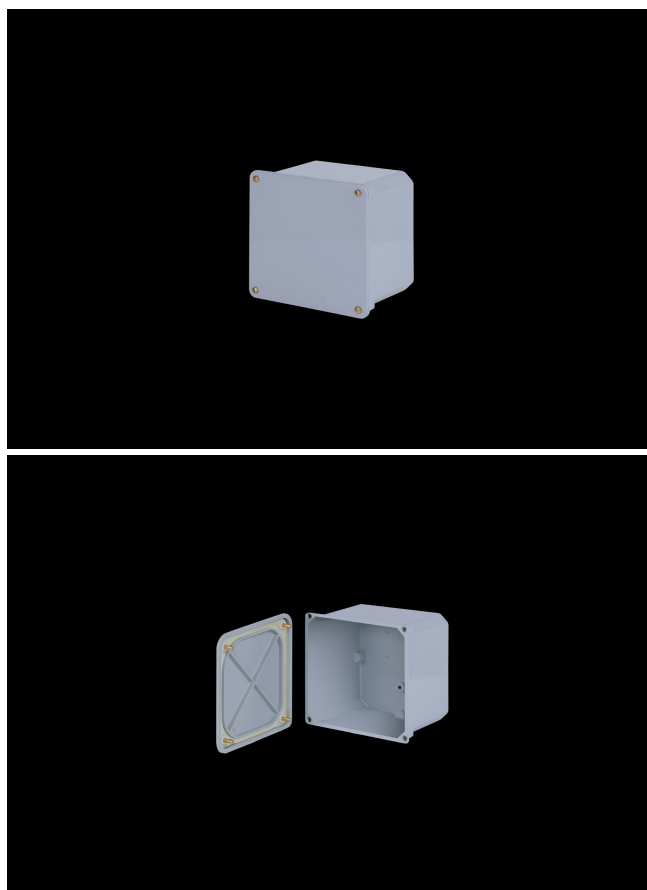

FEATURES

- Corrosion resistant PVC material
- Memory retaining seamless PVC gasket
- Threaded inserts and captive brass cover screws
- Corrosion resistant PVC material
- Integral mounting feet available on some models

General Information

Color	Gray
Cover Type	Opaque
Mounting Type	Wall Mount
Material	PVC
Back Panel Screw Size	
Cover Screw Size	#8-32
Cover Screw Recommended Torque	16-20 in-lbs
Cover Screw Material	Brass
Mounting Foot Screw Size	1/4-15 Hi-Lo
Installation Mounting Torque	40 in-lbs Max
Metal Inserts	Brass
Gasket Material	PVC Seamless
Country of Origin	USA

DIMENSIONS

Height (in)	8.96
Width (in)	8.96
Depth (in)	4.62
Height (mm)	227.584
Width (mm)	227.584
Depth (mm)	117.348
Usable Depth (in)	4.06
Usable Depth (mm)	103

STANDARDS

NEMA 10250; UL 50; UL 50e; UL Listed File #E190960
UL508A

CSA Std. C22.2	File 207025
----------------	-------------

Type	1; 2; 3; 4; 4X; 12; 13
------	------------------------

Temperature Range °F	-4°F to +140°F
----------------------	----------------

Temperature Range °C	-20°C to +60°C
----------------------	----------------

Flammability Rating	UL94-V0
---------------------	---------

Outdoor Exposure UL746c	(f1) Rated
-------------------------	------------