

RC3 SERIES™ POKE-THRU DEVICES



RC3 Series™ Surface Style Poke-Thru Devices provide one (1) 20 Amp power device and four (4) ports of communication.



PEP
eco
PASS
PORT®

Download this product's PEP ecosport, environmental product declaration at www.legrand.us/resources-and-downloads. This declaration conforms with ISO 14025 and 14040 and is in alignment with EN 15804.

CODE REFERENCE

cULus Listed Metallic Outlet Boxes:
File E2961 Guide QCIT.

cULus Listed Nonmetallic Outlet Boxes & Fittings Classified for Fire Resistance:
File R8209 Guide CEYY.

Meets Article 300.21, 300.22(C) & 314 of NEC.




RC3 Series Poke-Thru Device installed in a carpeted floor.

HOLE DIAMETER

Minimum:	4" (102mm)
Maximum:	4 1/8" (105mm)


RC3 Series Poke-Thru Devices
Ordering Information

RC3STC Insert Assembly with Disposable Plate

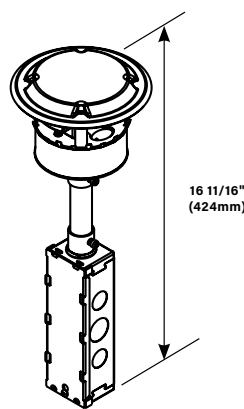

Use with RC3C Series Covers to complete installation.

Abandonment Plate



PART NUMBERS:

RC3APTCBK (Black)

RC3APTCGY (Gray)

Abandonment Plate available in black or gray.

NOTE: To abandon the RC3 Series Poke-Thru Device, the duplex receptacle must be left installed in the unit in order to maintain scrub water compliance. Also the stem must remain in the hole.

COLOR OPTIONS




RC3 Series parts are available in gray "GY", black "BK", brushed aluminum "AL", brass "BS", a brass-colored finish "AB" and an aluminum-colored finish "AA".

Custom color options are also available. Consult the factory for more information.

RC3 SERIES™ POKE-THRU DEVICES

RC3 Series Poke-Thru Devices Ordering Information (continued)

Finish Flange & Slide Holder

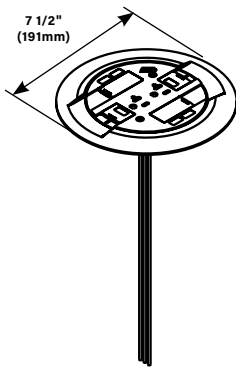

PART NUMBERS:

RC3CTCAA (All Aluminum)
RC3CTCAB (All Brass)
RC3CTCGY (Gray)
RC3CTCBK (Black)
RC3CTCAL (Aluminum)
RC3CTCBS (Brass)

Finish flange and slide holder. Prewired TR 20A duplex receptacle can be wired as standard duplex or isolated ground. Includes Wiremold Open System unloaded adapters to accept four (4) discrete keystone connectors from most manufacturers. Unit also includes two (2) Ortronics TracJack adapters and two (2) Ortronics Series II adapters. Modular Jacks sold separately.

NOTE: Assembled with scrub water gasket. For use on tile or carpet floors.

Assembled Poke-Thru Device

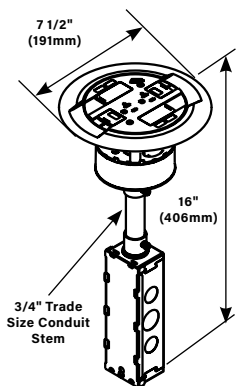
PART NUMBERS:


RC3ATCAA (All Aluminum)
RC3ATCAB (All Brass)
RC3ATCGY (Gray)
RC3ATCBK (Black)
RC3ATCAL (Aluminum)
RC3ATCBS (Brass)

Assembled unit. Prewired TR 20A duplex receptacle can be wired as standard duplex or isolated ground. Includes Wiremold Open System unloaded adapters to accept four (4) discrete keystone connectors from most manufacturers. Unit also includes two (2) Ortronics TracJack adapters and two (2) Ortronics Series II adapters. Modular Jacks sold separately.

NOTE: Assembled with scrub water gasket. For use on tile or carpet floors.

NOTE: RC3 Series poke-thru devices require a 4" (102mm) diameter hole. Not designed to work with bare concrete or terrazzo. Floor covering thickness 1/8" minimum.

Slide Holder



PART NUMBERS:

RC3SHTCGY (Gray)
RC3SHTCBK (Black)
RC3SHTCBS (Brass)
RC3SHTCAA (Aluminum)

Nonmetallic slide holder assembly.

NOTE: Assembled with scrub water gasket. For use on tile or carpet floors.

RC37REC, RC37REC-25 Replacement Receptacles




Prewired snap-in TR 20A receptacle can be wired as standard duplex or isolated ground. Available only in black. See installation instructions with replacement receptacle for complete installation details. The RC37REC-25 is available with 25 foot (7.62m) leads and can be wired as standard duplex or isolated ground.

NOTE: The 20A duplex receptacle supplied with the new scrub water version RC3 Poke-Thru Device is proprietary and can only be replaced with the RC37REC.

NOTE: RC3 Series poke-thru devices require a 4" (102mm) diameter hole. Not designed to work with bare concrete or terrazzo. Floor covering thickness 1/8" minimum.


Poke-Thru Controlled Receptacle


PART NUMBERS:

RC3SHTCBKCR (Black)
RC3SHTCBSCR (Brass)
RC3SHTCGYCR (Gray)
RC3SHTCAACR (Aluminum)


Nonmetallic slide holder assembly with controlled receptacle markings. Markings are located in a recess pad and are permanent, indicating the duplex receptacle below has been wired up to comply with 2014 NEC, CA Title 24 and ASHRAE Energy Efficiency Standard 90.1. Available in Black (BK), Brass (BS), Gray (GY) and Aluminum (AA). Slide holder to be used with the RC3ATC and RC3CTC units.

COM75 Communication Adapter



For two 3/4" trade size conduit connections. No additional capacity with COM75.

ABPLUG4 Abandonment Plug Assembly



Complete plug assembly for abandoning an open 4" (102mm) diameter hole. Assembly includes intumescent fire-stop material to maintain the fire classification of the

floor, integral retainer ring to prevent the unit from pulling up through the floor and a black die-cast aluminum cover.