

AFA and AFAX Conveyor Belt Alignment Switches

Post Style or Large Roller Style.

NEC/CEC — AFAX Series:
Class I, Division 1 and 2, Groups C, D
Class II, Division 1 and 2, Groups E, F, G
Class III
NEMA 7CD, 9EFG

NEC/CEC — AFA Series:
NEMA 3, 4, 4X, 12

Applications

- Emergency stop switch for convey or lines and bulk handling systems which become misaligned or run off their tracks due to excessive speed, uneven load, leveling, breakage or other problems.
- Used where alarm or computer interface capabilities are needed.
- Used in the control circuit of magnetic motor starters to shut down motor driven conveyors in case of abnormal belt misalignment or run-off.
- For installation in:
 - Steel mills
 - Mining (ore and coal) handling operations
 - Automotive and other assembly lines
 - Warehouses
 - Loading docks
 - Other industrial processes.
- AFAX Series is used in Class I and II areas where flammable vapors or highly combustible dusts are present.
- AFA Series has a gasketed cover rated for NEMA 3, 3R, 4, 4X.
- Unit is used in pairs with one switch placed on each side of the conveyor belt. Recommended installation locates switches near the tail and head pulleys on conveyors 91.44 meters (300 feet) and longer.

Features


- AFA10, AFA20, AFAX10, AFAX20:
 - Each unit can be equipped with two micro switches to produce signals indicating belt misalignment at two deviation points.
 - The first signal point could indicate small belt deviations by sounding an alarm.
 - The second signal point could guard against extreme belt runoff by shutting down the conveyor.
 - Operating arm has 247.65 mm (9.75") high and 31.75 mm (1.25") diameter roller and moves 90 degrees in both directions.
 - 3/4" NPT standard conduit opening.
 - Spring loaded arm returns to original position when belt is realigned.
- AFA1, AFA2, AFAX1, AFAX2:
 - Roller is 3.5" high and actuates with 0.25" travel.
 - Unit should be mounted about 1" from belt to eliminate false signals.
 - Operating temperatures are -40 °C to +65 °C (-40 °F to +149 °F).
 - One 1/2" NPT standard, conduit opening.

Standard Materials

- AFA10, AFA20, AFAX10, AFAX20:
 - Housing: cast aluminum
 - Actuating arm contains: red epoxy coated steel roller with stainless steel shaft
 - Hardware: stainless steel
- AFA1, AFA2, AFAX1, AFAX2:
 - Steel coated with enamel paint

Standard Finishes

- Standard enclosure: peened

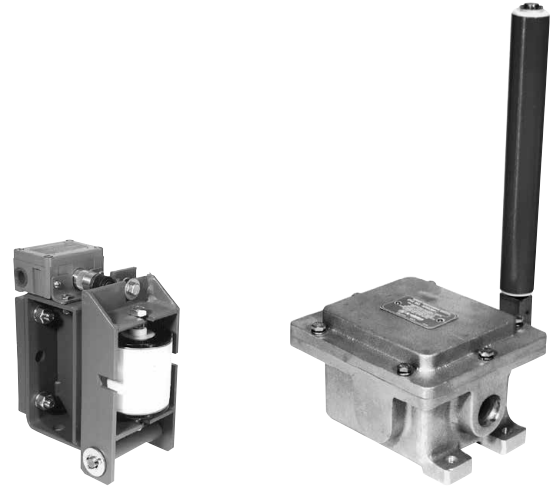

AFA1, AFA2, AFAX1, AFAX2
Large Roller Style

AFA10, AFA20, AFAX10, AFAX20
Post Style (No Accessories)

Options

- Epoxy powder coated switches for AFA10, AFA20, AFAX10 and AFAX20 add suffix **-G1**.
- AFA1, AFA2, AFAX1, AFAX2:
 - Breakaway mounting bracket: **AFABMB**.
 - Breakaway mounting bracket with switch: **AFABMBS**.
 - Breakaway mounting bracket with explosionproof switch: **AFABMBSX**.

NEC/CEC Certifications and Compliances

- UL Standards: UL 508, UL 698
- UL Listed: E10449
- CSA Standards: C22.2 No. 14M, C22.2 No. 25, C22.2 No. 30
- CSA Certified: 700921

CONTROLS: NEC/CEC EXPLOSIONPROOF CONVEYOR SWITCHES

Appleton

AFA and AFAX Conveyor Belt Alignment Switches

Post Style or Large Roller Style.

NEC/CEC — AFAX Series:
Class I, Division 1 and 2, Groups C, D
Class II, Division 1 and 2, Groups E, F, G
Class III
NEMA 7CD, 9EFG

NEC/CEC — AFA Series:
NEMA 3, 4, 4X, 12

CONTROLS: NEC/CEC EXPLOSIONPROOF CONVEYOR SWITCHES




Post Style



Large Roller Style

Classification	Switch Quantity/Description	Switch Rating	Catalog Number
NEMA 3, 4X	1 – sp/dt	1	AFA10
NEMA 3, 4X	2 – sp/dt	1	AFA20
NEMA 7: Class I; Groups C, D	1 – sp/dt	1	AFAX10
NEMA 9: Class II; Groups E, F, G	2 – sp/dt	1	AFAX20
NEMA 3, 4X	1 – sp/dt	1	AFA1
NEMA 3, 4X	1 – dp/dt	2	AFA2
NEMA 7: Class I; Groups C, D	1 – sp/dt	3	AFAX1
NEMA 9: Class II; Groups E, F, G	1 – dp/dt	2	AFAX2

Breakaway Mounting - AFA1, AFA2, AFAX1, AFAX2 Accessories




Designed especially for high speed conveyors. This new feature allows the switch to perform its job of shutting down the system, but automatically moves it out of the way if a high speed belt does run off before stopping. Automatically returns to unactuated position when belt is realigned.

—

—

AFABMB



Use these switches when roller activated micro switch is used as an alarm and then this "extra" switch is used for shut off.

NEMA 1, 3, 4X, 13

1 – sp/dt 10 Amp

Dust and weathertight


AFABMBS

NEMA 7: Class I; Groups C, D
NEMA 9: Class II; Groups E, F, G


1 – sp/dt 10 Amp

Explosionproof

AFABMBSX



Switch Mounting with Breakaway Mount



Typical Application

Switch Electrical Ratings:

1. 20 Amp at 125, 250 or 480 Vac; 1 HP at 125 Vac; 2 HP at 250 Vac; 1/2 Amp at 125 Vdc; 1/4 Amp at 250 Vdc.
2. 10 Amp at 125 or 250 Vac; 0.3 Amp at 125 Vac; 0.15 Amp 250 Vdc.
3. 10 Amp at 125, 250 or 480 Vac; 1/2 Amp at 125 Vdc; 0.15 Amp 250 Vdc.

AFA and AFAX Conveyor Belt Alignment Switch


Post Style or Large Roller Style.

NEC/CEC — AFAX Series:
Class I, Division 1 and 2, Groups C, D
Class II, Division 1 and 2, Groups E, F, G
Class III
NEMA 7CD, 9EFG


NEC/CEC — AFA Series:
NEMA 3, 4, 4X, 12

Dimensions in Millimeters (Inches)


Post Style Roller arm moves 90° in both directions

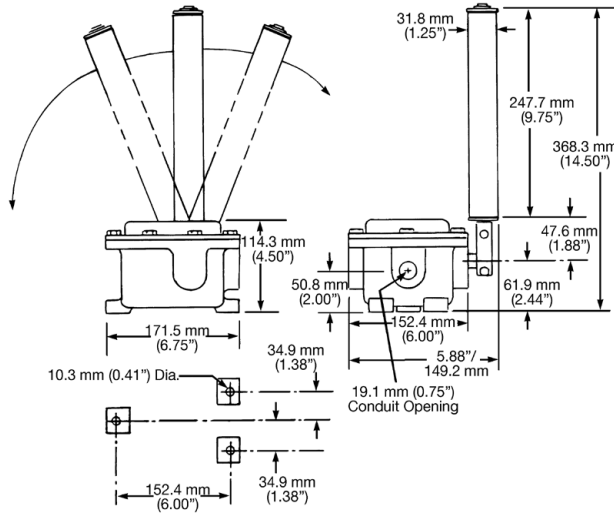

Breakaway Mounting

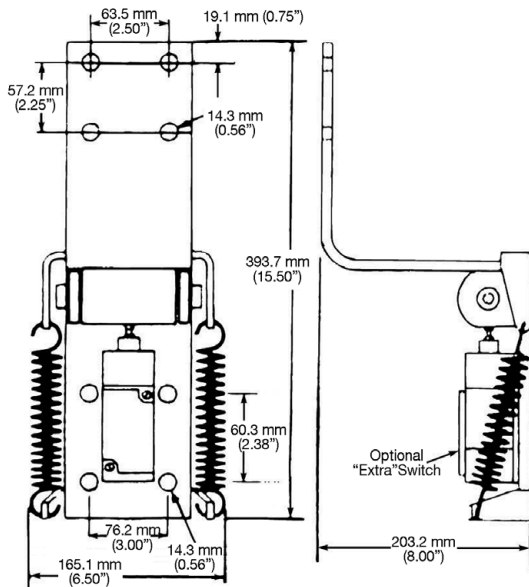


Roller Style

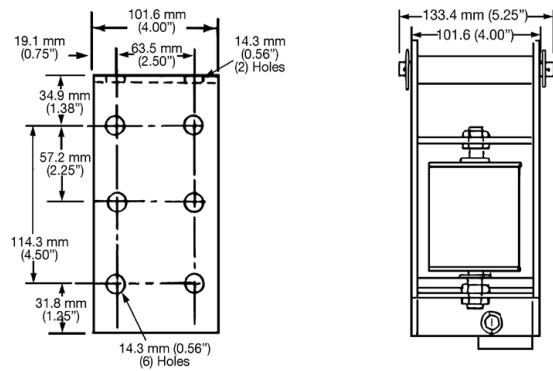


Mounting Pan

Front View

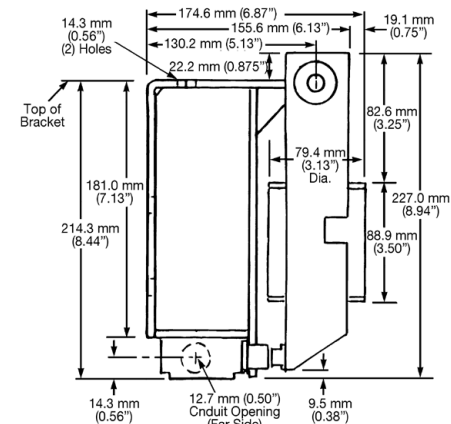

Side View

Support Bracket

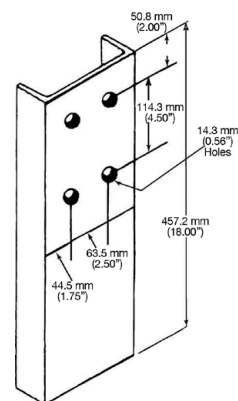

CONTROLS: NEC/CEC EXPLOSION-PROOF CONVEYOR SWITCHES

Appleton