

ATX™ FD Series Cylindrical Fluorescent Luminaires

Standard and Emergency Battery Back-Up. Flameproof

ATEX/IECEX:
Zone 1 and 2 - 21 and 22
Ⓢ II 2 GD
IP66/68

FLUORESCENT/AREA: ATEX/IECEX STANDARD AND EMERGENCY BACK-UP

Applications

- Can be installed in hazardous areas designated as Zone 1 and 2 – 21 and 22.
- For use in locations where a high degree of corrosion resistance is required.
- For indoor/outdoor use where protection against dirt, water and moisture is necessary.
- Typical applications include:
 - Oil refineries
 - Petrochemical facilities
 - Pulp and paper, mills
 - Painting, sewage and water treatment facilities
 - Warehouses
 - Underground tunnels
 - General manufacturing facilities

Features

- Impact resistant borosilicate glass sealed tube.
- Easy access to lamps through gray painted Zamak threaded entry cap.
- Supplied with O-ring for improved ingress protection.
- Corrosion-resistant gray painted Zamak.
- Supplied with energy efficient and self induction ferromagnetic ballast on a removable gear tray.
- Quick and easy installation of fluorescent lighting fixtures with 2G11 and G13 lamp holders.
- Supplied with external and internal ground/earth connection.
- Fixture supplied with one M20 blanking plug.
- Easy connection to wire and disconnect with plug-in terminal blocks.
- Bi-pin (G13) 18 and 36 W magnetic ballast versions operate at 70 °C (158°F) ambient temperature with T4 rating.
- Magnetic ballast versions 230 V 50 Hz or 240 V 50 Hz or 220 V 60 Hz or 230 V 60 Hz.
- Electronic ballast versions 110 to 254 Vac/Vdc, 50/60 Hz.
- 3 hour emergency version with automatic self test every month
- Plug in battery pack (6 V 4 Ah) is easy to remove for maintenance.

Standard Materials

- End caps and cover: aluminum
- Glass tube: tempered borosilicate glass (18 W), or borosilicate glass (36 W and 58 W)
- Internal reflector: white powder coated galvanized steel
- Mounting accessories: several accessories in different material such as zinc plated steel, galvanized steel or 316 stainless steel

Options

- 3 lamp versions.
- 8 W fluorescent (Bi-pin G5) available, see section HBDC series.



2 x 58 W



2 x 36 W



2 x 18 W

ATEX/IECEX Certifications and Compliances

- Certification Type: FLd
 - Gas: Zone 1 and 2:
 - Conforming to ATEX 94/9/CE: Ⓢ II 2 G
 - Type of Protection: Ex d IIB, Ex d IIB+H₂, Ex d IIC
 - T-Rating: See Table on following page
 - Dust: Zone 21 and 22:
 - Conforming to ATEX 94/9/CE: Ⓢ II 2 D
 - Type of Protection: Ex tD A21
 - Surface Temperature: See Table on following page
- Ambient Temperature: -20 °C to +55 °C (-4 °F to +131 °F)
- CE Declaration of Conformity: 50203
- ATEX Certificate: LCIE 97 ATEX 6012
- IECEx Certificate: IECEx LCI 04.0018
- Index of Protection according EN/IEC 60529: IP66/68
- Impact Resistance (shock): IK08
- Internal Volume: > 2 dm³ (122 in³) - 2 liters

EURASEC Certification

- EURASEC N° TC RU C-FR.ГБ05.B.00910

Other Certification

- INMETRO Certificate: BVC11.0492 ①

Related Products

- For labels see *Labels for Emergency Lighting Units*, *ATX Self-Adhesive Signaling Labels for Emergency Lighting Units*.

① Inmetro certification available on special request only. Contact your local sales representative for more information.


ATX™ FD Series Cylindrical Fluorescent Luminaires

Standard and Emergency Battery Back-Up. Flameproof

ATEX/IECEX:
Zone 1 and 2 - 21 and 22
II 2 GD
IP66/68

Order using catalog numbering guide below or select catalog number from tables on following pages.

Catalog Numbering Guide – FD Series Cylindrical Fluorescent Luminaires

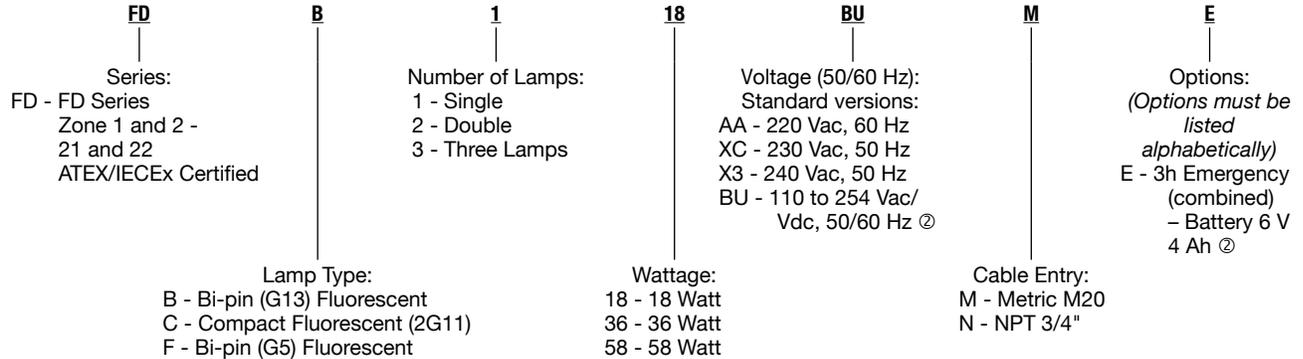

FDB218ACM

FDB218BUN

T Rating (Gas) and Surface Temperature (Dust) Table

Model	Lamp Type	Gas – T Rating					Dust – Surface Temperature	
		Without External Reflector			With External Reflector		Without External Reflector	With External Reflector
		Ta = 40 °C (104 °F)	Ta = 55 °C (131 °F)	Ta = 70 °C (158 °F)	Ta = 40 °C (104 °F)	Ta = 55 °C (131 °F)		
0.3	Compact Fluorescent 2G11 18 W max.	T6	T5	N.A.	T5	T4	95 °C (203 °F)	130 °C (266 °F)
	a) Fluorescent G13 Magnetic Ballast 1 x 18 W/2 x 18 W	T6	T5	T4	T6	T5	97 °C (207 °F)	95 °C (203 °F)
0.6	b) Fluorescent G13 Electronic Ballast 1 x 18 W/2 x 18 W/3 x 18 W	T6	T6	N.A.	T6	T5	78 °C (172 °F)	95 °C (203 °F)
	c) Compact Fluorescent 2G11 1 x 36 W 2 x 36 W	T6	T5	N.A.	T6 T5	T4	95 °C (203 °F)	130 °C (266 °F)
1.2	a) Fluorescent G13 Magnetic Ballast 1 x 36 W/2 x 36 W/3 x 36 W	T6	T5	T4	T6	T5	110 °C (230 °F)	95 °C (203 °F)
	b) Fluorescent G13 Electronic Ballast 1 x 36 W/2 x 36 W/3 x 36 W	T6	T6	N.A.	T6	T6	78 °C (172 °F)	80 °C (176 °F)
1.5	a) Fluorescent G13 Magnetic Ballast 1 x 58 W/2 x 58 W	T6	T6	N.A.	T6	T5	80 °C (176 °F)	95 °C (203 °F)
	b) Fluorescent G13 Electronic Ballast 1 x 58 W/2 x 58 W/3 x 58 W	T6	T5	N.A.	T6	T5	84 °C (183 °F)	95 °C (203 °F)

② The 3 hour emergency version is only available on fluorescent, 2 lamp fixtures with BU voltage - 110 to 254 Vac/Vdc, 50/60 Hz.

ATX™ FD Series Cylindrical Fluorescent Luminaires


Standard and Emergency Battery Back-Up. Flameproof

ATEX/IECEX:
 Zone 1 and 2 - 21 and 22
 II 2 GD
 IP66/68

FLUORESCENT/AREA: ATEX/IECEX STANDARD AND EMERGENCY BACK-UP

Ordering Information – Standard Versions

Two M20 threaded entries, supplied with one M20 aluminum blanking plug.
 Connection via 1 x 3 double deck terminals.
 Capacity (flexible/solid): 0.75 mm² to 2.5 mm² (0.001 in² to 0.004 in²).



For Bi-pin (G13) Fluorescent Lamps - T8, 26 mm (1.02 in) or T12, 38 mm (1.50 in)
 230 V - 50 Hz – Magnetic Ballast – Starter Ignition
 Compensated power supply – power factor > 0.9

Wattage (W)	No. of Lamps	Gas Group	Model	Weight kg (lb)	Volume dm ³ (in ³)	Catalog Number
18	1	IIC	0.6	9.0 (19.8)	58 (3539.38)	FDB118XCM
	2	IIC	0.6	9.7 (21.38)	58 (3539.38)	FDB218XCM
36	1	IIB+H ₂	1.2	14.7 (32.41)	99 (6041.35)	FDB136XCM
	2	IIB+H ₂	1.2	15.3 (33.73)	99 (6041.35)	FDB236XCM
58	1	IIB	1.5	17.0 (37.48)	119 (7261.83)	FDB158XCM
	2	IIB	1.5	18.2 (40.12)	119 (7261.83)	FDB258XCM

240 V - 50 Hz – Magnetic Ballast – Starter Ignition

Compensated power supply – power factor > 0.9

18	1	IIC	0.6	9.0 (19.8)	58 (3539.38)	FDB118X3M
	2	IIC	0.6	9.7 (21.38)	58 (3539.38)	FDB218X3M
36	1	IIB+H ₂	1.2	14.7 (32.41)	99 (6041.35)	FDB136X3M
	2	IIB+H ₂	1.2	15.3 (33.73)	99 (6041.35)	FDB236X3M
58	1	IIB	1.5	17.0 (37.48)	119 (7261.83)	FDB158X3M
	2	IIB	1.5	18.2 (40.12)	119 (7261.83)	FDB258X3M

220 V - 60 Hz – Magnetic Ballast – Starter Ignition

Compensated power supply – power factor > 0.9

18	2	IIC	0.6	9.7 (21.38)	58 (3539.38)	FDB218AAM
36	2	IIB+H ₂	1.2	15.3 (33.73)	99 (6041.35)	FDB236AAM
58	2	IIB	1.5	18.2 (40.12)	119 (7261.83)	FDB258AAM

Appleton®


ATX™ FD Series Cylindrical Fluorescent Luminaires

Standard and Emergency Battery Back-Up. Flameproof

ATEX/IECEX:
 Zone 1 and 2 - 21 and 22
 II 2 GD
 IP66/68

Ordering Information – Standard Versions – Continued

Two M20 threaded entries, supplied with one M20 aluminum blanking plug.
 Connection via 1 x 3 double deck terminals.
 Capacity (flexible/solid): 0.75 mm² to 2.5 mm² (0.001 in² to 0.004 in²).



For Bi-pin (G13) Fluorescent Lamps - T8, 26 mm (1.02 in) or T12, 38 mm (1.50 in)
 110 to 254 Vac/Vdc, 50/60 Hz – Electronic Ballast
 Power factor > 0.95


Wattage (W)	No. of Lamps	Gas Group	Model	Weight kg (lb)	Volume dm ³ (in ³)	Catalog Number
18	2	IIC	0.6	9.7 (21.38)	58 (3539.38)	FDB218BUM
36	2	IIB	1.2	15.3 (33.73)	99 (6041.35)	FDB236BUM
	3	IIB	1.2	16.3 (35.94)	99 (6041.35)	FDB336BUM
	1	IIB	1.5	17.0 (37.48)	119 (7261.83)	FDB158BUM
58	2	IIB	1.5	18.2 (40.12)	119 (7261.83)	FDB258BUM
	3	IIB	1.5	19.2 (42.33)	119 (7261.83)	FDB358BUM

For 2G11 Compact Fluorescent Lamps – TC-L
 230 V - 50 Hz – Magnetic Ballast – Starter Ignition
 Compensated power supply – power factor > 0.9 – Lamps supplied

18	1	IIC	0.3	9.0 (19.8)	58 (3539.38)	FDC118XCM
	2	IIC	0.3	9.7 (21.38)	58 (3539.38)	FDC218XCM
36	1	IIB+H ₂	0.6	14.7 (32.41)	99 (6041.35)	FDC136XCM
	2	IIB+H ₂	0.6	15.3 (33.73)	99 (6041.35)	FDC236XCM

Emergency Versions

Two M20 threaded entries, supplied with one M20 aluminum blanking plug.
 Connection via 1 x 4 double deck terminals.
 Capacity (flexible/solid): 0.75 mm² to 2.5 mm² (0.001 in² to 0.004 in²).



For Bi-pin (G13) Fluorescent Lamps – T8, 26 mm (1.02 in) or T12, 38 mm (1.50 in)
 110 to 254 Vac/Vdc, 50/60 Hz – Electronic Ballast
 3 hour duration - battery pack 6 V 4 Ah - Power factor > 0.95 -
 Self test every month.

Wattage (W)	No. of Lamps	Gas Group	Model	Line Output	Weight kg (lb)	Volume dm ³ (in ³)	Catalog Number
18	2	IIC	0.6	29%	11.6 (25.57)	58 (3539.38)	FDB218BUME
36	2	IIB	1.2	16%	17.2 (37.92)	99 (6041.35)	FDB236BUME
58	2	IIB	1.5	11%	20.2 (44.53)	119 (7261.83)	FDB258BUME



ATX™ FD Series Cylindrical Fluorescent Luminaires

Standard and Emergency Battery Back-Up. Flameproof

ATEX/IECEX:
 Zone 1 and 2 - 21 and 22
 II 2 GD
 IP66/68

FLUORESCENT/AREA: ATEX/IECEX STANDARD AND EMERGENCY BACK-UP

Accessories and Replacement Parts


	Description	Catalog Number
External Reflector – White Painted Galvanized Steel		
	Model 0.3	FDER1G
	Model 0.6	FDER2G
	Model 1.2	FDER3G
	Model 1.5	FDER4G
Protective Guard – Zinc Plated Steel		
	Model 0.3	FDPG1Z
	Model 0.6	FDPG2Z
	Model 1.2	FDPG3Z
	Model 1.5	FDPG4Z
Fixing Brackets for Ease of Surface Installation – Set of Two		
	Zinc plated steel	FDFBZ
	316 stainless steel	FDFBS
Surface Mounting Brackets – Set of Two		
	Zinc plated steel	FDSBZ
	316 stainless steel	FDSBS
Half Clamp Brackets for Pole Mounting – Set of Two		
	Pole diameter 42 to 49 mm (1.65 to 1.93 in) Tube diameter 31.8 to 38.1 mm (1.25 to 1.5 in)	
	Zinc plated steel	FDHC49Z
	316 stainless steel	FDHC49S
	Pole diameter 60 mm (2.36 in) Tube diameter 50.8 mm (2 in)	
	Zinc plated steel	FDHC60Z
	316 stainless steel	FDHC60S
Fall Prevention Kit		
	1.20 meter (3.94 foot) stainless steel chain	FDSCS

ATX™ FD Series Cylindrical Fluorescent Luminaires

Standard and Emergency Battery Back-Up. Flameproof

ATEX/IECEX:
 Zone 1 and 2 - 21 and 22
 II 2 GD
 IP66/68

Wiring Diagram

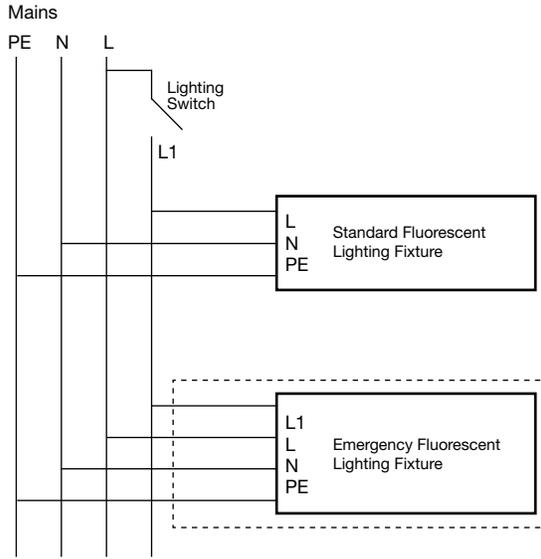

Emergency Function Diagram


Two Lamp Version

Mains	Lighting Switch ON	Lighting Switch OFF
ON		
OFF		

LED Status

Color	Indication	Function
Green	Blinking 1:1	Mains good, battery quick charging
	ON	Mains good, battery trickle charging
Red	Blinking 1:1	No battery connected or something is defective
	Flashing 1:1	Mains faulty, battery empty or lamp defective
	ON	Mains faulty, output ON
Yellow	OFF	No mains, battery completely empty
	Blinking 1:1	Mains good, performing self test
	ON	Result of self test was not good

Dimensions in Millimeters (Inches)

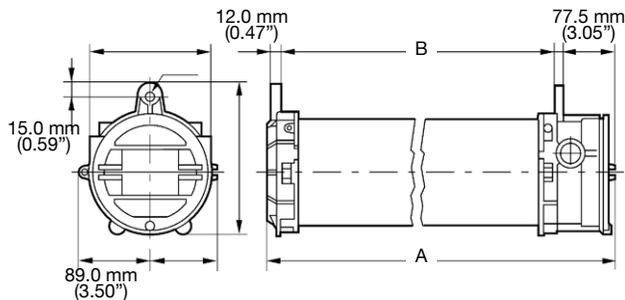

Model	A	B
0.3	430 (16.93)	335 (13.19)
0.6	745 (29.33)	650 (25.59)
1.2	1365 (53.74)	1260 (49.61)
1.5	1655 (65.16)	1560 (61.42)

ATX™ FD Series Cylindrical Fluorescent Luminaires

Standard and Emergency Battery Back-Up. Flameproof

ATEX/IECEX:
Zone 1 and 2 - 21 and 22
II 2 GD
IP66/68

FLUORESCENT/AREA: ATEX/IECEX STANDARD AND EMERGENCY BACK-UP

Photometric Data

Polar curves for a 1000 lm flux, according to NF C 71-120
Luminaire symbol according to NF C 71-121

--- Longitudinal
— Transverse

Bi-pin (G13) Fluorescent





2G11 Compact Fluorescent

1 x 18 W
Efficiency 75.3%
NF C 71-121/0: 0.69 H + 0.06 T

2 x 18 W
Efficiency 68.1%
NF C 71-121: 0.63 G + 0.06 T

3 x 18 W
Efficiency 57%
NF C 71-121: 0.50 G + 0.07 T

2 x 18 W
Efficiency 56.2%
NF C 71-121: 0.52 G + 0.04 T

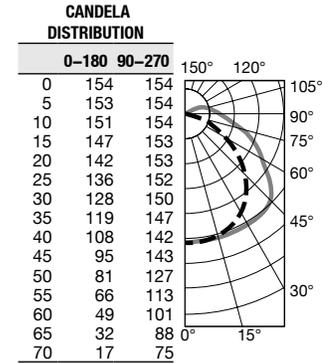
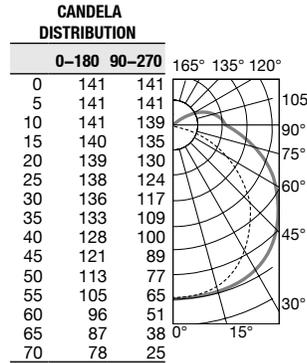
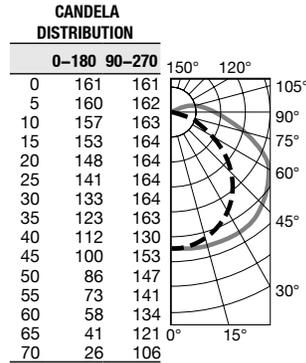
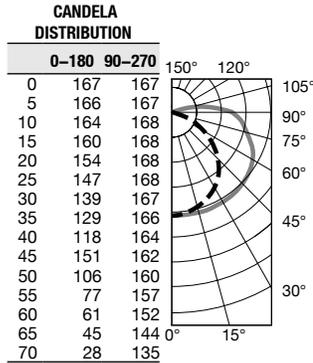


1 x 36 W
Efficiency 74.3%
NF C 71-121/0: 0.69 H + 0.05 T

2 x 36 W
Efficiency 61.5%
NF C 71-121: 0.57 G + 0.04 T

3 x 36 W
Efficiency 53.3%
NF C 71-121: 0.47 G + 0.06 T

2 x 36 W
Efficiency 53.6%
NF C 71-121: 0.50 G + 0.04 T

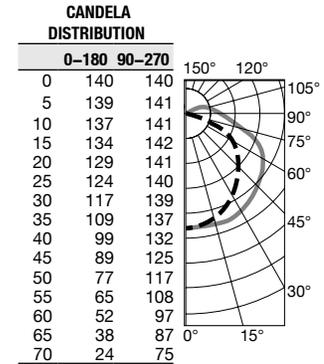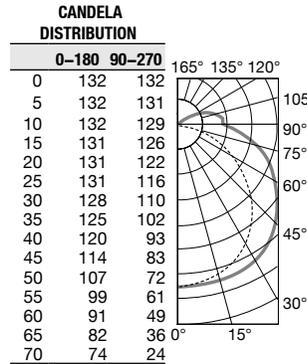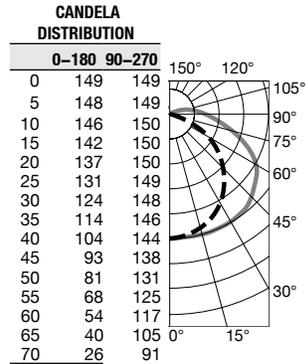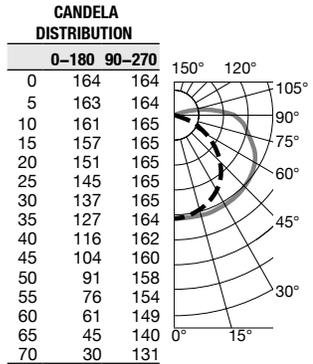

1 x 58 W
Efficiency 74.5%
NF C 71-121/0: 0.70 H + 0.05 T

2 x 36 W
Efficiency 61.5%
NF C 71-121: 0.57 G + 0.04 T

3 x 36 W
Efficiency 53.3%
NF C 71-121: 0.47 G + 0.06 T

