

**BALDOR® • RELIANCE™**

---

# Customer information packet

## CDPWD3306

.25HP, 1750RPM, DC, 56C, 3320P, TENV, F1

## Specifications

Armature Voltage	180 V
Base Speed	1750 rpm
Enclosure	TENV
Frame	56C
Frame Material	Steel
Output Power	0.250 HP
Agency Approvals	CE CSA UR
Ambient Temperature	40 °C
Armature Current	1.3 a
Armature Inertia	4.680 lb-ft <sup>2</sup>
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Drip Cover	No Drip Cover
Duty Rating	CONT
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
Lifting Lugs	No Lifting Lugs
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	2 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Mounting Arrangement	F1
Overall Length	12.25 IN
Product Family	Wash Down
Pulley End Bearing Type	Sealed Bearing
Service Factor	1.00
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible

## Part detail

Revision	AK
Type	DC
Mech. spec.	33-2154
Base	
Status	PRD/A
Elec. spec.	33WGZ132
Layout	33LY2154
Eff. date	08-20-2024
CD Diagram	CD0194
Poles	00
Leads	
Proprietary	False
Created date	01-01-0001

**Shaft Slinger Indicator**

**Shaft Slinger**

---

**Nameplate**

<b>NP1509</b>					
<b>CAT.NO.</b>	CDPWD3306				
<b>SPEC.</b>	33-2154Z132				
<b>HP</b>	.25	<b>ENCL</b>	TENV		
<b>RPM</b>	1750 1/MIN IC410				
<b>FRAME</b>	56C	<b>TYPE</b>	3320P		
<b>ARM V</b>	180	<b>ARM A</b>	1.25		
<b>FLD V</b>	<b>FLD A</b>				
<b>INSUL</b>	F	<b>AMB.</b>	40		
<b>DUTY</b>	CONT	<b>SUPPLY</b>	1.3		
<b>BRG/DE</b>	6203	<b>BRG/ODE</b>	6203		
<b>BRUSHES</b>	2/BP5011CV01				
	IP55	<b>BLANK</b>			
<b>SER.</b>					
<b>BLANK</b>	KW.18 KG10				
<b>APRV-CSA</b>	Y	<b>APRV-UL</b>	Y	<b>APRV-CE</b>	Y

**DC Motor Performance Data**

Record # 2012

Typical performance - not guaranteed values

<b>Winding: 33WGZ132-R006</b>		<b>Type: 3320P</b>	<b>Enclosure: TENV</b>	
<b>Nameplate Data</b>		<b>General Characteristics</b>		
<b>Rated Output (HP)</b>	0.25	<b>Armature Resistance @ 25°C</b>	8.54 Ω	
<b>R.P.M.</b>	1750	<b>Voltage Constant</b>	98.01 v/krpm	
<b>Armature Volts</b>	180	<b>Armature Inductance</b>	60.59301 mH	
<b>Armature Amps</b>	1.25	<b>Armature Inertia</b>	4.68 LI <sup>2</sup>	
<b>Field Volts</b>				
<b>Field Amps</b>				
<b>Rating - Duty</b>	40C AMB-CONT			
<b>Form Factor</b>	1.3			

**Load Characteristics at 180 Armature Volts**

<b>Load Point</b>	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>
<b>Armature Amps</b>	0.1	0.35	0.61	0.87	1.15	1.43	1.68
<b>R.P.M.</b>	1830	1821	1779	1750	1720	1690	1673
<b>Torque ( LB-FT )</b>	0	0.193	0.387	0.559	0.752	0.945	1.117


ABB Motors and Mechanical Inc.

WINDING # 33WGZ132


0.25 HP DC 1750 RPM 180 V 3320P

Typical performance - not guaranteed values.


ENCL: TENV DUTY: CONT CL: F

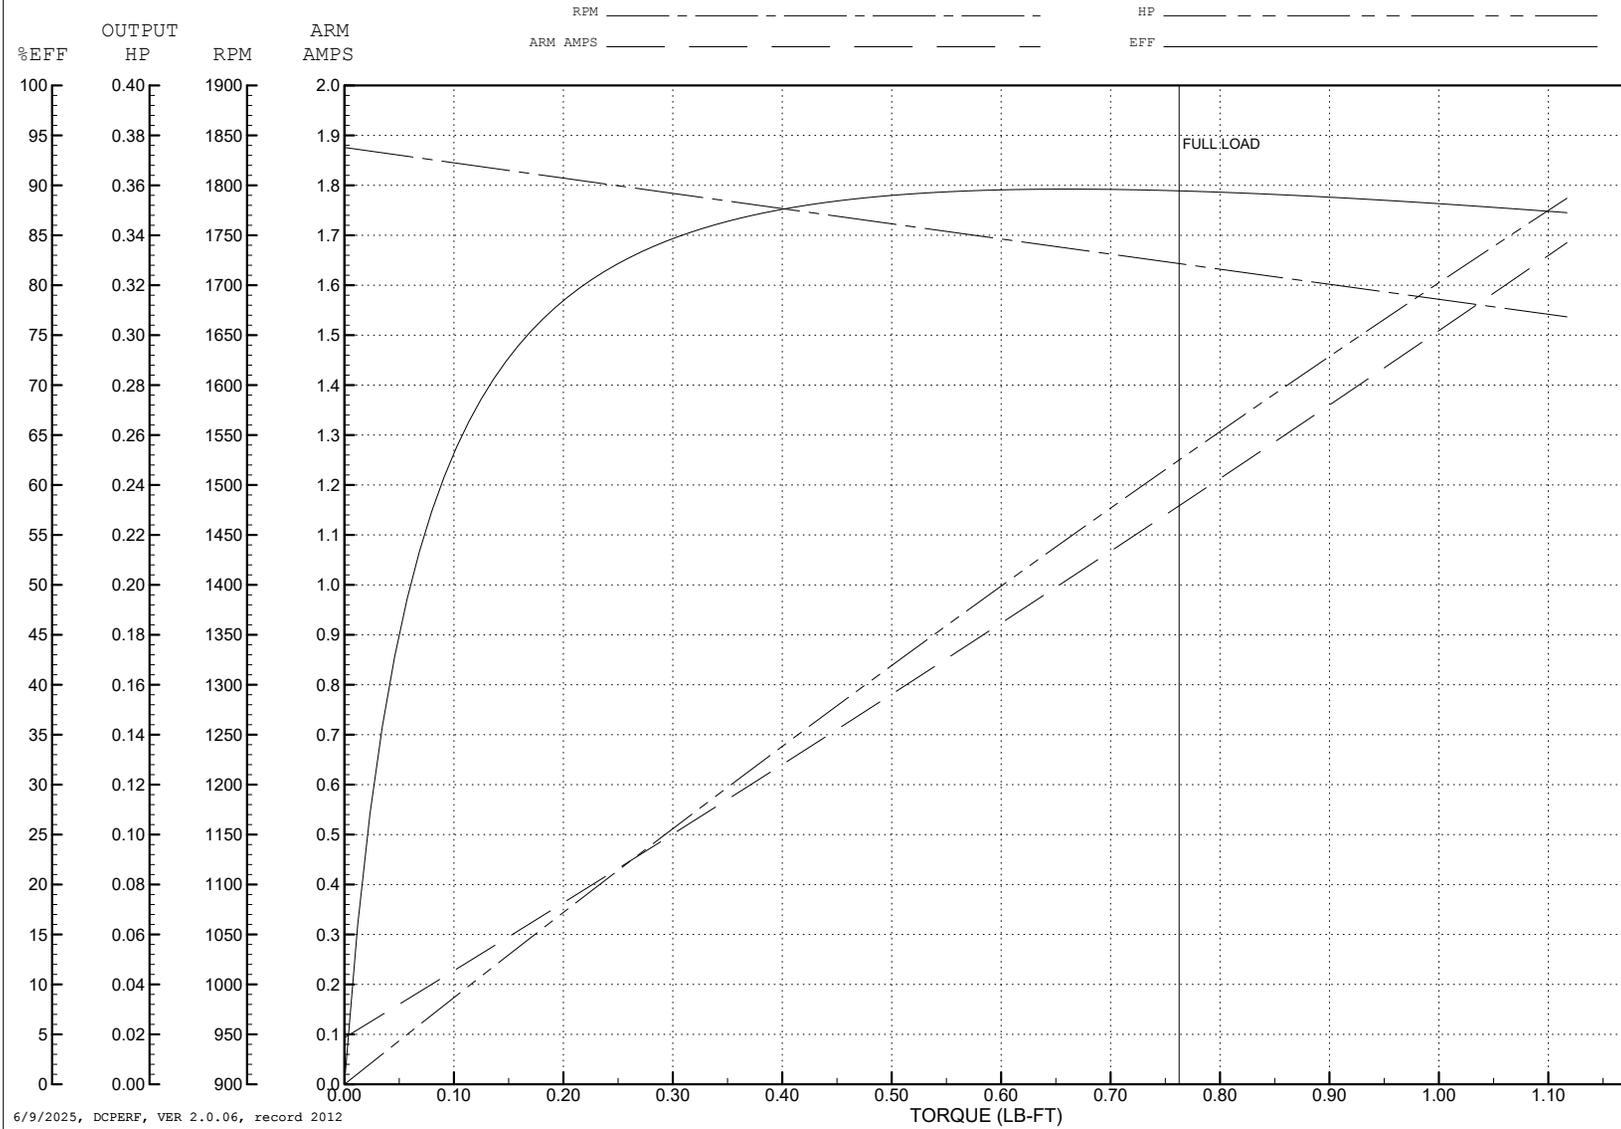

6/9/2025, DCPERF, VER 2.0.06, record 2012

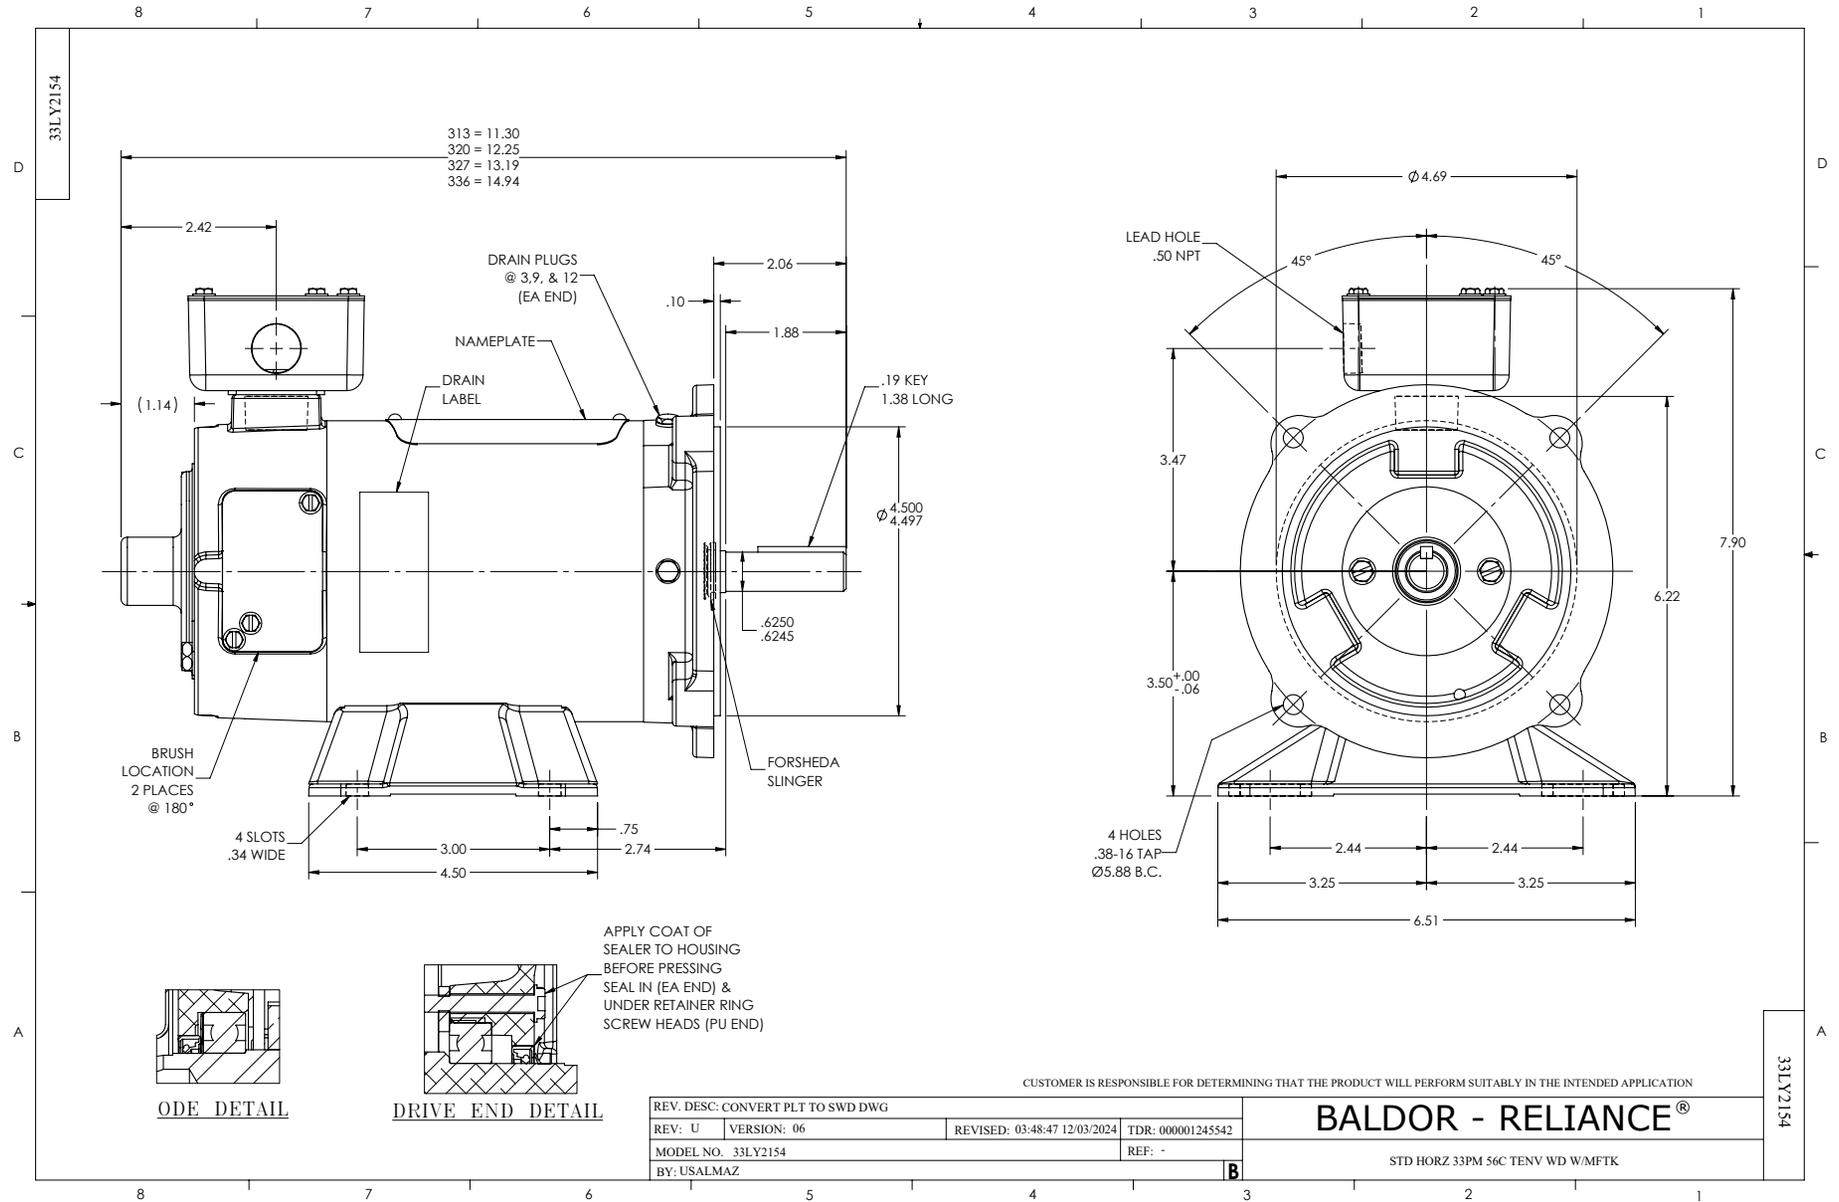

CD0194

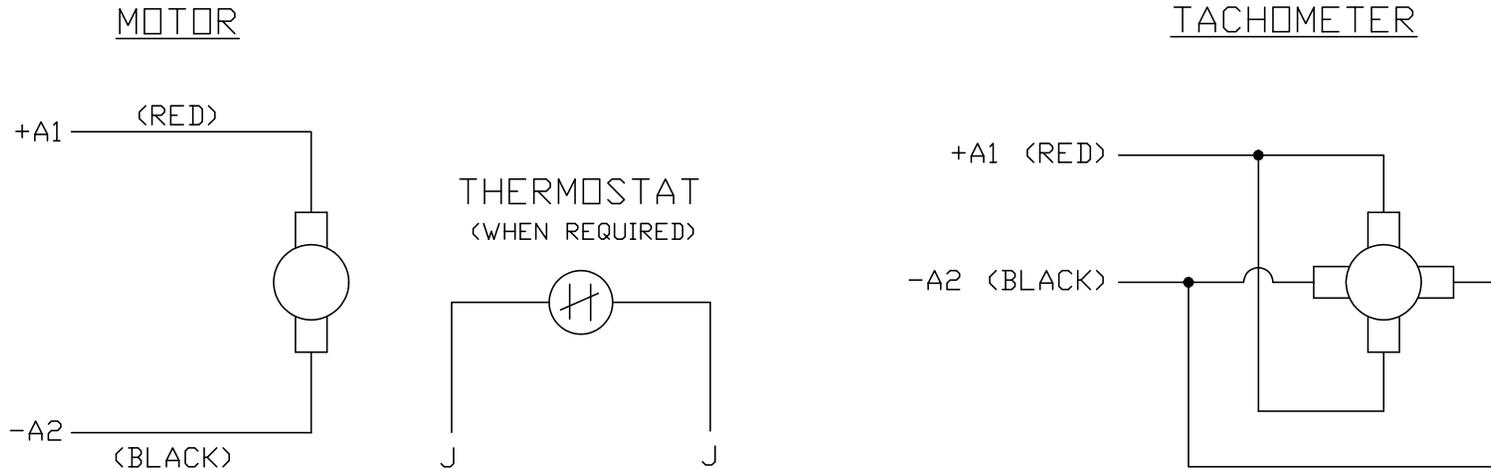

NOTES:

1. CCW ROTATION AS SHOWN FACING COMMUTATOR END. TO REVERSE MOTOR ROTATION OR TACHOMETER OUTPUT POLARITY INTERCHANGE LEADS A1(RED) & A2(BLACK)
2. LEAD COLORS FOR REFERENCE ONLY & NOT SPECIFIED BY THIS DRAWING. LEAD COLORS SPECIFIED BY LAYOUT DRAWING & BILL OF MATERIAL ONLY.

MATL: -			
REV: E	ADDED NOTE "LEAD COLORS FOR REFERENCE ONLY &..."		
761000 CD0194	SCALE: -	BY: CK	REVISED: 07/28/95
	FILE: AAA00004503	TDR: 0078737	

**BALDOR ELECTRIC Co.**

CD TYPE P DC PERMANENT MAGNET MOTORS AND TACHOMETERS

CD0194