



---

# Customer information packet

## CNM3531

.25HP, 1160RPM, 3PH, 60HZ, 56C, 3518M, TENV, F1

Class - None

Division - Not Applicable

## Specifications

Enclosure	TENV
Frame	56C
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.250 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	208.0 V @ 60 HZ 230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	1.600 A @ 230.0 V 1.600 A @ 208.0 V .800 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	72.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater

## Part detail

Revision	B
Type	AC
Mech. spec.	35E012
Base	
Status	PRD/A
Elec. spec.	35WGG156
Layout	35LYE012
Eff. date	05-07-2024
CD Diagram	CD0005
Poles	06
Leads	9#18
Proprietary	False
Created date	02-23-2023

High Voltage Full Load Amps	0.8 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3518M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	11.06 IN
Power Factor	60
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1160 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

**Nameplate**

<b>NP1256L</b>									
<b>CAT.NO.</b>	CNM3531								
<b>SPEC.</b>	35E012G156G3								
<b>HP</b>	.25								
<b>VOLTS</b>	208-230/460								
<b>AMP</b>	1.6/.8								
<b>RPM</b>	1160								
<b>FRAME</b>	56C		<b>HZ</b>	60		<b>PH</b>	3		
<b>SER.F.</b>	1.15	<b>CODE</b>	L	<b>DES</b>	B	<b>CLASS</b>	F		
<b>NEMA-NOM-EFF</b>	72	<b>PF</b>	60						
<b>RATING</b>	40C AMB-CONT								
<b>CC</b>									
<b>DE</b>	6205		<b>ODE</b>	6203					
<b>ENCL</b>	TENV	<b>SN</b>							
	SFA 1.7/.85								

**AC Induction Motor Performance Data**

Record # 87763

Preliminary Data Sheet

Winding: 35WGG156-R003		Type: 3518M	Enclosure: TENV	
<b>Nameplate Data</b>			<b>460 V, 60 Hz: High Voltage Connection</b>	
Rated Output (HP)	.25	Full Load Torque	1.1 LB-FT	
Volts	208-230/460	Start Configuration	direct on line	
Full Load Amps	1.6/.8	Breakdown Torque	8.98 LB-FT	
R.P.M.	1160	Pull-up Torque	3.07 LB-FT	
Hz	60 Phase	3	Locked-rotor Torque	5.36 LB-FT
NEMA Design Code	B KVA Code	L	Starting Current	5.97 A
Service Factor (S.F.)	1.15	No-load Current	0.742 A	
NEMA Nom. Eff.	72 Power Factor	60	Line-line Res. @ 25°C	39.9 Ω
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	20°C	
S.F. Amps	1.7/.85	Temp. Rise @ S.F. Load	21°C	
		Locked-rotor Power Factor	56.4	
		Rotor inertia	0.131 lb-ft <sup>2</sup>	

**Load Characteristics 460 V, 60 Hz, 0.25 HP**

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	18	26	33	39	45	51	43
Efficiency	44.3	60.3	68.2	72.2	74.9	77	73.8
Speed	1197	1194	1191	1188	1185	1182	1186
Line amperes	0.743	0.762	0.787	0.819	0.859	0.894	0.843


ABB Motors and Mechanical Inc.

WINDING # 35WGG156


0.25 HP 3 PH 60 HZ 1160 RPM 460 V 3518M

Typical performance - not guaranteed values.


TORQUES (LB-FT): PO=8.98 PU=3.07 LR=5.36 LRA=5.97

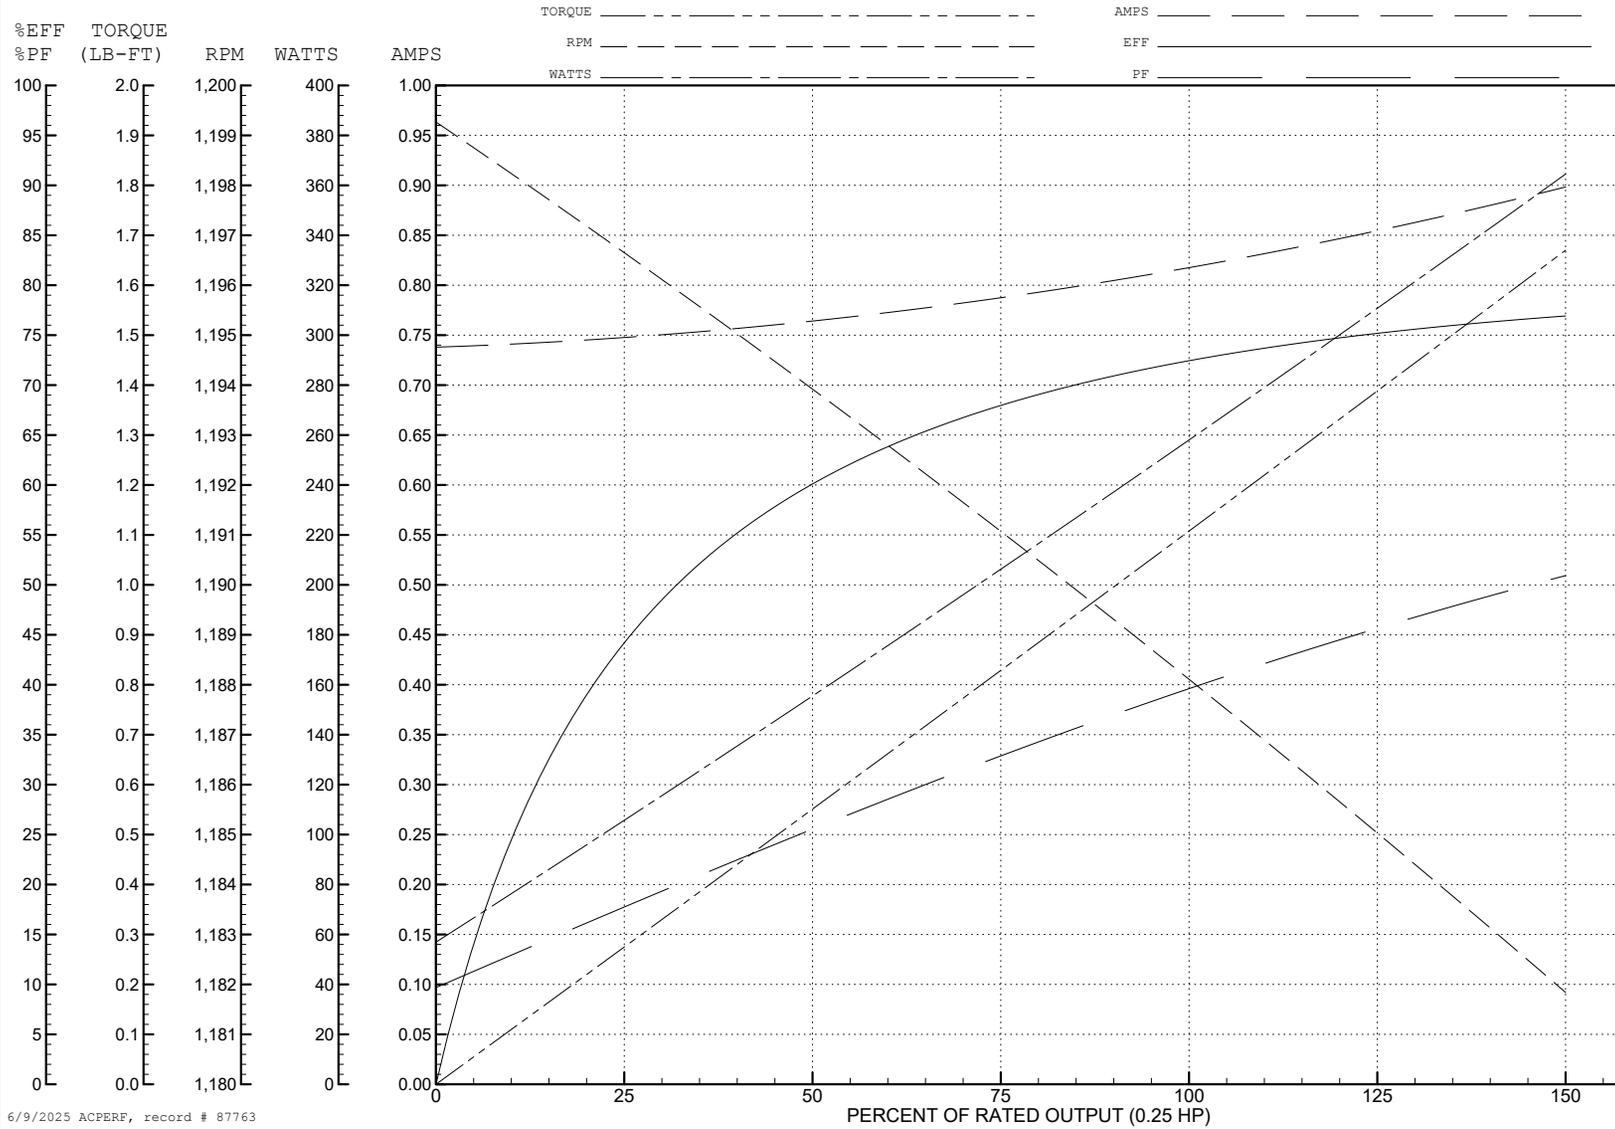


6/9/2025 ACPERF, record # 87763

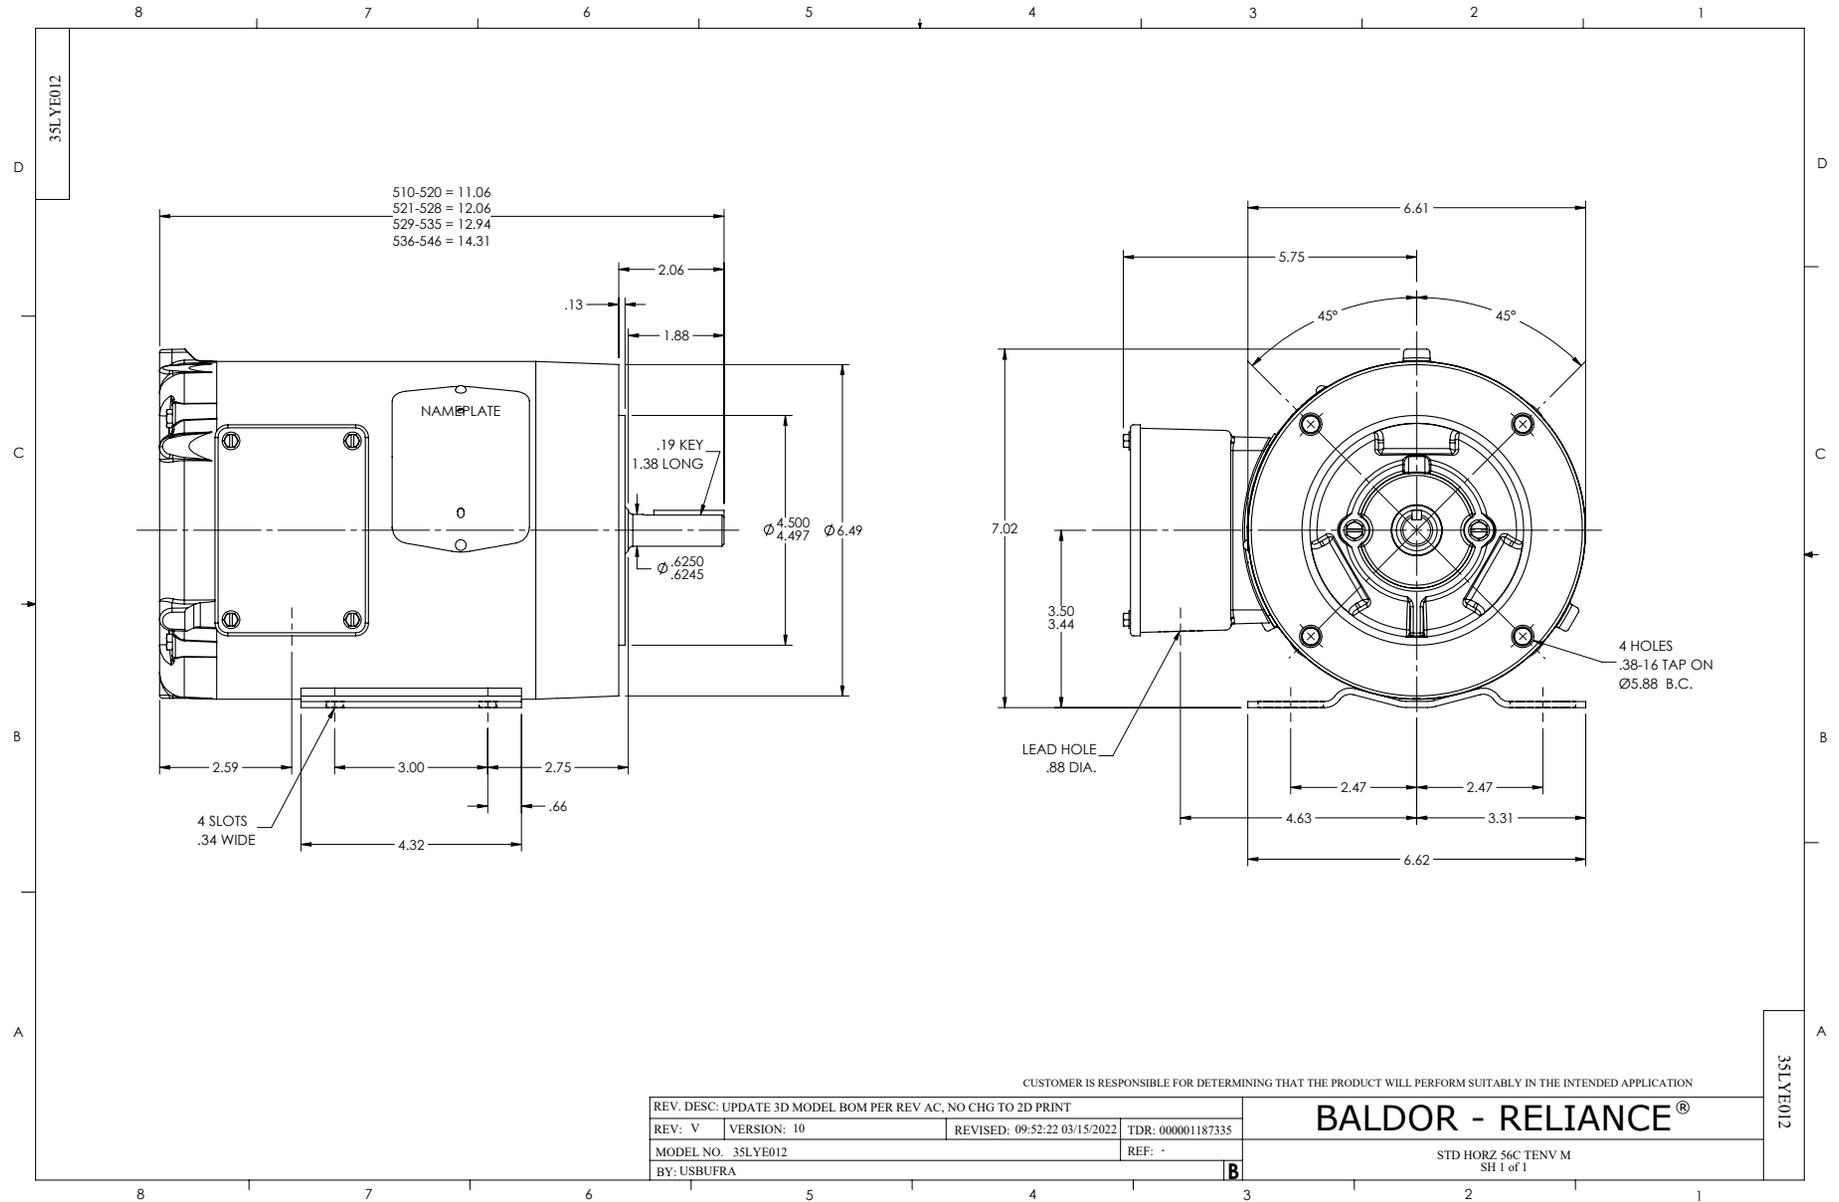

CD0005

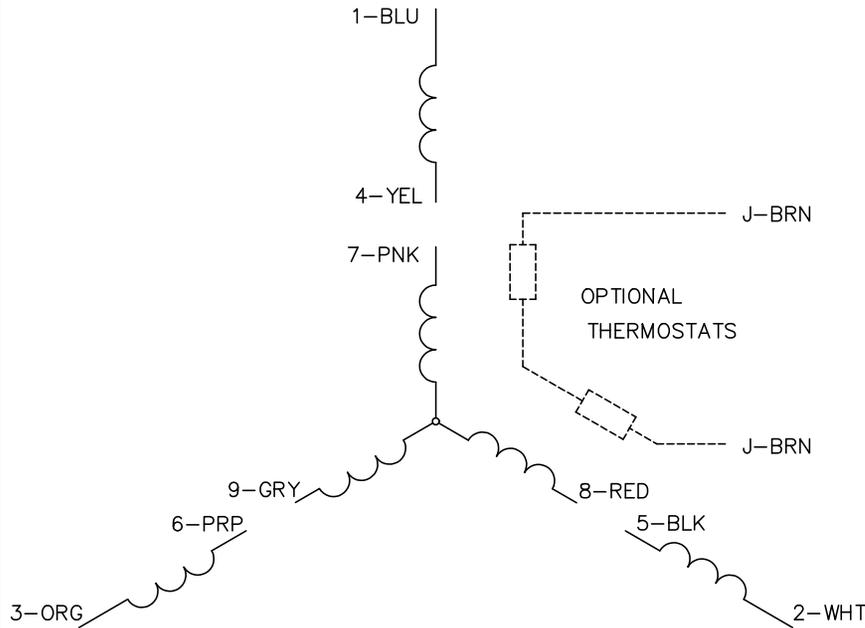


LOW VOLTAGE (2Y)

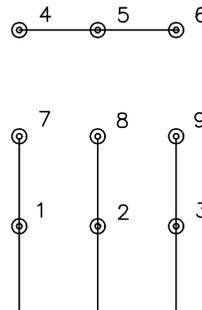

LINE

HIGH VOLTAGE (1Y)

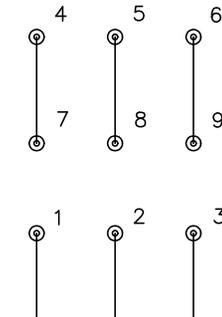

LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
S00000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS