

BALDOR • RELIANCE

Customer information packet

EL11301

.33HP, 1740RPM, 1PH, 60HZ, 56, 3418LC, ODP, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	ODP
Frame	56
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	.330 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	115.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CURUSEEV
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	1.700 A @ 230.0 V 2.500 A @ 208.0 V 3.400 A @ 115.0 V
Design Code	N
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	72.4 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	1.7 a

Part detail

Revision	N
Type	AC
Mech. spec.	34F353
Base	
Status	PRD/A
Elec. spec.	34WGW954
Layout	34LYF353
Eff. date	12-31-2024
CD Diagram	CD0055
Poles	04
Leads	6#18
Proprietary	False
Created date	03-11-2014

Insulation Class	F
Inverter Code	Not Inverter
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	6 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3418LC
Mounting Arrangement	F1
Number of Poles	4
Overall Length	10.13 IN
Power Factor	85
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.35
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1740 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3155L									
CAT.NO.	EL11301								
SPEC.	34F353W954G2								
HP	.33								
VOLTS	115/230								
AMP	3.4/1.7								
RPM	1740								
FRAME	56		HZ	60		PH	1		
SER.F.	1.35	CODE	K	DES	N	CL	F		
F.L. AVG. EFF.	72.4	PF	85						
RATING	40C AMB-CONT								
CC									
DE	6203		ODE	6203					
ENCL	ODP	SN							
	SFA 4.4/2.2								

AC Induction Motor Performance Data

Record # 44912

Typical performance - not guaranteed values

Winding: 34WGW954-R003		Type: 3418LC	Enclosure: OPEN	
Nameplate Data			115 V, 60 Hz: Low Voltage Connection	
Rated Output (HP)	.33	Full Load Torque	0.996 LB-FT	
Volts	115/230	Start Configuration	direct on line	
Full Load Amps	3.4/1.7	Breakdown Torque	3.18 LB-FT	
R.P.M.	1740	Pull-up Torque	2.29 LB-FT	
Hz	60 Phase	Locked-rotor Torque	4.26 LB-FT	
NEMA Design Code	- KVA Code	Starting Current	24.1 A	
Service Factor (S.F.)	1.35	No-load Current	1.69 A	
NEMA Nom. Eff.	72.4 Power Factor	Line-line Res. @ 25°C	1.7428 Ω A Ph 5.5858 Ω B Ph	
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	35°C	
S.F. Amps	4.4/2.2	Temp. Rise @ S.F. Load	42°C	

Load Characteristics 115 V, 60 Hz, 0.33 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	62	72	81	85	87	89	88
Efficiency	32.1	64.5	69.3	73.5	76.7	73.7	75.5
Speed	1780.3	1770	1754.7	1739.9	1725.3	1703.3	1716
Line amperes	1.96	2.31	2.87	3.43	3.99	4.81	4.32


ABB Motors and Mechanical Inc.

WINDING # 34WGW954


Typical performance - not guaranteed values.

0.33 HP 1 PH 60 HZ 1740 RPM 115 V 3418LC


TORQUES (LB-FT): PO=3.18 PU=2.29 LR=4.26 LRA=24.1

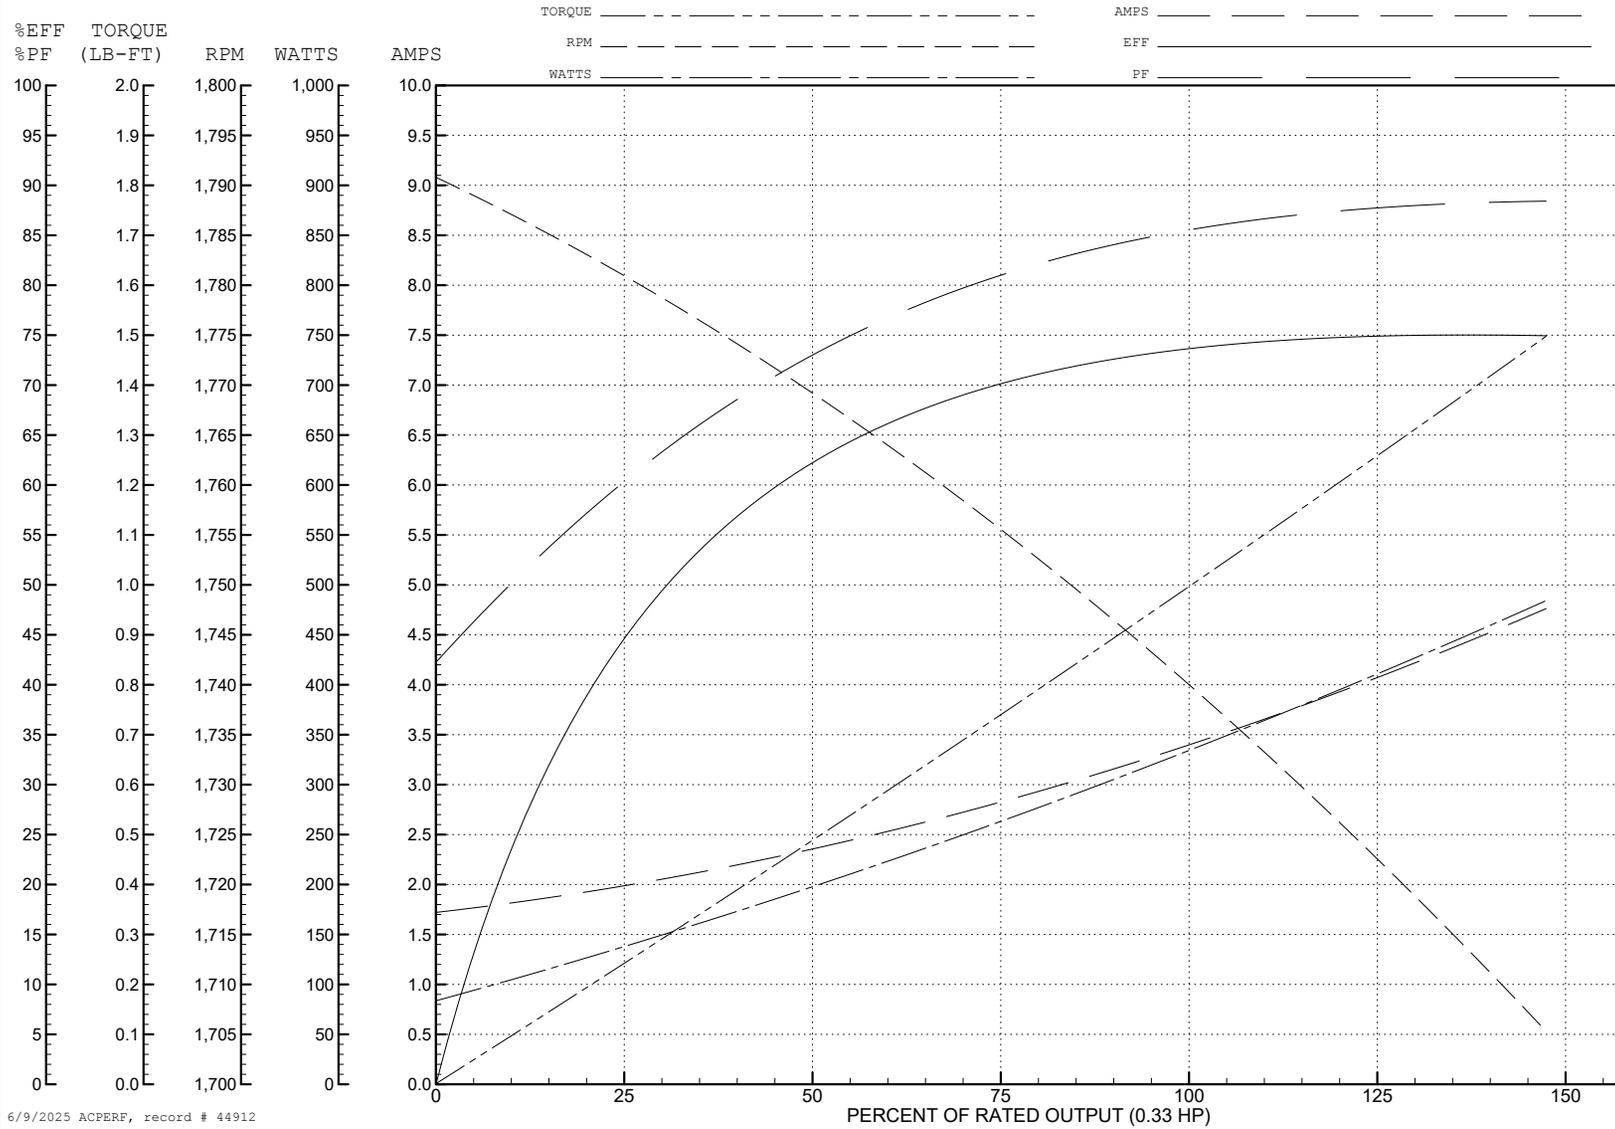

6/9/2025 ACPERF, record # 44912

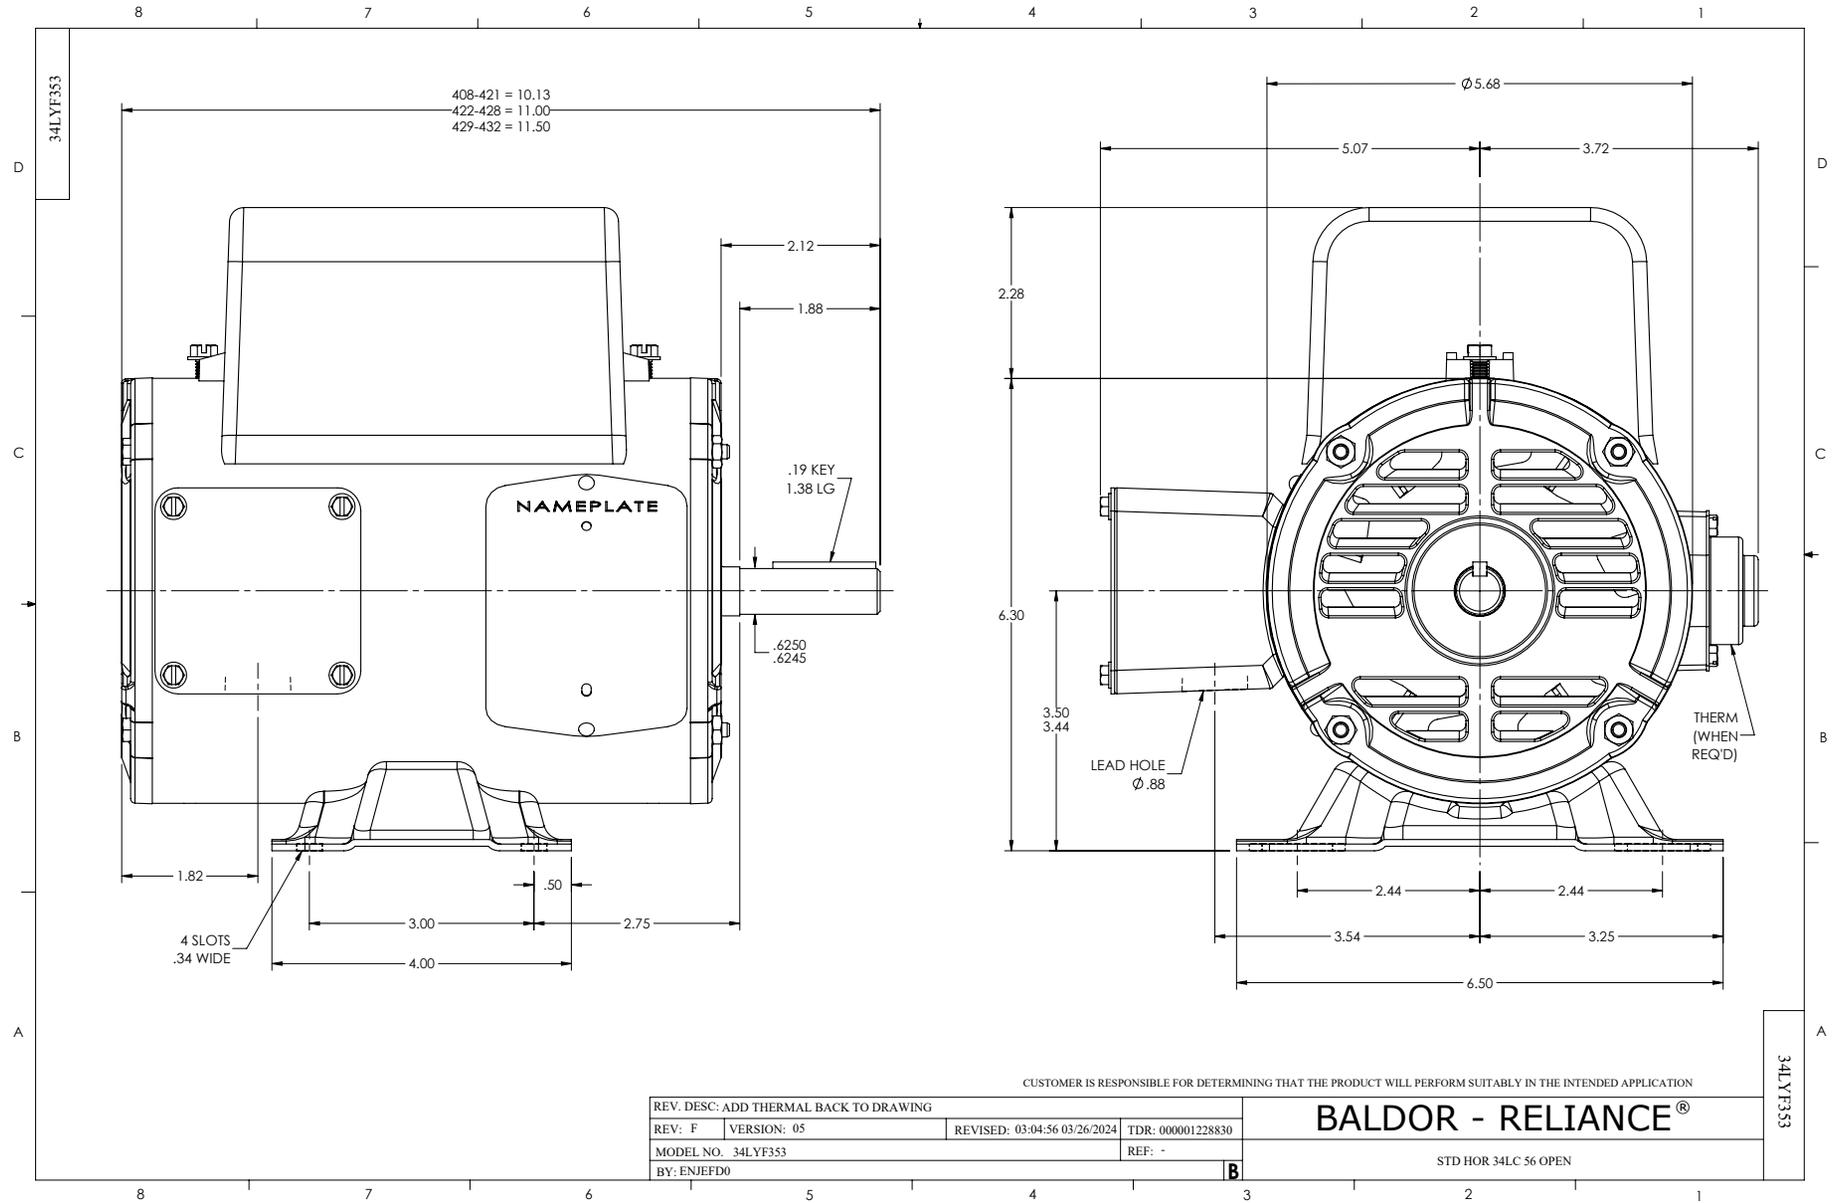

CD0055

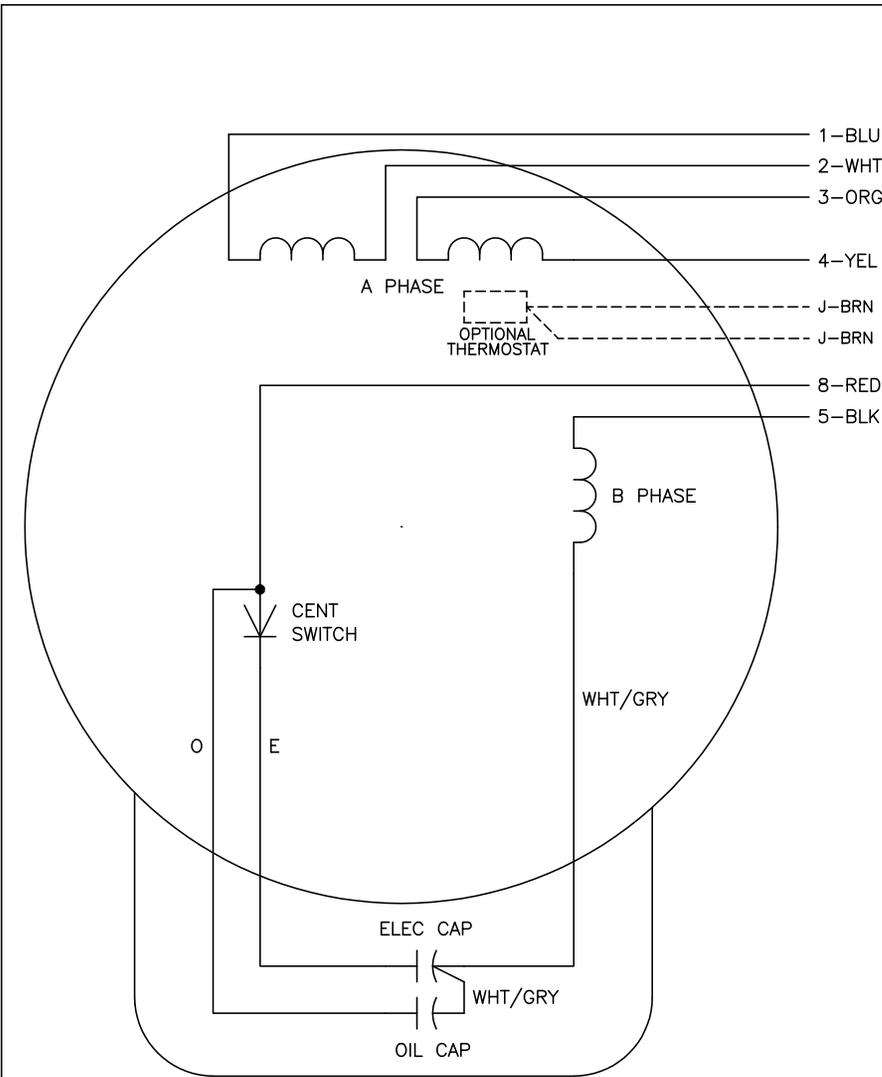

	LINE A	LINE B	JOIN
HIGH STD	1	4,5	2,3,8
HIGH OPP	1	4,8	2,3,5
LOW STD	1,3,8	2,4,5	-
LOW OPP	1,3,5	2,4,8	-

NOTES:

1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
2. OPTIONAL THERMOSTAT IS PROVIDED WHEN SPECIFIED.
3. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: D	BY: JLP	REVISED: 04/08/99 1:17	TDR: 0178636
C00000		FILE: AAA00007414	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

TYPE LC, DV, REV, 6 LEADS

CD0055