



Customer information packet

EL3605T

2HP, 1740RPM, 1PH, 60HZ, 184T, 3623LC, TEFC, F1

Class - None

Division - Not Applicable

Specifications

| | |
|--------------------------------|---|
| Enclosure | TEFC |
| Frame | 182T |
| Frame Material | Steel |
| Frequency | 60.00 Hz |
| Haz Area Class and Group | None |
| Haz Area Division | Not Applicable |
| Motor Letter Type | Cap Start, Cap Run |
| Output @ Frequency | 2.000 HP @ 60 HZ |
| Phase | 1 |
| Synchronous Speed @ Frequency | 1800 RPM @ 60 HZ |
| Voltage @ Frequency | 230.0 V @ 60 HZ 115.0 V @ 60 HZ |
| Agency Approvals | CSA CSA EEV NEMA_PREMIUM UR |
| Ambient Temperature | 40 °C |
| Auxillary Box | No Auxillary Box |
| Auxillary Box Lead Termination | None |
| Base Indicator | Rigid |
| Bearing Grease Type | Polyrex EM (-20F +300F) |
| Blower | None |
| Current @ Voltage | 17.600 A @ 115.0 V 8.800 A @ 230.0 V |
| Design Code | L |
| Drip Cover | No Drip Cover |
| Duty Rating | CONT |
| Efficiency @ 100% Load | 82.5 % |
| Electrically Isolated Bearing | Not Electrically Isolated |
| Feedback Device | NO FEEDBACK |
| Front Face Code | Standard |
| Front Shaft Indicator | None |

Part detail

| | |
|--------------|---------------------|
| Revision | AZ |
| Type | AC |
| Mech. spec. | 36E004 |
| Base | |
| Status | PRD/A |
| Elec. spec. | 36WGY546 |
| Layout | 36LYE004 |
| Eff. date | 05-05-2025 |
| CD Diagram | CD0055 |
| Poles | 04 |
| Leads | 4#14 A PH,2#16 B PH |
| Proprietary | False |
| Created date | 01-01-0001 |

| | |
|-------------------------------|---------------------|
| Heater Indicator | No Heater |
| High Voltage Full Load Amps | 8.8 a |
| Insulation Class | F |
| Inverter Code | Not Inverter |
| KVA Code | J |
| Lifting Lugs | No Lifting Lugs |
| Locked Bearing Indicator | No Locked Bearing |
| Motor Lead Exit | Ko Box |
| Motor Lead Quantity/Wire Size | 4 @ 14 AWG, A PH |
| Motor Lead Termination | Flying Leads |
| Motor Standards | NEMA |
| Motor Type | 3623LC |
| Mounting Arrangement | F1 |
| Number of Poles | 4 |
| Overall Length | 16.56 IN |
| Power Factor | 90 |
| Product Family | General Purpose |
| Pulley End Bearing Type | Ball |
| Pulley Face Code | Standard |
| Pulley Shaft Indicator | Standard |
| Rodent Screen | None |
| Service Factor | 1.15 |
| Shaft Diameter | 1.125 IN |
| Shaft Extension Location | Pulley End |
| Shaft Ground Indicator | No Shaft Grounding |
| Shaft Rotation | Reversible |
| Shaft Slinger Indicator | No Slinger |
| Speed | 1740 rpm |
| Speed Code | Single Speed |
| Starting Method | Direct on line |
| Thermal Device - Bearing | None |
| Thermal Device - Winding | None |
| Vibration Sensor Indicator | No Vibration Sensor |
| Winding Thermal 1 | None |

Winding Thermal 2

None

Nameplate

| NP2116L | | | | | | | | | |
|---------------------|---------------|-------------|------|------------|----|-----------|-----------|---|--|
| CAT.NO. | EL3605T | | | | | | | | |
| SPEC. | 36E004Y546G1 | | | | | | | | |
| HP | 2 | | | | | | | | |
| VOLTS | 115/230 | | | | | | | | |
| AMP | 17.6/8.8 | | | | | | | | |
| RPM | 1740 | | | | | | | | |
| FRAME | 182T | | | HZ | 60 | | PH | 1 | |
| SER.F. | 1.15 | CODE | J | DES | L | CL | F | | |
| NEMA-NOM-EFF | 82.5 | PF | 90 | | | | | | |
| RATING | 40C AMB-CONT | | | | | | | | |
| CC | | | | | | | | | |
| DE | 6206 | ODE | 6205 | | | | | | |
| ENCL | TEFC | SN | | | | | | | |
| | SFA 20.4/10.2 | | | | | | | | |

Accessories

| Part number | Description | Multiplier |
|--------------------|---|-------------------|
| 36-3301 | C FACE KIT | A8 |
| 36EP1304A62SP | FLANGE MTD ENDPLATE 182-4TD -ENCL (LESS | A8 |

AC Induction Motor Performance Data

Record # 11408

Typical performance - not guaranteed values

| Winding: 36WGY546-R001 | | Type: 3623LC | | Enclosure: TEFC | |
|-------------------------------|--------------------------|--------------------------------|--|----------------------------|--|
| Nameplate Data | | | 230 V, 60 Hz: High Voltage Connection | | |
| Rated Output (HP) | 2 | Full Load Torque | 6.1 LB-FT | | |
| Volts | 115/230 | Start Configuration | direct on line | | |
| Full Load Amps | 17.6/8.8 | Breakdown Torque | 13.2 LB-FT | | |
| R.P.M. | 1740 | Pull-up Torque | 9.2 LB-FT | | |
| Hz | 60 Phase | 1 | Locked-rotor Torque | 14.7 LB-FT | |
| NEMA Design Code | L KVA Code | J | Starting Current | 62.4 A | |
| Service Factor (S.F.) | 1.15 | No-load Current | 2.72 A | | |
| NEMA Nom. Eff. | 82.5 Power Factor | 90 | Line-line Res. @ 25°C | 1.22 Ω A Ph 0.64 Ω B Ph | |
| Rating - Duty | 40C AMB-CONT | Temp. Rise @ Rated Load | 55°C | | |
| S.F. Amps | 20.4/10.2 | Temp. Rise @ S.F. Load | 71°C | | |

Load Characteristics 230 V, 60 Hz, 2 HP

| % of Rated Load | 25 | 50 | 75 | 100 | 125 | 150 | S.F. |
|------------------------|-----------|-----------|-----------|------------|------------|------------|-------------|
| Power Factor | 67 | 82 | 87 | 90 | 91 | 90 | 0 |
| Efficiency | 72.4 | 82.1 | 84 | 83 | 80.1 | 75.4 | 0 |
| Speed | 1784 | 1771 | 1755 | 1739 | 1716 | 1685 | 0 |
| Line amperes | 3.48 | 4.9 | 6.68 | 8.78 | 11.28 | 14.36 | 10.2 |


ABB Motors and Mechanical Inc.

WINDING # 36WGY546


Typical performance - not guaranteed values.

2 HP 1 PH 60 HZ 1740 RPM 230 V 3623LC


TORQUES (LB-FT): PO=13.2 PU=9.2 LR=14.7 LRA=62.4

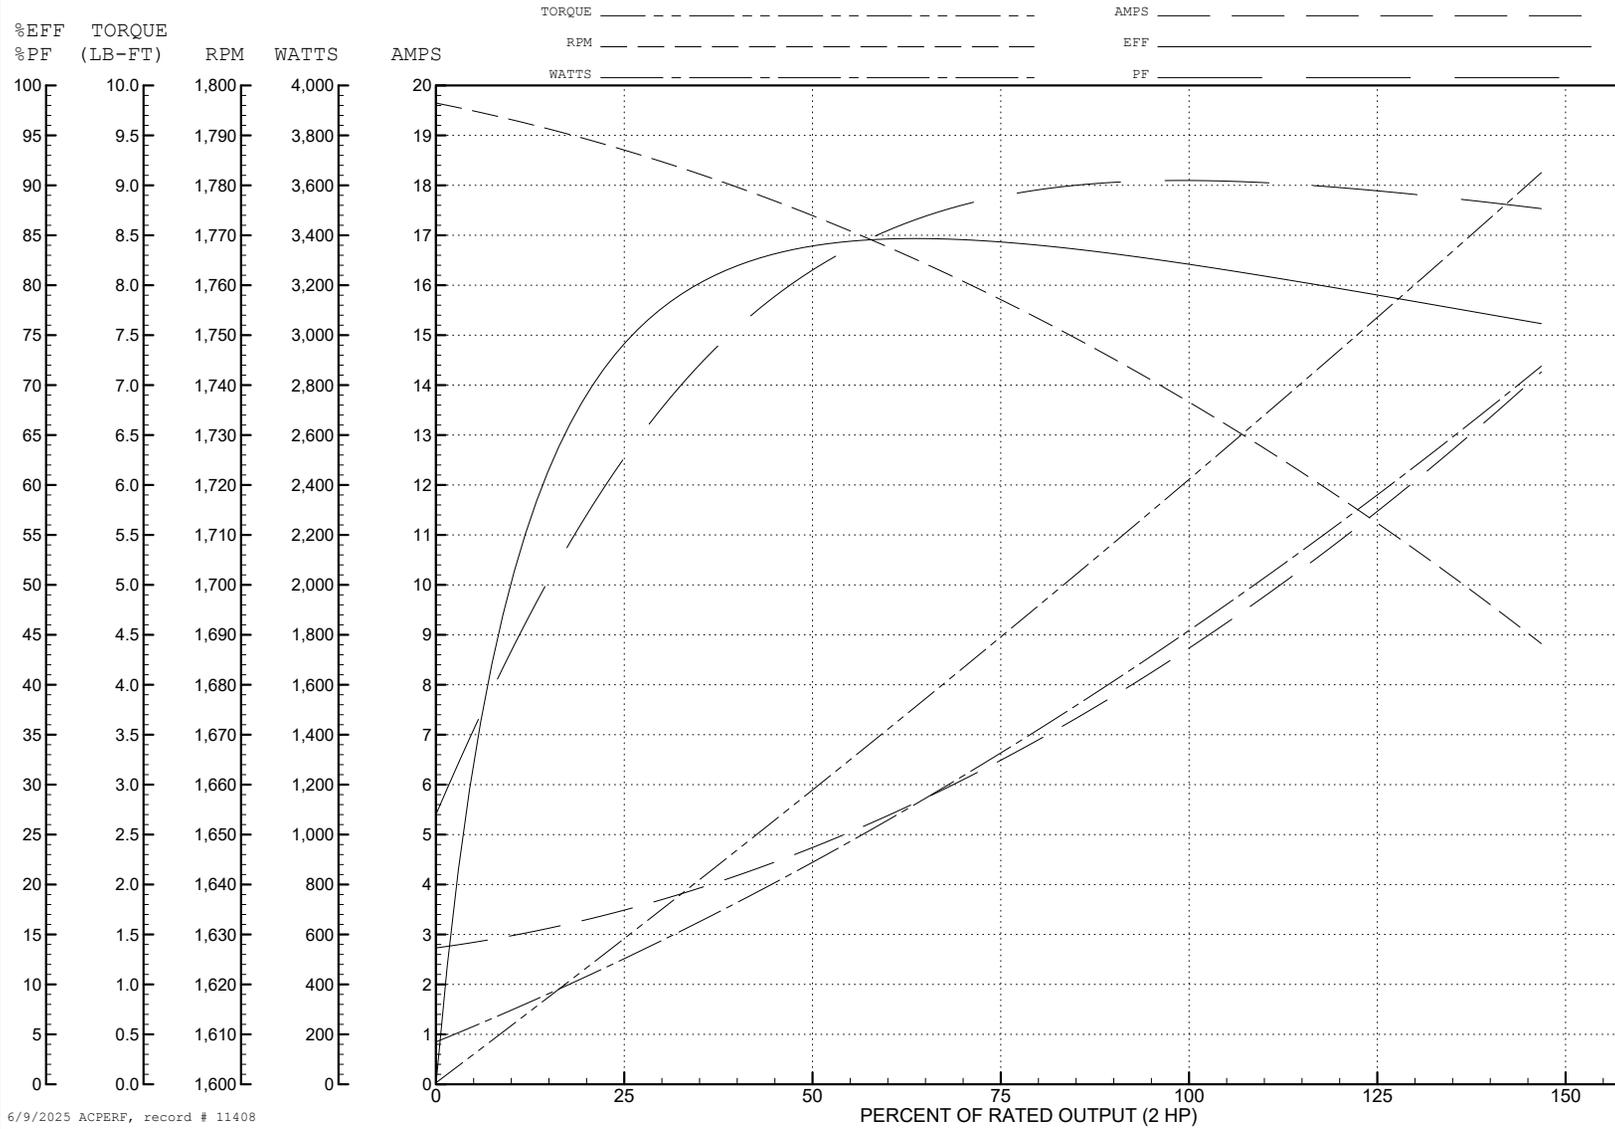

6/9/2025 ACPERF, record # 11408

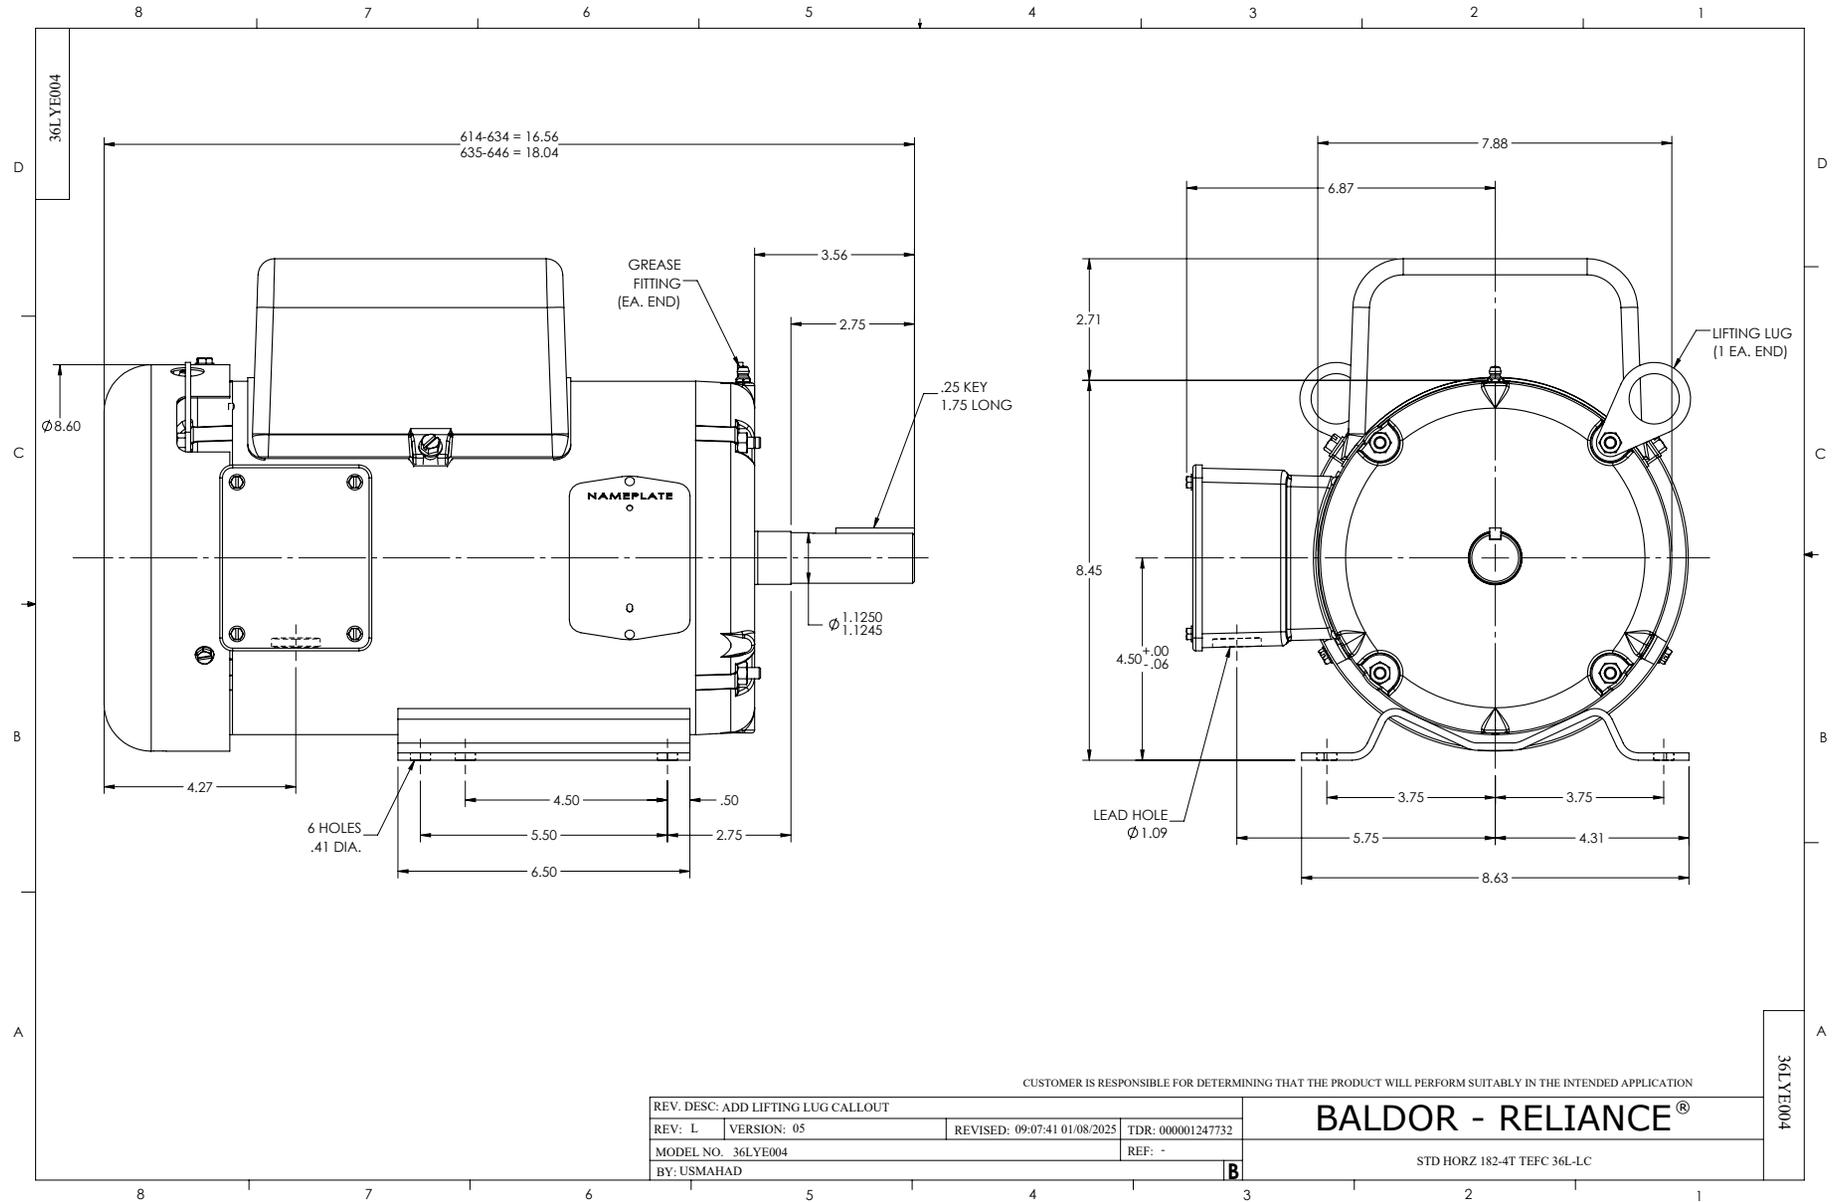

CD0055

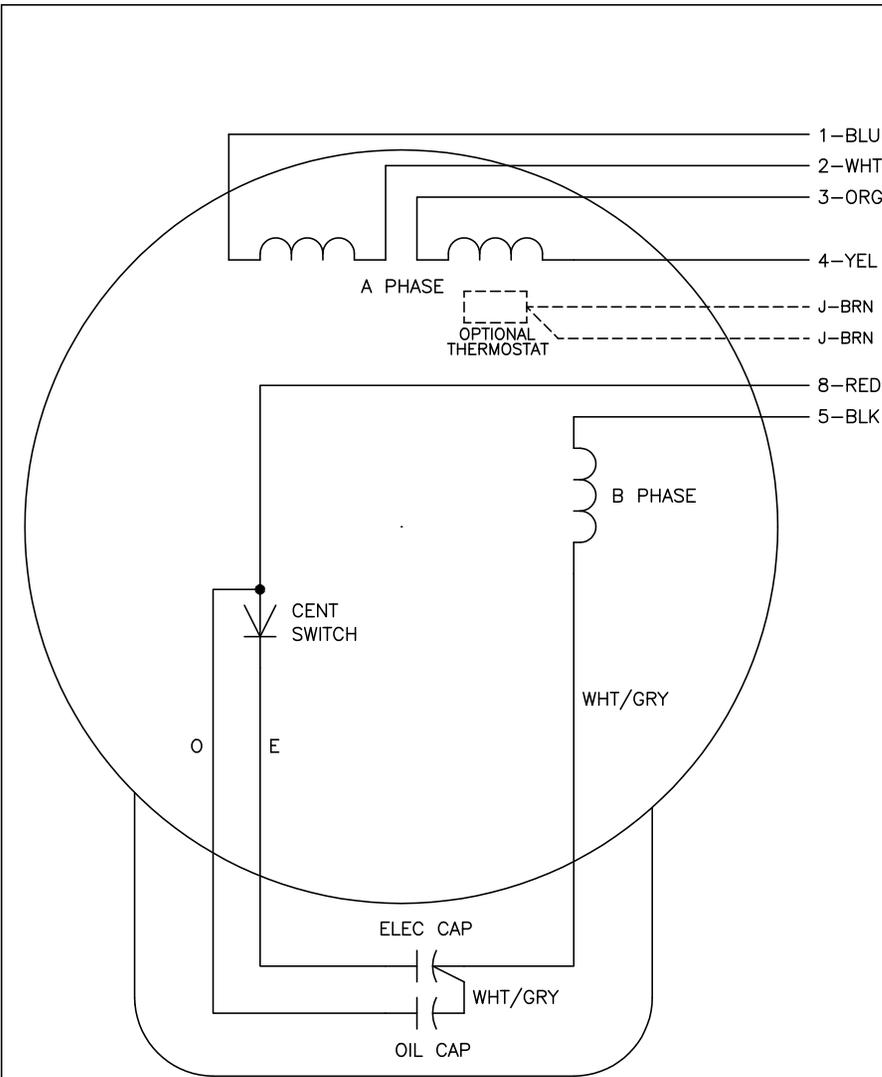

| | LINE A | LINE B | JOIN |
|----------|--------|--------|-------|
| HIGH STD | 1 | 4,5 | 2,3,8 |
| HIGH OPP | 1 | 4,8 | 2,3,5 |
| LOW STD | 1,3,8 | 2,4,5 | - |
| LOW OPP | 1,3,5 | 2,4,8 | - |

NOTES:

1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
2. OPTIONAL THERMOSTAT IS PROVIDED WHEN SPECIFIED.
3. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

| | | | |
|---|---------|------------------------|--------------|
| REV. DESC: REVISE TO SHOW OPTIONAL COLORS | | | |
| REV. LTR: D | BY: JLP | REVISED: 04/08/99 1:17 | TDR: 0178636 |
| C00000 | | FILE: AAA00007414 | MDL: - |
| | | MTL: - | |

BALDOR ELECTRIC Co.

TYPE LC, DV, REV, 6 LEADS

CD0055