



Customer information packet

EM2534T

30HP, 3530RPM, 3PH, 60HZ, 284TS, 4040M, OPSB, F

Specifications

Enclosure	OPSB
Frame	284TS
Frame Material	Steel
Frequency	60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	30.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CSA EEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	76.000 A @ 208.0 V 70.000 A @ 230.0 V 35.000 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.7 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater

Part detail

Revision	U
Type	AC
Mech. spec.	40G51
Base	
Status	PRD/A
Elec. spec.	40WGX193
Layout	40LYG051
Eff. date	06-27-2024
CD Diagram	CD0180
Poles	02
Leads	9#8
Proprietary	False
Created date	10-15-2010

High Voltage Full Load Amps	35.0 a
Insulation Class	F
Inverter Code	Inverter Ready
IP Rating	NONE
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 8 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	4040M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	22.44 IN
Power Factor	87
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3530 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2

None

Nameplate

NP3554LUA											
CAT.NO.	EM2534T			P/N						ENCL	OPSB
SPEC.	40G051X193		CC	010A		FRAME	284TS		SER.NO.		
HP	30			CLASS	F	HZ	60				
RPM	3530			PH	3	DES	A				
VOLTS	230/460				CODE	H	ODE BRG	6309	DE BRG	6311	
AMPS	70/35										
RATING	40C AMB-CONT			NEMA-NOM-EFF			91.7	GREASE	POLYREX EM		
PF	87	SER.F.	1.15		CT30-60(2:1) VT3-60(20:1)						
USABLE AT	50HZ 30HP 190/380V 84/42A				SF 1.0 <td colspan="3"></td>						
HTR-VOLTS	HTR-AMPS	MAX. SPACE HEATER TEMP.									

Accessories

Part number	Description	Multiplier
40-1400	C FACE KIT	A8

AC Induction Motor Performance Data

Record # 53041

Typical performance - not guaranteed values

Winding: 40WGX193-R006			Type: 4040M		Enclosure: OPSB	
Nameplate Data				460 V, 60 Hz: High Voltage Connection		
Rated Output (HP)		30		Full Load Torque		44.7 LB-FT
Volts		230/460		Start Configuration		direct on line
Full Load Amps		70/35		Breakdown Torque		175 LB-FT
R.P.M.		3530		Pull-up Torque		59.3 LB-FT
Hz	60	Phase	3	Locked-rotor Torque		78.3 LB-FT
NEMA Design Code		A	KVA Code	H	Starting Current	
Service Factor (S.F.)		1.15		No-load Current		11.2 A
NEMA Nom. Eff.		91.7	Power Factor	0	Line-line Res. @ 25°C	
Rating - Duty		40C		AMB-CONT		Temp. Rise @ Rated Load
S.F. Amps						Temp. Rise @ S.F. Load
						Locked-rotor Power Factor
						Rotor inertia

Load Characteristics 460 V, 60 Hz, 30 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	58	77	84	87	88	89	88
Efficiency	89.3	92.8	93.4	93.2	92.6	91.8	92.8
Speed	3582.7	3568.7	3554.6	3538.7	3522.3	3504.1	3529
Line amperes	14.4	20.3	27.2	35.1	43.4	52.1	40.1


ABB Motors and Mechanical Inc.


WINDING # 40WGX193

Typical performance - not guaranteed values.




30 HP 3 PH 60 HZ 3530 RPM 460 V 4040M

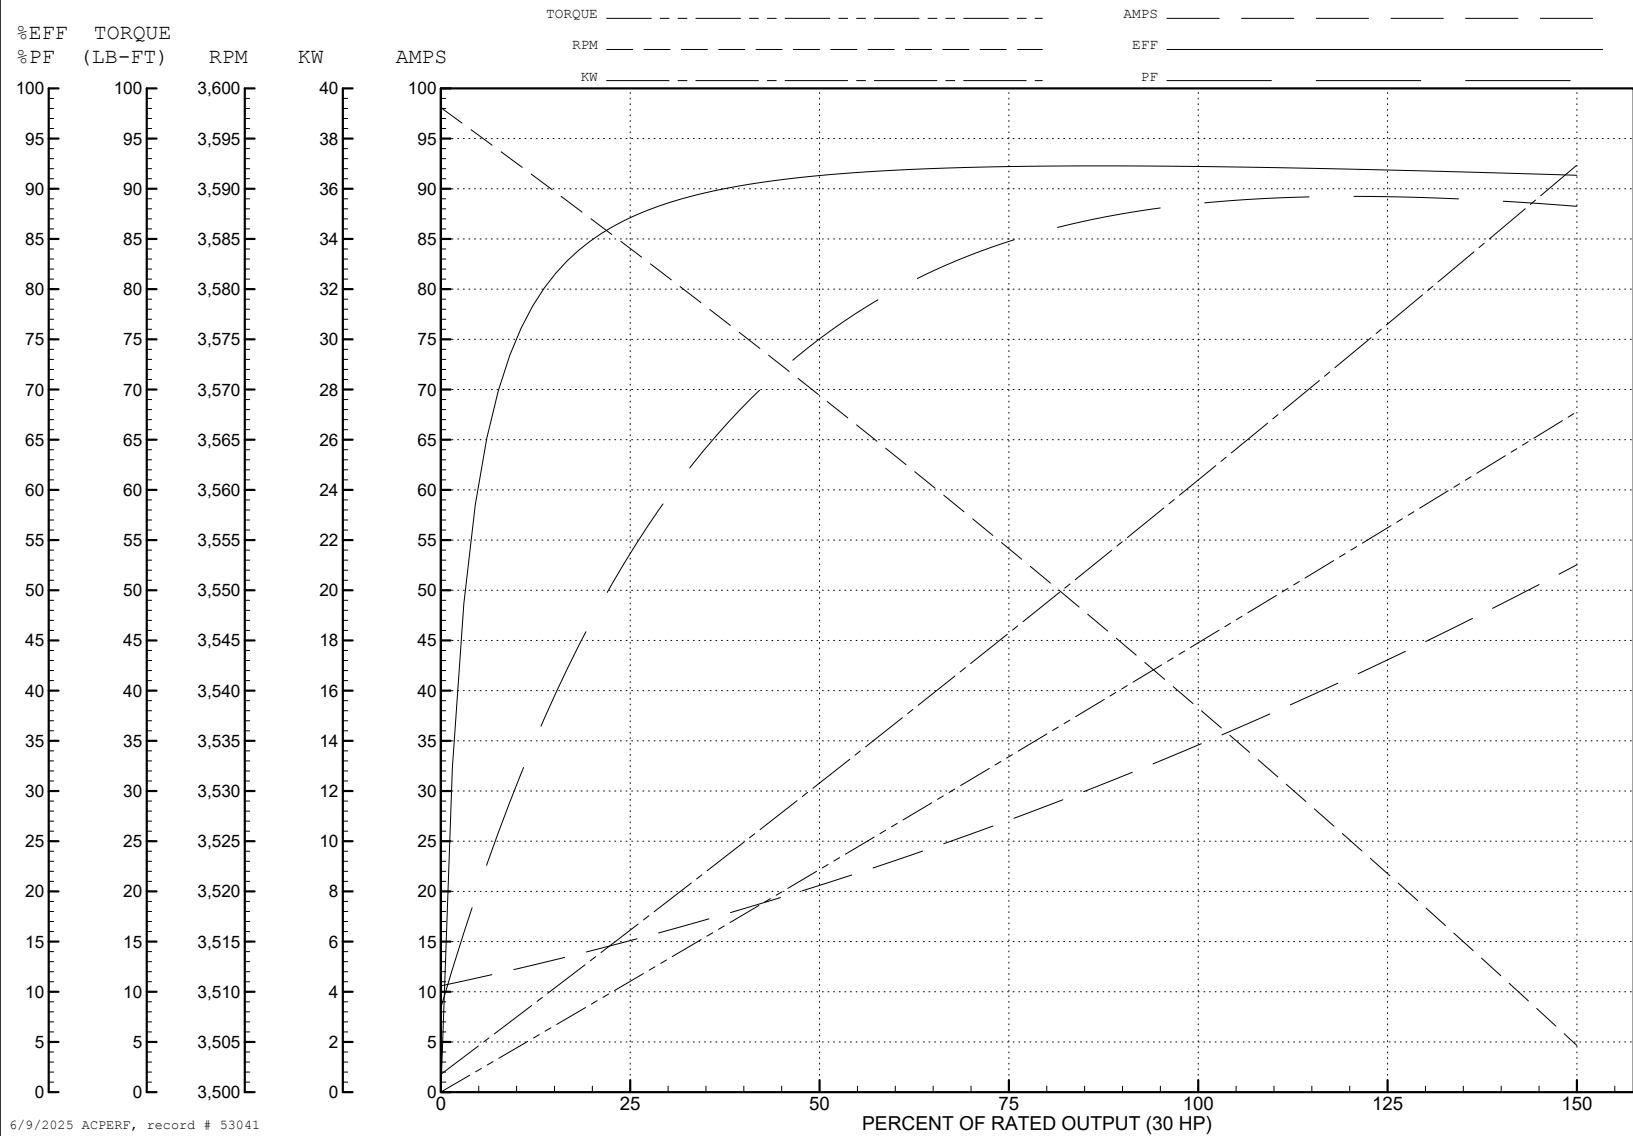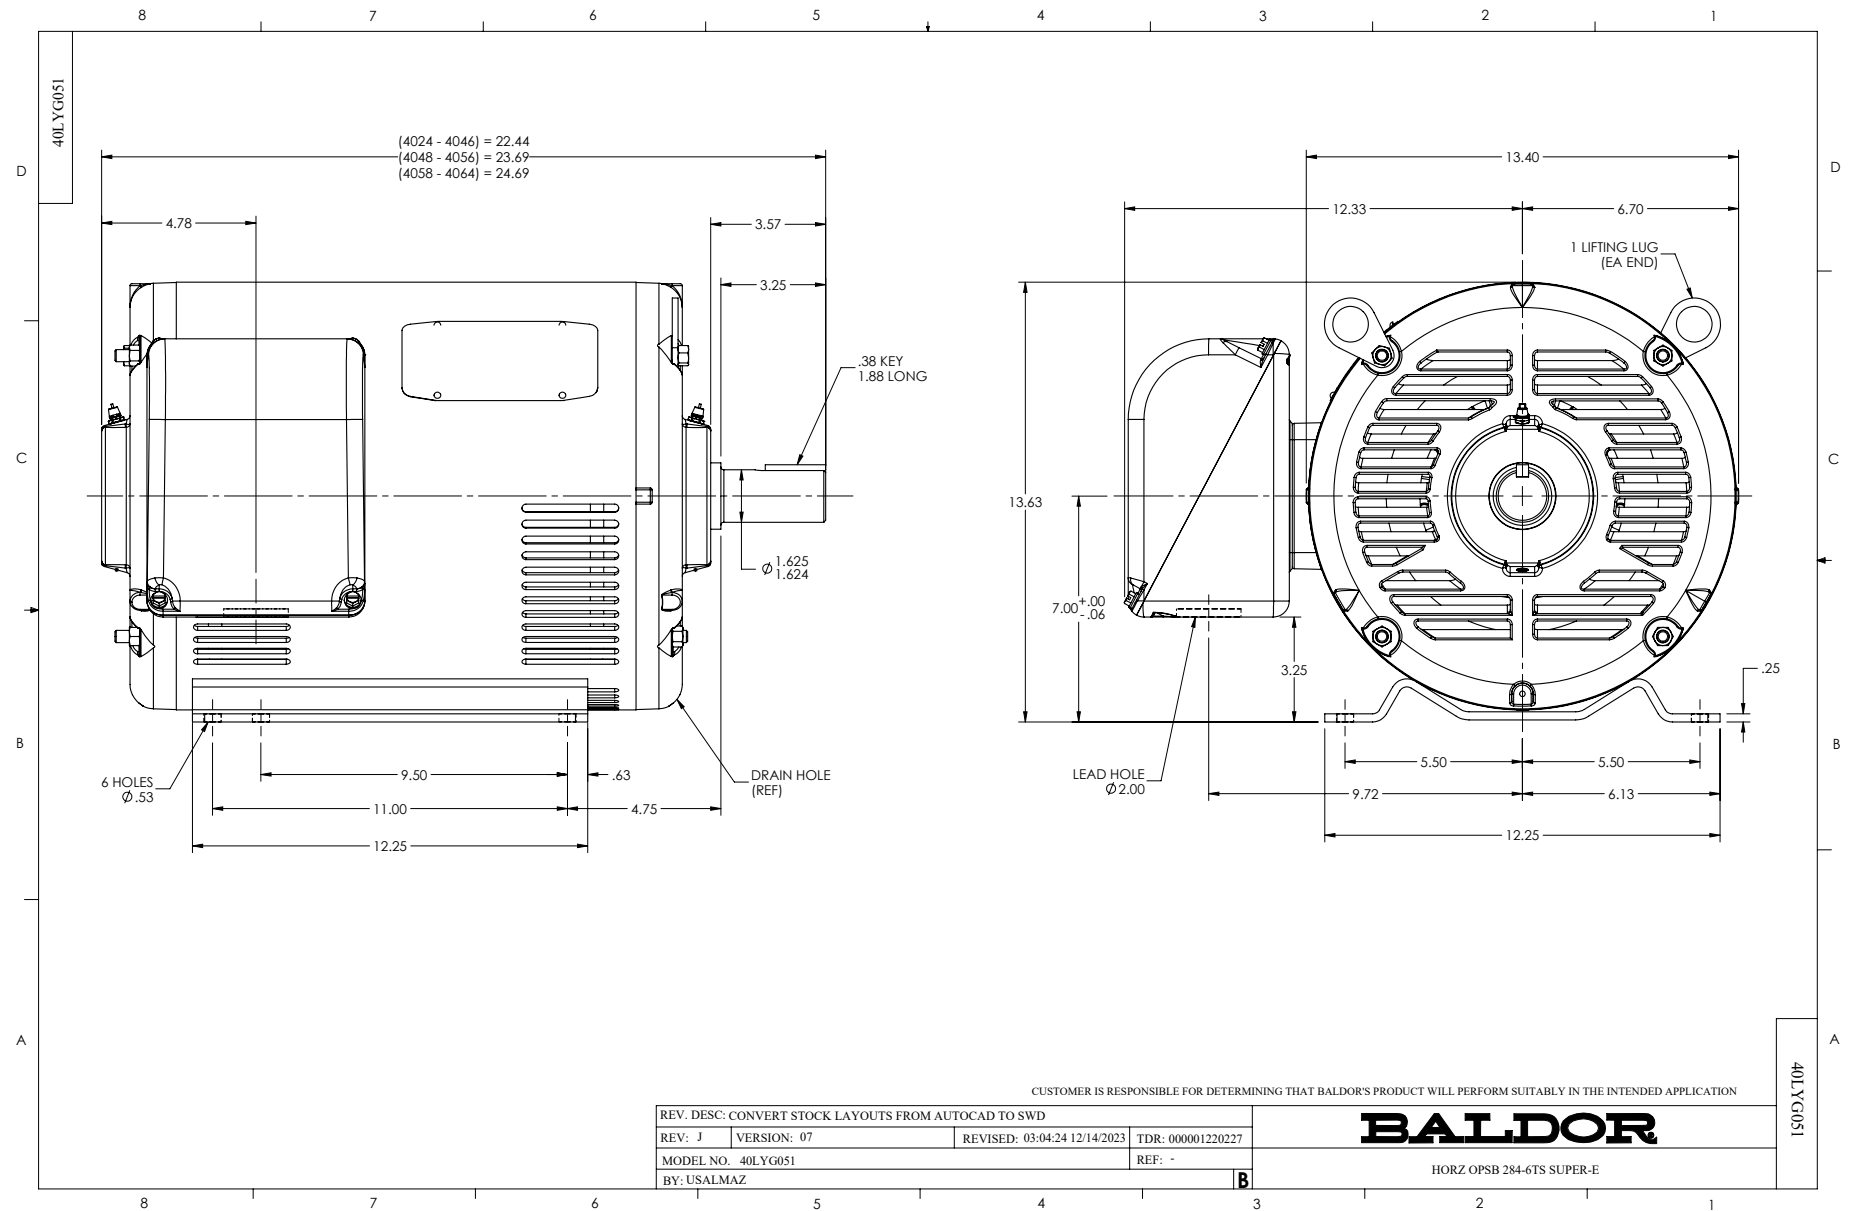TORQUES (LB-FT): PO=175 PU=59.3 LR=78.3 LRA=240





CD0180

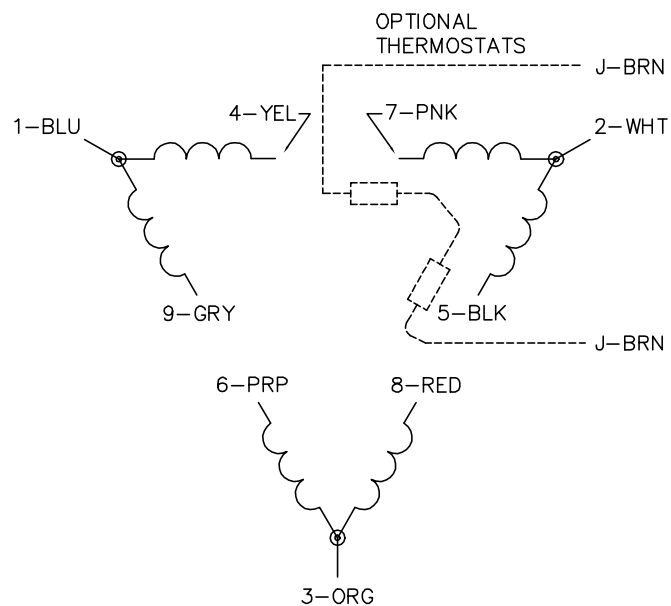LOW VOLTAGE
(2D)HIGH VOLTAGE
(1D)

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007

REV. LTR: D

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\148

REVISED: 10: 25: 29 02/19/2019

BY: ENBRIRO

MTL: —

**BALDOR - RELIANCE®**

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1