



Customer information packet

EM3211T-57

3HP, 1450RPM, 3PH, 50HZ, 182T, 3630M, OPEN, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	OPEN
Frame	182T
Frame Material	Steel
Frequency	50.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	3.000 HP @ 50 HZ
Phase	3
Synchronous Speed @ Frequency	1500 RPM @ 50 HZ
Voltage @ Frequency	230.0 V @ 50 HZ 400.0 V @ 50 HZ
Agency Approvals	C UR US CE CURUS IE3 UKCA WEEE
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	4.850 A @ 400.0 V 8.400 A @ 230.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	86.7 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK

Part detail

Revision	E
Type	AC
Mech. spec.	36B001
Base	
Status	PRD/A
Elec. spec.	36WGR999
Layout	36LYB001
Eff. date	05-08-2024
CD Diagram	CD0022
Poles	04
Leads	6#16
Proprietary	False
Created date	12-22-2015

Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	4.9 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	J
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	6 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3630M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	15.00 IN
Power Factor	76
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None

Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP2716L										
CAT NO	EM3211T-57									
SPEC.	36B001R999G1									
HP	3/2.2KW						PH	3		
VOLTS	230/400									
AMP	8.4/4.85									
R.P.M. (1/MIN)	1450									
FRAME	182T		HZ	50		I.P.	23			
SER.F.	1.15	CODE	J	DES	B	CL	F			
NOM.EFF.	86.7		% (100%)							
PF	76									
RATING	40C AMB-S1 CONT				CC					
DE BRG	6206		ODE	6205						
ENCL	OPEN	SN								
BLANK	IE3-88.1(75%)86.8(50%)									
	IC01 34KG									

AC Induction Motor Performance Data

Record # 54654

Typical performance - not guaranteed values

Winding: 36WGR999-R001		Type: 3630M		Enclosure: OPEN	
Nameplate Data			400 V, 50 Hz: High Voltage Connection		
Rated Output (HP)	3		Full Load Torque	10.8 LB-FT	
Volts	230/400		Start Configuration	direct on line	
Full Load Amps	8.4/4.85		Breakdown Torque	41 LB-FT	
R.P.M.	1450		Pull-up Torque	19.5 LB-FT	
Hz	50 Phase	3	Locked-rotor Torque	24.4 LB-FT	
NEMA Design Code	B KVA Code	J	Starting Current	33.3 A	
Service Factor (S.F.)	1.15		No-load Current	2.58 A	
NEMA Nom. Eff.	86.7 Power Factor	76	Line-line Res. @ 25°C	3.77 Ω	
Rating - Duty	40C AMB-CONT		Temp. Rise @ Rated Load	51°C	
S.F. Amps			Temp. Rise @ S.F. Load	62°C	
			Locked-rotor Power Factor	48.4	
			Rotor inertia	0.279 LB-FT ²	

Load Characteristics 400 V, 50 Hz, 3 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	35	56	69	76	81	82	79
Efficiency	80.5	86.8	88.1	87.8	86.4	84.8	87
Speed	1489	1479	1467	1456	1442	1425	1448
Line amperes	2.79	3.29	3.97	4.85	5.78	6.95	5.41


ABB Motors and Mechanical Inc.

WINDING # 36WGR999


3 HP 3 PH 50 HZ 1450 RPM 400 V 3630M

Typical performance - not guaranteed values.


TORQUES (LB-FT): PO=41 PU=19.5 LR=24.4 LRA=33.3

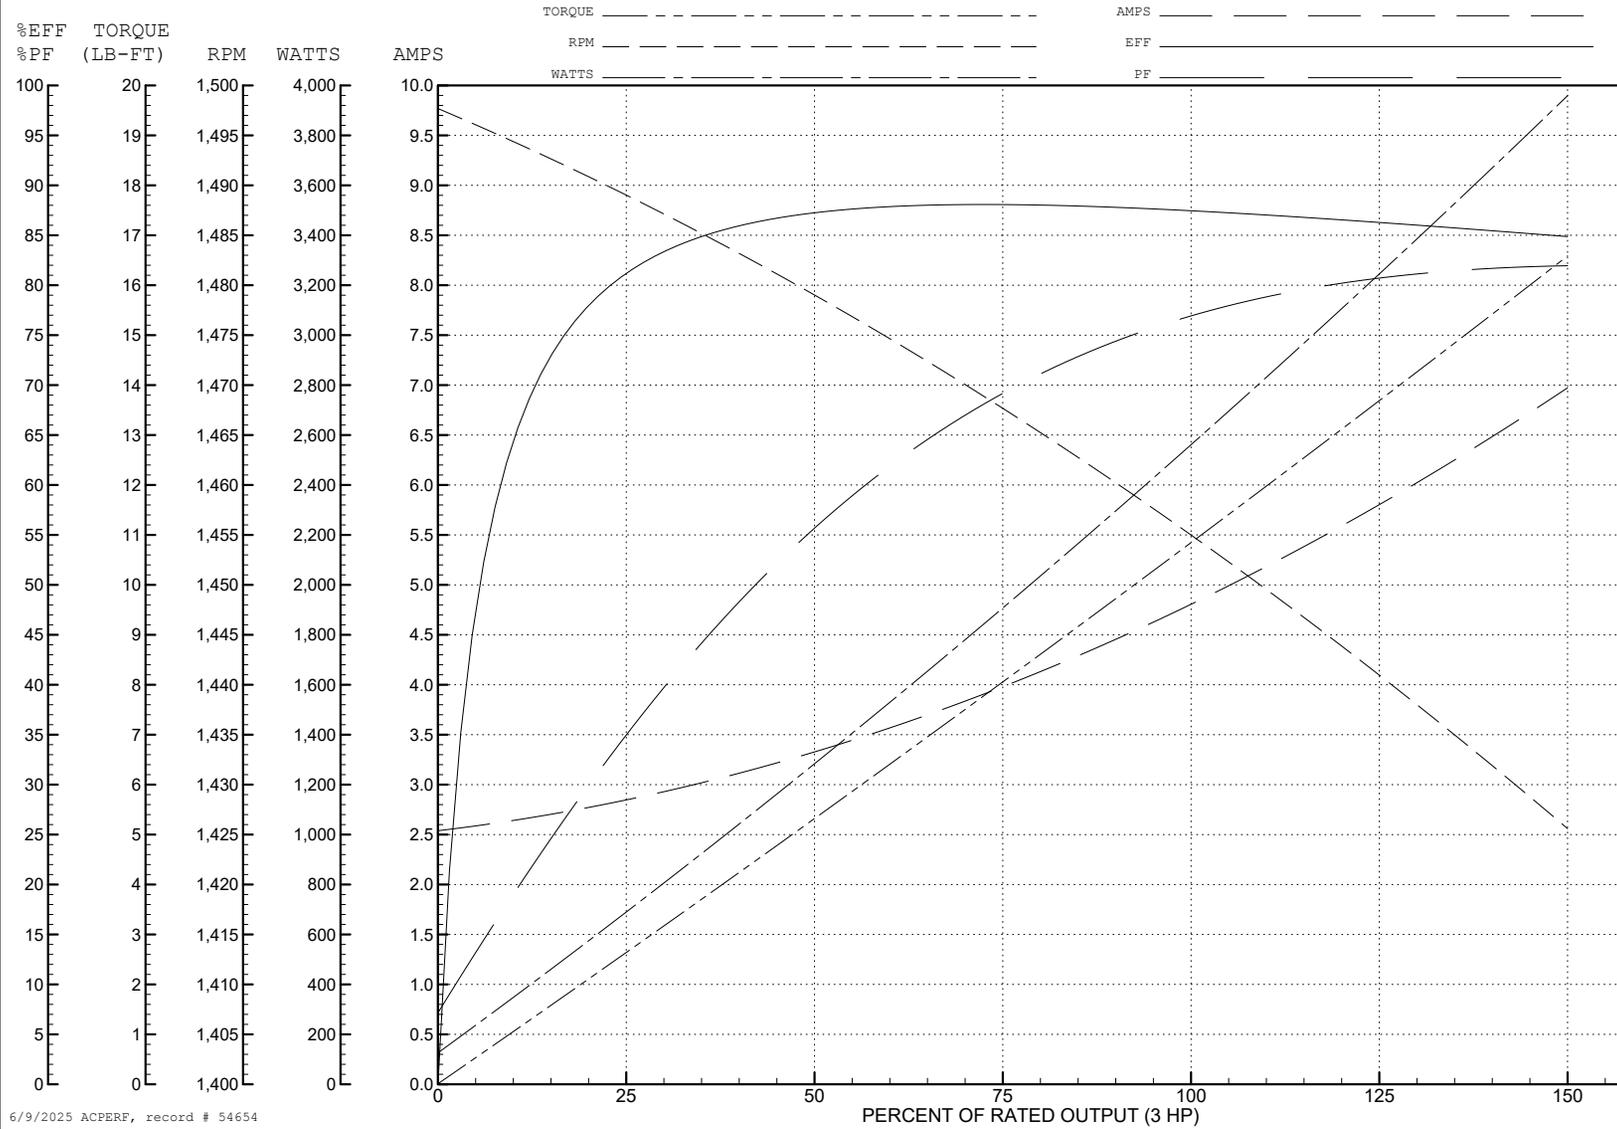


6/9/2025 ACPERF, record # 54654

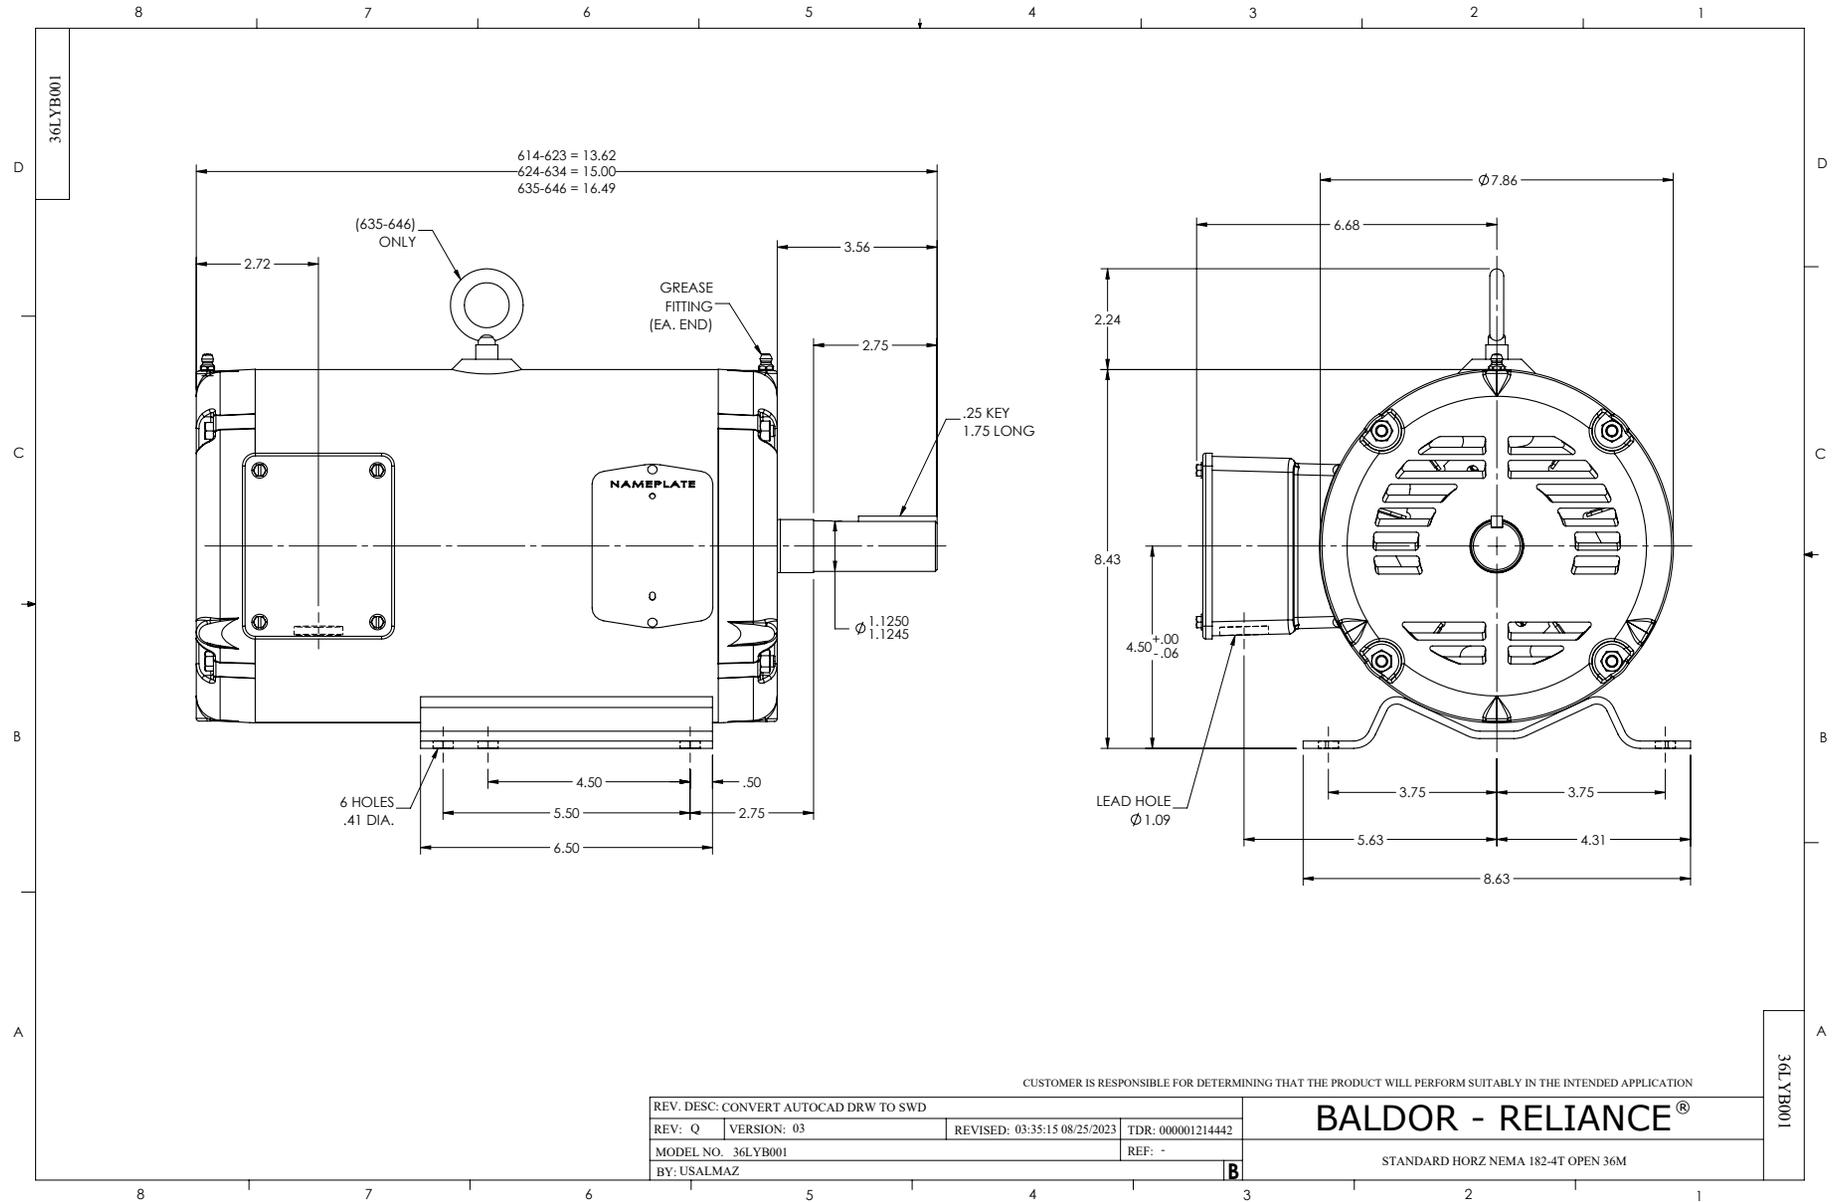

CD0022

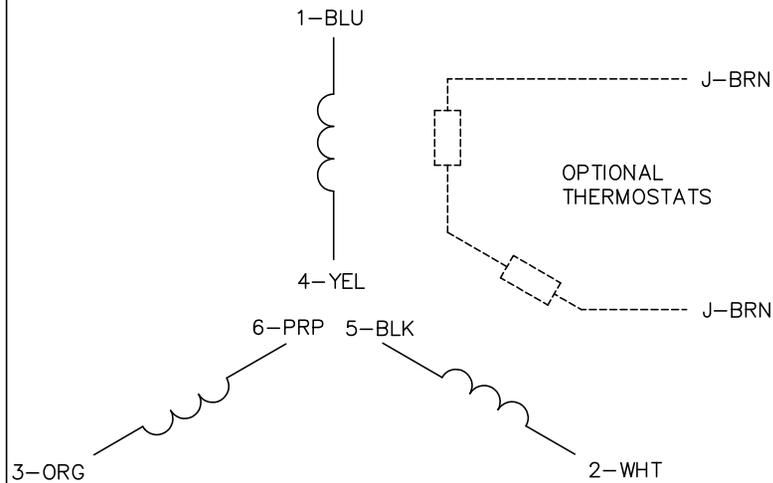


LOW VOLTAGE
(1D)



LINE

HIGH VOLTAGE
(1Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: F	BY: JLP	REVISED: 01/21/99 3:54	TDR: 0171435
CD0022		FILE: AAA00005144	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 6 LEADS, DELTA/WYE CONNECTION

CD0022