



Customer information packet

EM3219T-8

7.5HP, 3450RPM, 3PH, 60HZ, 184T, 3632M, OPSB, F

Class - None

Division - Not Applicable

Specifications

Enclosure	OPSB
Frame	184T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	7.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	200.0 V @ 60 HZ
Agency Approvals	CSA EEV CURUSEEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	20.000 A @ 200.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	88.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater

Part detail

Revision	P
Type	AC
Mech. spec.	36B101
Base	
Status	PRD/A
Elec. spec.	36WGS856
Layout	36LYB101
Eff. date	10-14-2024
CD Diagram	CD0006
Poles	02
Leads	3#12
Proprietary	False
Created date	08-04-2015

High Voltage Full Load Amps	20.0 a
Insulation Class	F
Inverter Code	Not Inverter
IP Rating	NONE
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 12 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3632M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	15.00 IN
Power Factor	91
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2	None
-------------------	------

Nameplate

NP3553L									
CAT.NO.	EM3219T-8								
SPEC	36B101S856G3								
HP	7.5								
VOLTS	200								
AMPS	20								
RPM	3450								
FRAME	184T		HZ	60		PH	3		
SF	1.15	CODE	L	DES	A	CLASS	F		
NEMA NOM. EFF	88.5	PF	91						
RATING	40C AMB-CONT								
CC	010A								
ENCL	OPSB	SER							
DE	6206		ODE	6205					
VPWM INVERTER READY									
CT30-60(2:1) VT3-60(20:1)									

AC Induction Motor Performance Data

Record # 52211

Typical performance - not guaranteed values

Winding: 36WGS856-R001			Type: 3632M		Enclosure: OPSB			
Nameplate Data			200 V, 60 Hz: Single Voltage Motor					
Rated Output (HP)		7.5	Full Load Torque		11.3 LB-FT			
Volts		200	Start Configuration		direct on line			
Full Load Amps		20	Breakdown Torque		54.1 LB-FT			
R.P.M.		3450	Pull-up Torque		36.4 LB-FT			
Hz	60	Phase	3	Locked-rotor Torque		41.9 LB-FT		
NEMA Design Code		A	KVA Code	L	Starting Current		197 A	
Service Factor (S.F.)		1.15	No-load Current		7 A			
NEMA Nom. Eff.		88.5	Power Factor		91	Line-line Res. @ 25°C		0.33 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		45°C		
S.F. Amps				Temp. Rise @ S.F. Load		55°C		
				Locked-rotor Power Factor		49.2		
				Rotor inertia		0.143 LB-FT2		

Load Characteristics 200 V, 60 Hz, 7.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	57	80	87	91	93	93	90
Efficiency	81.8	88	89.3	89.2	88	85.9	87.7
Speed	3572	3543	3513	3479	3442	3403	3470
Line amperes	8.51	11.5	15.5	19.9	24.7	30.3	23.7


ABB Motors and Mechanical Inc.


WINDING # 36WGS856

Typical performance - not guaranteed values.

7.5 HP 3 PH 60 HZ 3450 RPM 200 V 3632M


TORQUES (LB-FT): PO=54.1 PU=36.4 LR=41.9 LRA=197

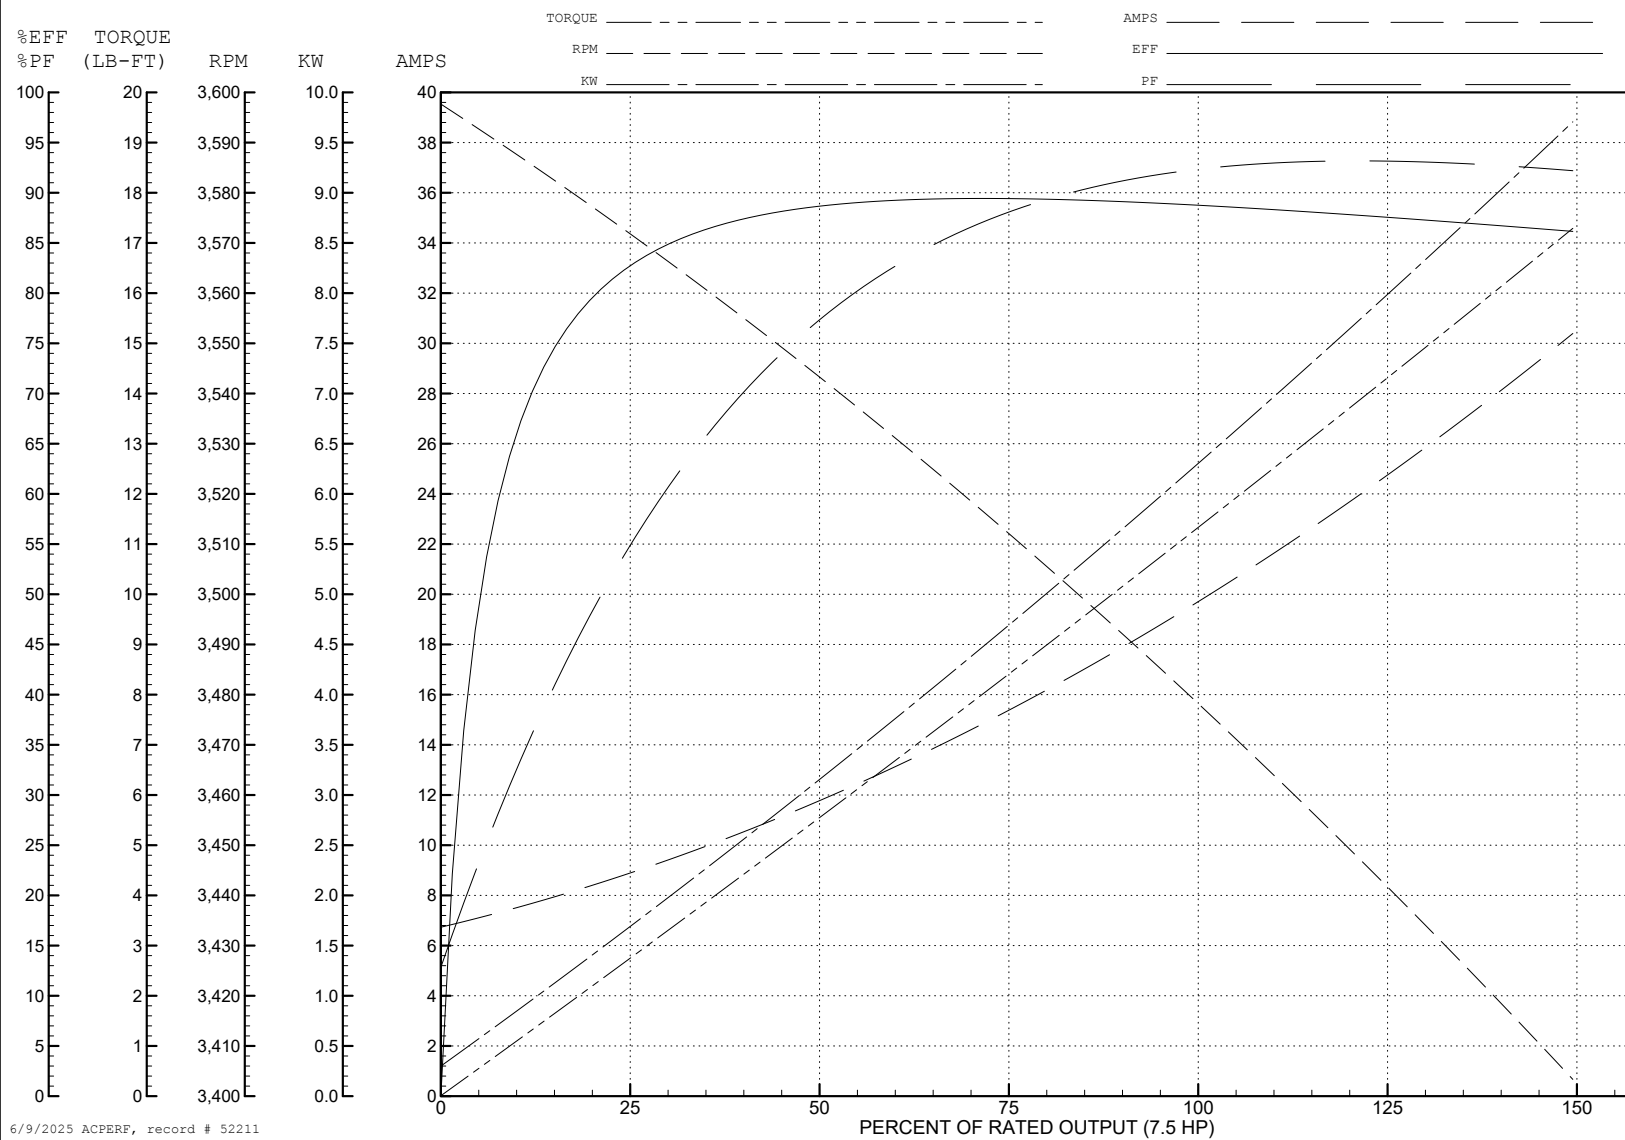

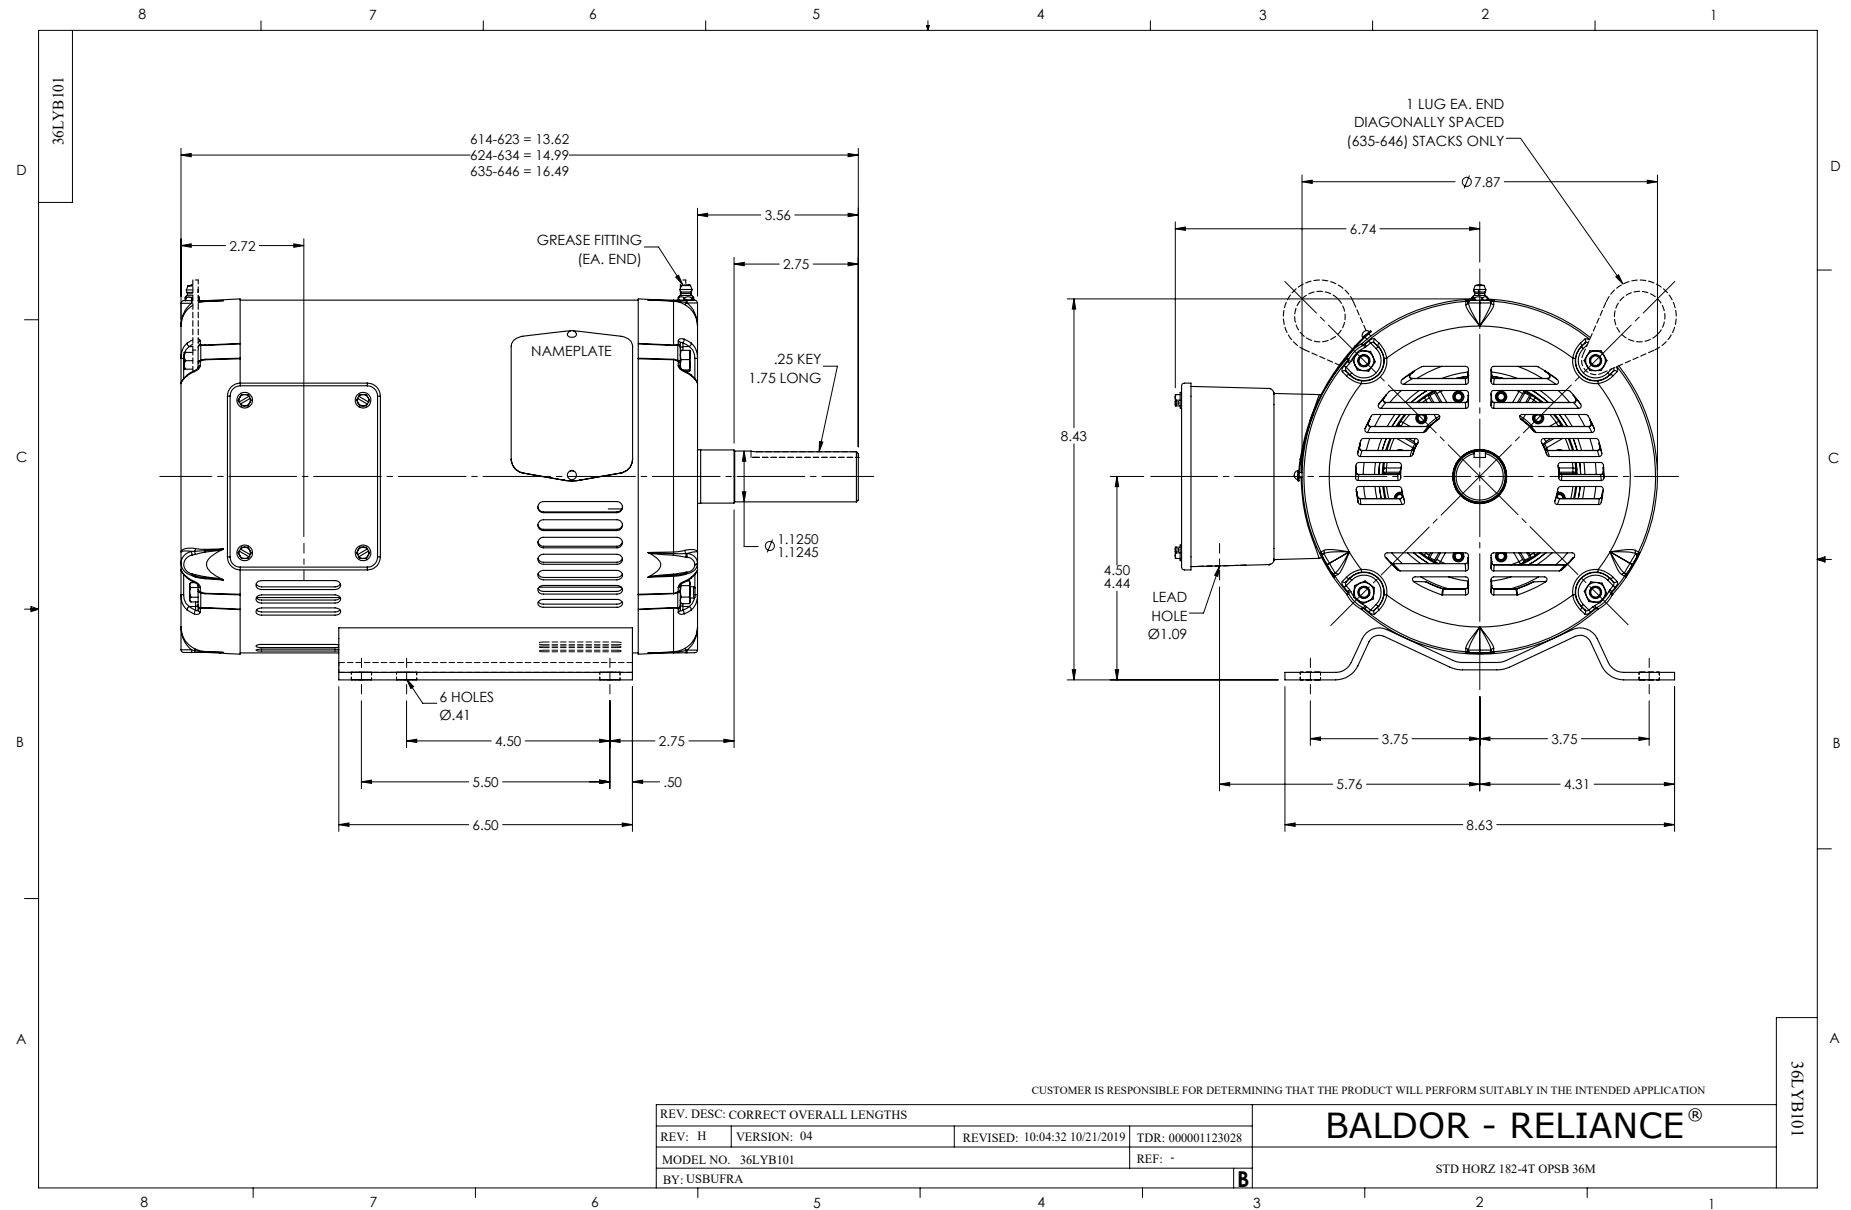


CD0006

TYPICAL WYE-CONNECTED MOTOR

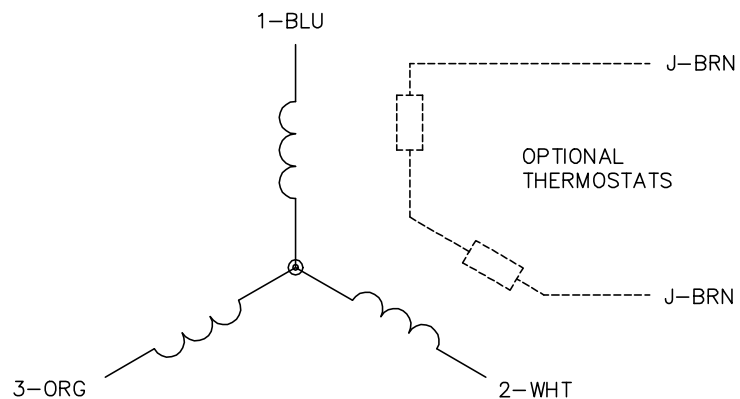

TYPICAL DELTA-CONNECTED MOTOR

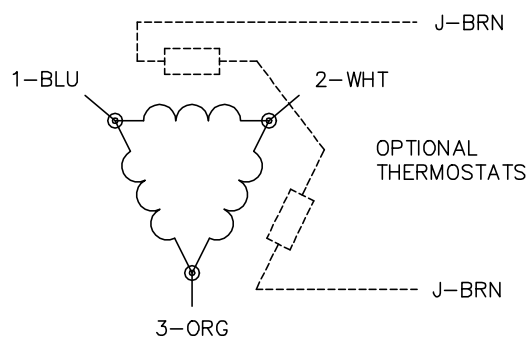

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007

REV. LTR: E

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\141

REVISED: 10:24:49 02/19/2019

BY: ENBRIRO

MTL: —

**BALDOR - RELIANCE®**

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1