



Customer information packet

EM3616T-5

7.5HP, 3470RPM, 3PH, 60HZ, 184T, 3646M, TEFC, F

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	184T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	7.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	CURUSEEV NEMA PREMIUM NEMA_PREMIUM UR CSA EEV
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	6.800 A @ 575.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater

Part detail

Revision	M
Type	AC
Mech. spec.	36G271
Base	
Status	PRD/A
Elec. spec.	36WGS478
Layout	36LYG271
Eff. date	06-03-2024
CD Diagram	CD0006
Poles	02
Leads	3#16
Proprietary	False
Created date	08-02-2010

High Voltage Full Load Amps	6.8 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	L
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3646M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	18.05 IN
Power Factor	93
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3470 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3441L									
CAT.NO.	EM3616T-5								
SPEC.	36G271S478G1								
HP	7.5								
VOLTS	575								
AMP	6.8								
RPM	3470								
FRAME	184T		HZ	60		PH	3		
SER.F.	1.15	CODE	L	DES	A	CL	F		
NEMA-NOM-EFF	89.5	PF	93						
RATING	40C AMB-CONT								
CC	010A								
DE	6206		ODE	6205					
ENCL	TEFC	SN							
VPWM INVERTER READY									
CT6-60H(10:1)VT3-60H(20:1)									

AC Induction Motor Performance Data

Record # 31190

Typical performance - not guaranteed values

Winding: 36WGS478-R001		Type: 3646M		Enclosure: TEFC			
Nameplate Data			575 V, 60 Hz: Single Voltage Motor				
Rated Output (HP)	7.5	Full Load Torque	11.4 LB-FT				
Volts	575	Start Configuration	direct on line				
Full Load Amps	6.8	Breakdown Torque	57.8 LB-FT				
R.P.M.	3470	Pull-up Torque	39.8 LB-FT				
Hz	60 Phase	3	Locked-rotor Torque	48.1 LB-FT			
NEMA Design Code	A	KVA Code	L	Starting Current	72.7 A		
Service Factor (S.F.)	1.15	No-load Current	1.86 A				
NEMA Nom. Eff.	89.5	Power Factor	93	Line-line Res. @ 25°C	2.26 Ω		
Rating - Duty	40C AMB-CONT		Temp. Rise @ Rated Load	74°C			
S.F. Amps			Temp. Rise @ S.F. Load	93°C			
			Locked-rotor Power Factor	45			
			Rotor inertia	0.205 LB-FT ²			

Load Characteristics 575 V, 60 Hz, 7.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	64	85	90	93	94	94	94
Efficiency	86.9	90.6	91	90	88.7	86.5	89.2
Speed	3571	3539	3505	3468	3429	3385	3445
Line amperes	2.51	3.67	5.14	6.74	8.41	10.3	7.74


ABB Motors and Mechanical Inc.

WINDING # 36WGS478


Typical performance - not guaranteed values.

7.5 HP 3 PH 60 HZ 3470 RPM 575 V 3646M


TORQUES (LB-FT): PO=57.8 PU=39.8 LR=48.1 LRA=72.7

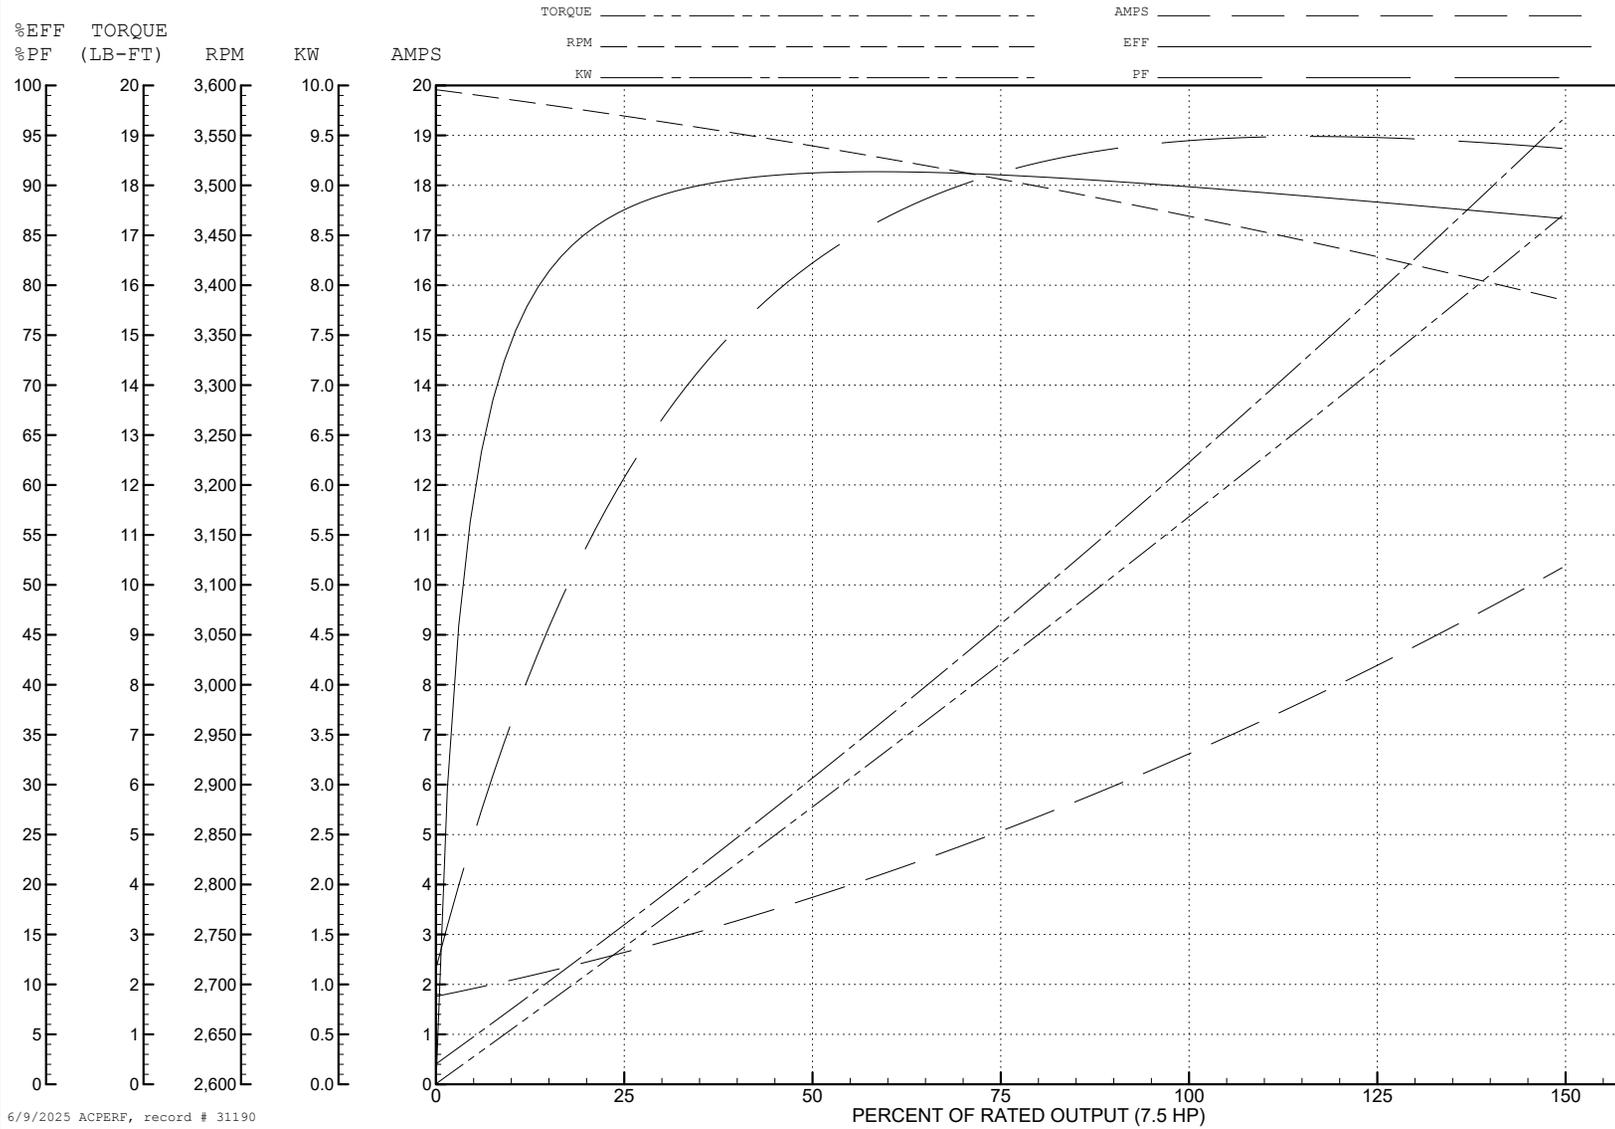

6/9/2025 ACPERF, record # 31190

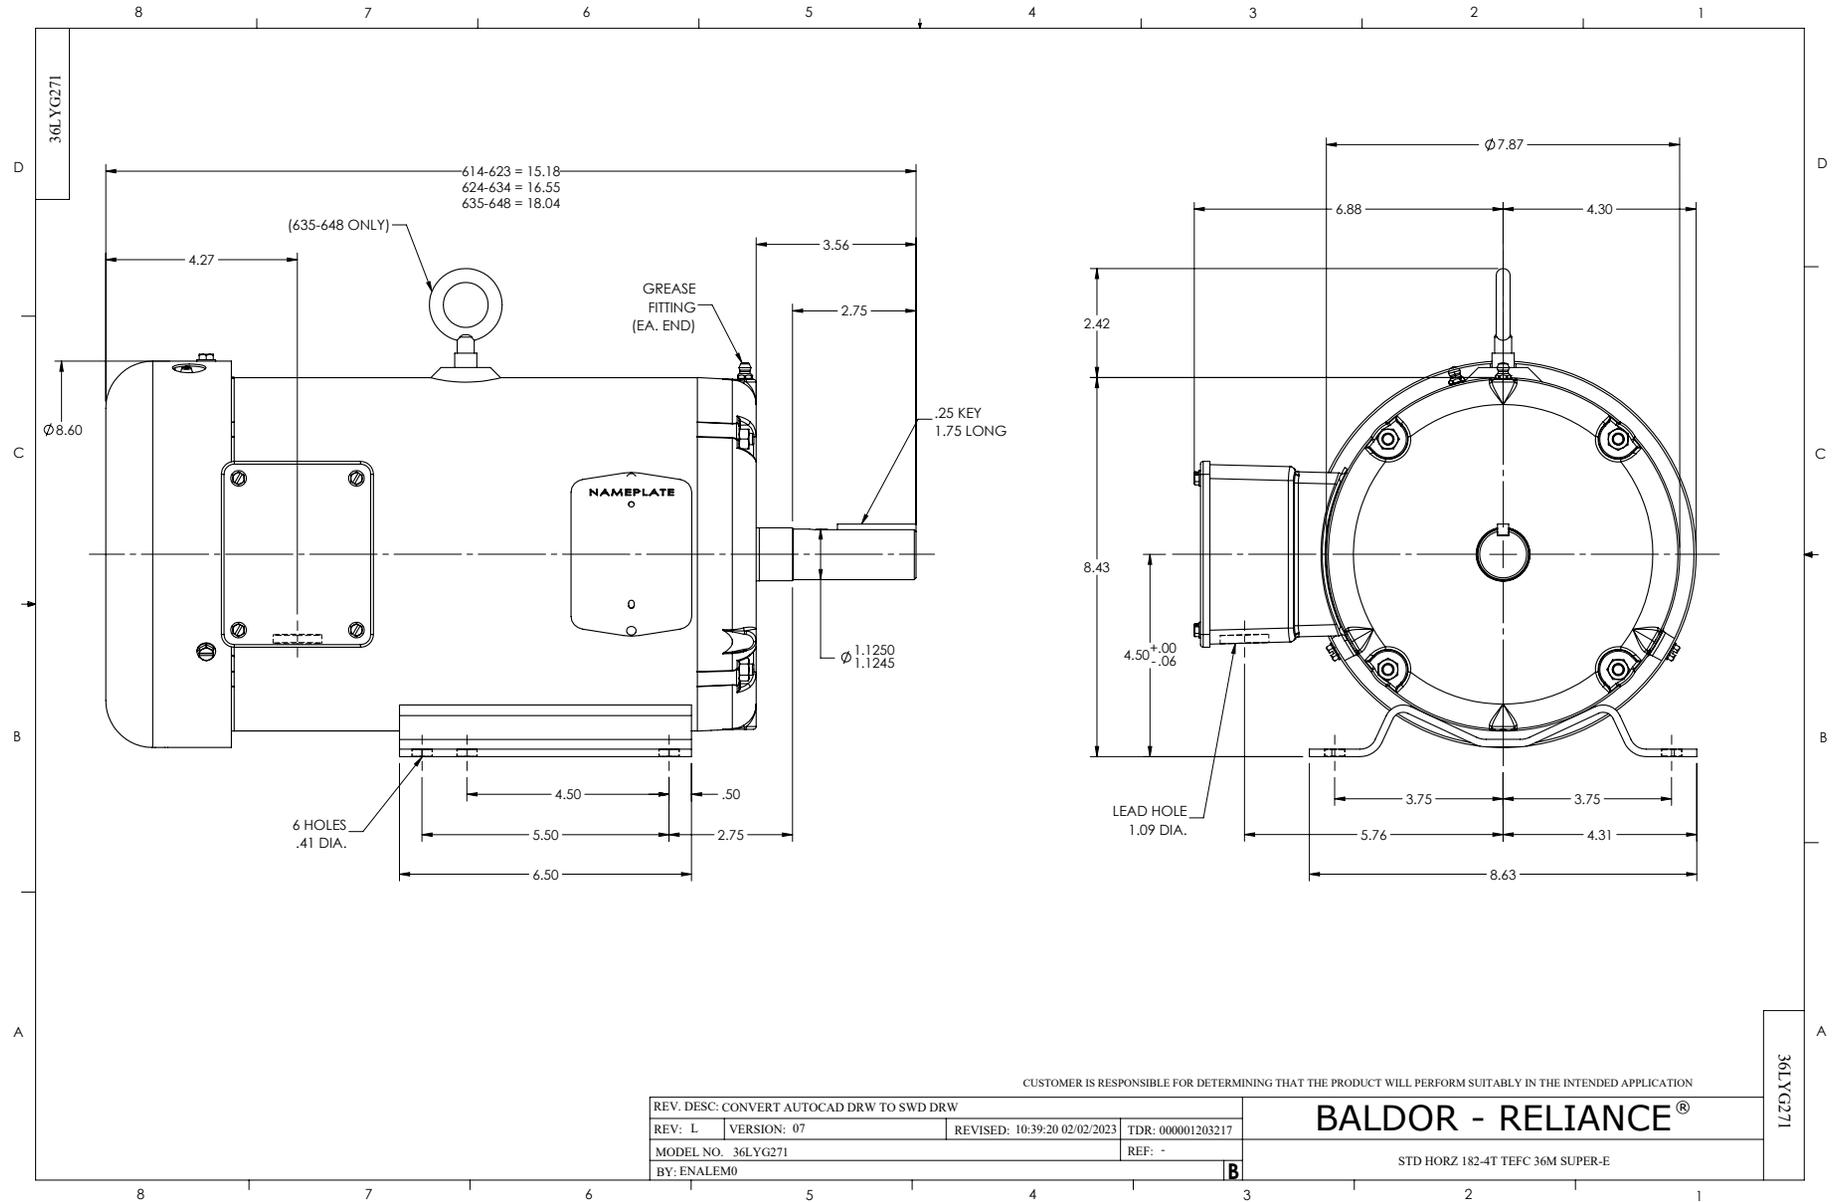

CD0006

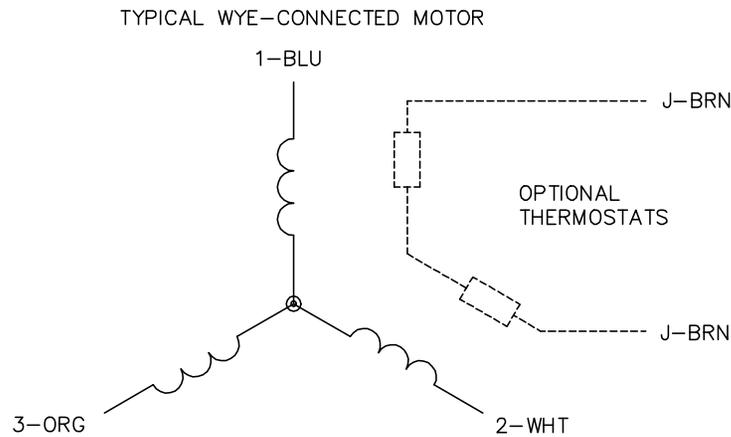

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10:24:49 02/19/2019	BY: ENBRIRO
MTL: -		© □

BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1