



Customer information packet

EM4400T-12

100HP, 1785RPM, 3PH, 60HZ, 405T, A40064M, TEFC

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	405T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	100.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV
Ambient Temperature	40 °C
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Current @ Voltage	112.000 A @ 460.0 V 224.000 A @ 230.0 V
Design Code	B
Duty Rating	CONT
Efficiency @ 100% Load	95.4 %
High Voltage Full Load Amps	112.0 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Motor Lead Quantity/Wire Size	12 @ 4 AWG
Motor Standards	NEMA
Motor Type	A40064M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	38.04 IN

Part detail

Revision	L
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A40WG0690
Layout	617429-001
Eff. date	09-04-2024
CD Diagram	416820-020
Poles	04
Leads	12#4
Proprietary	False
Created date	07-17-2013

Power Factor	87
Product Family	Other
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	2.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1785 rpm
Speed Code	Single Speed
Starting Method	Wye Start - Delta Run


Nameplate


NP2349L

SPEC NO.	P40G3925	CAT.NO.	EM4400T-12	FRAME	405T				
HP	100	VOLTS	230/460	PHASE	3	DESIGN	B	TYPE	P
RPM	1785	AMPS	224/112	HZ	60	AMB	40	SF	1.15
DRIVE END BEARING	80BC03J30X	DUTY	CONT	INSUL.CLASS	F				
OPP D.E. BEARING	80BC03J30X	ENCL	TEFC	CODE	G				
SER.NO.		POWER FACTOR	87	NEMA-NOM-EFFICIENCY	95.4				
				MAX CORR KVAR	18	GUARANTEED EFFICIENCY	94.5		
				NEMA NOM/CSA QUOTED EFF					
				MOTOR WEIGHT					

Accessories

Part number	Description	Multiplier
K40G2	C-FACE KIT FR400T 4/6/8POLE ONLY	A8
089412054B	D-FLANGE BRKT 400 089416055WCB	

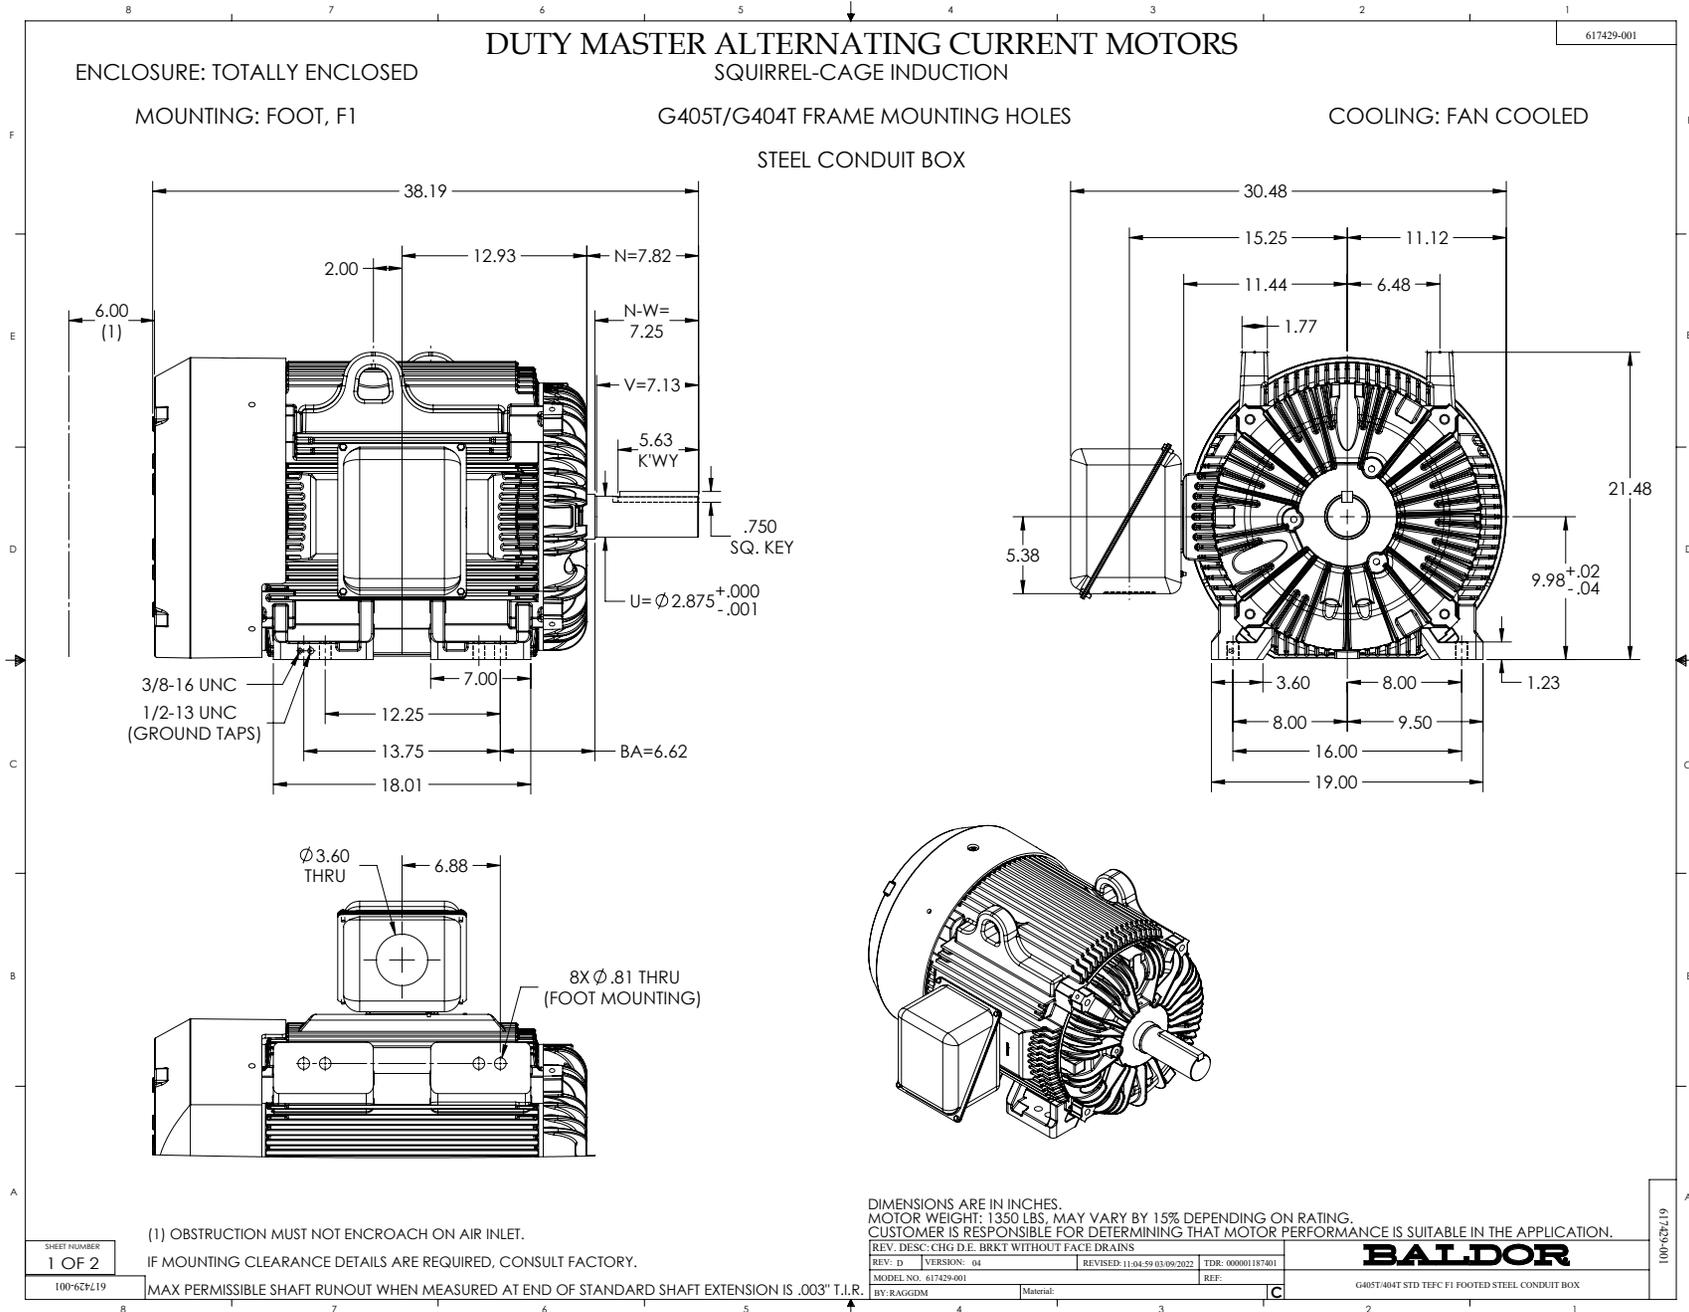


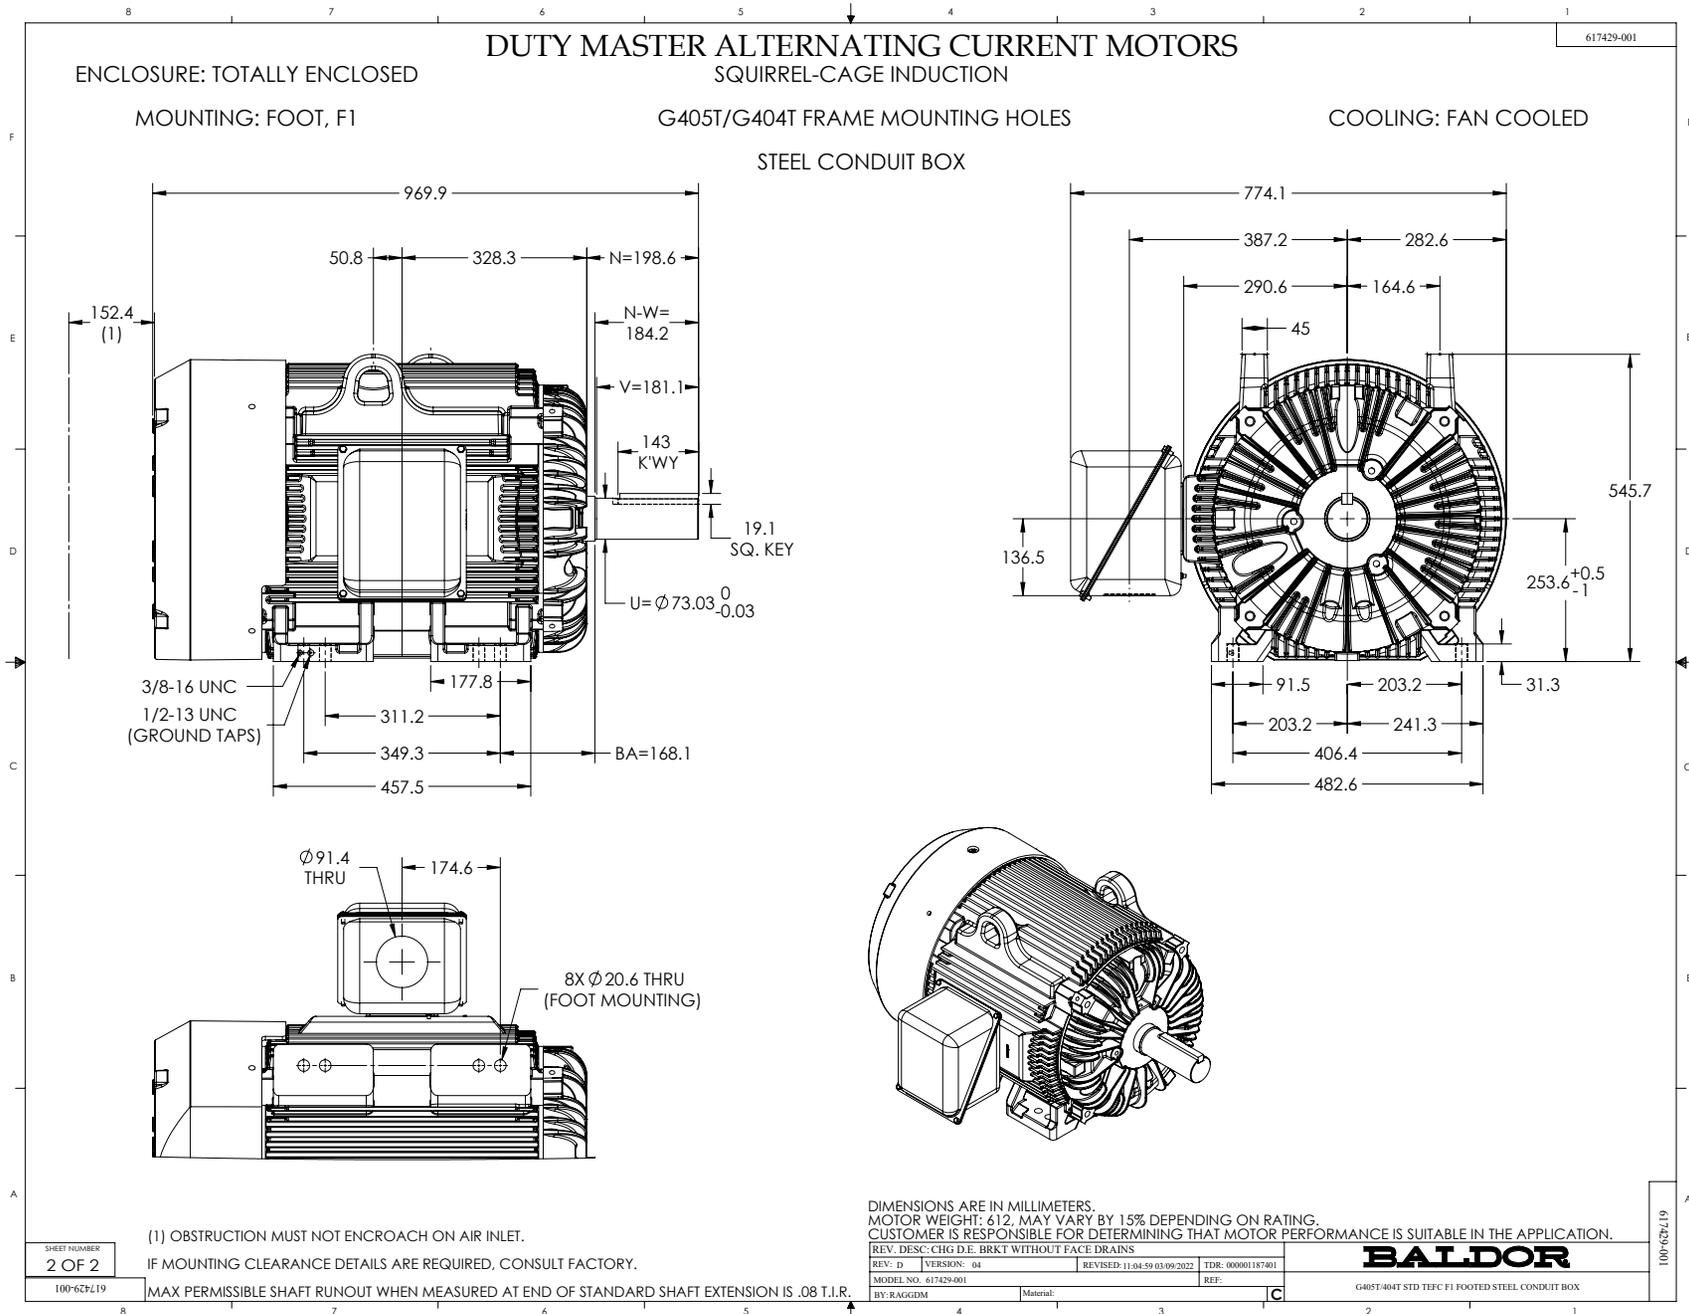

416820-020

A-C MOTOR
CONNECTION DIAGRAM

416820-020

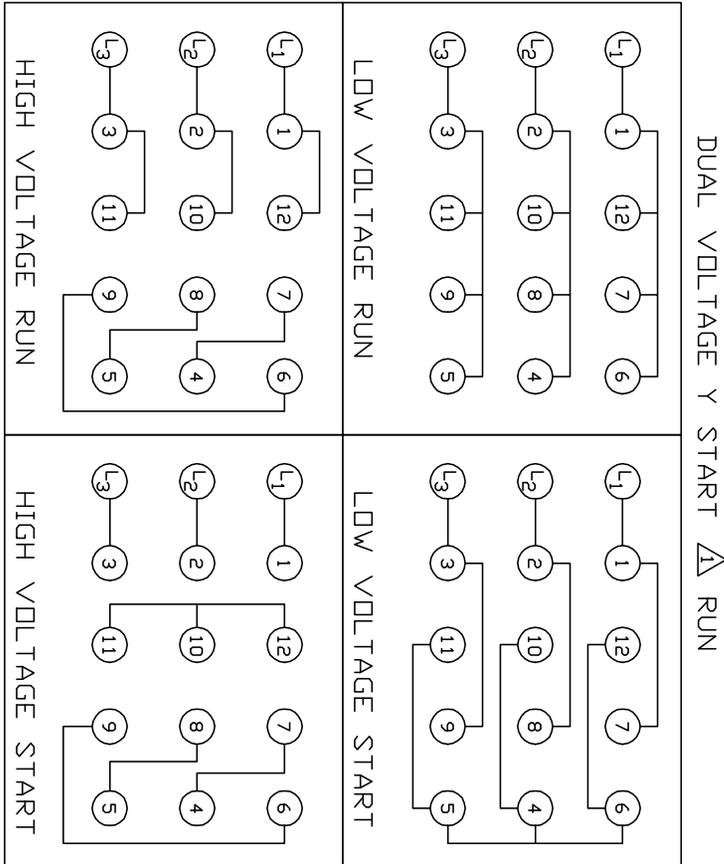

<410961-39 / 1575-AC>

CUSTOMER _____

CUSTOMER
ORDER NO. _____

S. O. NO. _____

REV. DESC: LOADED TO BUS		
REV. LTR: A	VERSION: 01	TDR: 00000553773
FILE: \RAG\00011\270	REVISED: 01:15:19 08/12/2010	
MTL: -	BY: RAGMTC	

BALDOR

A-C MOTOR CONNECTION DIAGRAM

SH 1 of 1